

NOTES


Detail I - With Bar Splicer or Couplers: Connect one (1) 1" x 7" 'x "W" steel P to the top layer of couplers with 2-5g" \$\phi\$ bolts screwed to coupler at approximate © of each barrier panel.


Detail II - With Extended Reinforcement Bars: Connect one (1) 1" x 7" x "W" steel P to the concrete slab or concrete wearing surface with 2-58" \$ Expansion Anchors or cast in place inserts spaced between the top layer of reinforcement at approximate & of each barrier panel.

Cost of anchorage is included with Temporary Concrete Barrier. The I" x 7" x "W" plate shall not be removed until stage II construction forms and all reinforcement bars are in place and the concrete is ready to be placed.

SECTIONS THRU SLAB OR DECK BEAM

- *** Dimension shown is minimum required embedment into concrete. If hot-mix asphalt wearing surface is present, minimum embedment shall be in addition to wearing surface depth.
- **** If existing deck beam is to remain in place after stage construction. embedment shall only be into wearing surface and not into existing deck beam concrete.

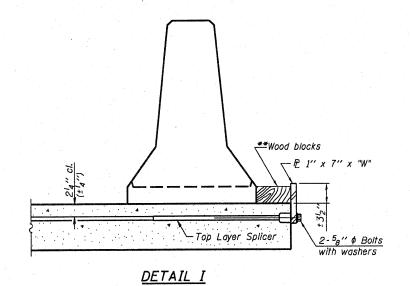

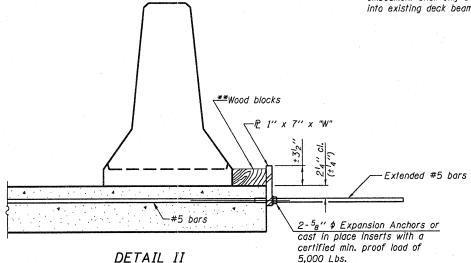

"W" Top bars Detail I 3" Detail II −⊈ ⁷e" ¢ Holes *@ 1" x 12" Notch

STEEL RETAINER P 1" x 7" x "W" * Required only with Detail II

** Wood blocks may be omitted when required to provide minimum stage traffic lane width. When the wood blocks are omitted, the concrete barrier shall be in direct contact

with the steel retainer plate.

"W" = Top bars spacing + 4"

7-1-10

USER NAME = DESIGNED - DLS REVISED -WILLS BURKE KELSEY ASSOCIATES LTD. FILE NAME = WBK 110 West Main Street, Suite 201 Sc. Charles, linios 60174 PLOT SCALE = REVISED -CHECKED - AEU PLOT SCALE = DRAWN - AWH REVISED -PLOT DATE * 06/24/2011 CHECKED - DLS REVISED

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION TEMPORARY CONCRETE BARRIER FOR STAGE CONSTRUCTION **STRUCTURE NO. 098-1067** SHEET NO. 3 OF 9 SHEETS

COUNTY TOTAL SHEETS NO. WHITESIDE 74 35 F.A.P. RTE. 309 SECTION 15T-1 CONTRACT NO. 64F23 ILLINOIS FED. AID PROJECT

R-27