

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

EAST EDGE OF SHOULDER

Location	Station	Offset	Theoretical Grade Elevations
End N. Appr. Slab	622+47.50	-18.00	465.08
A	622+57.50	-18.00	465.04
B	622+67.50	-18.00	465.02
Bk. N. Abut.	622+77.50	-18.00	465.01

EAST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
End N. Appr. Slab	622+47.50	-12.00	465.20
A	622+57.50	-12.00	465.17
B	622+67.50	-12.00	465.15
Bk. N. Abut.	622+77.50	-12.00	465.13

℄ ROADWAY, PG, AND STAGE CONSTRUCTION LINE


Location	Station	Offset	Theoretical Grade Elevations
End N. Appr. Slab	622+47.50	0.00	465.39
A	622+57.50	0.00	465.36
B	622+67.50	0.00	465.33
Bk. N. Abut.	622+77.50	0.00	465.32

WEST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
End N. Appr. Slab	622+47.50	12.00	465.20
A	622+57.50	12.00	465.17
B	622+67.50	12.00	465.15
Bk. N. Abut.	622+77.50	12.00	465.13

WEST EDGE OF SHOULDER

Location	Station	Offset	Theoretical Grade Elevations
End N. Appr. Slab	622+47.50	18.00	465.08
A	622+57.50	18.00	465.04
B	622+67.50	18.00	465.02
Bk. N. Abut.	622+77.50	18.00	465.01

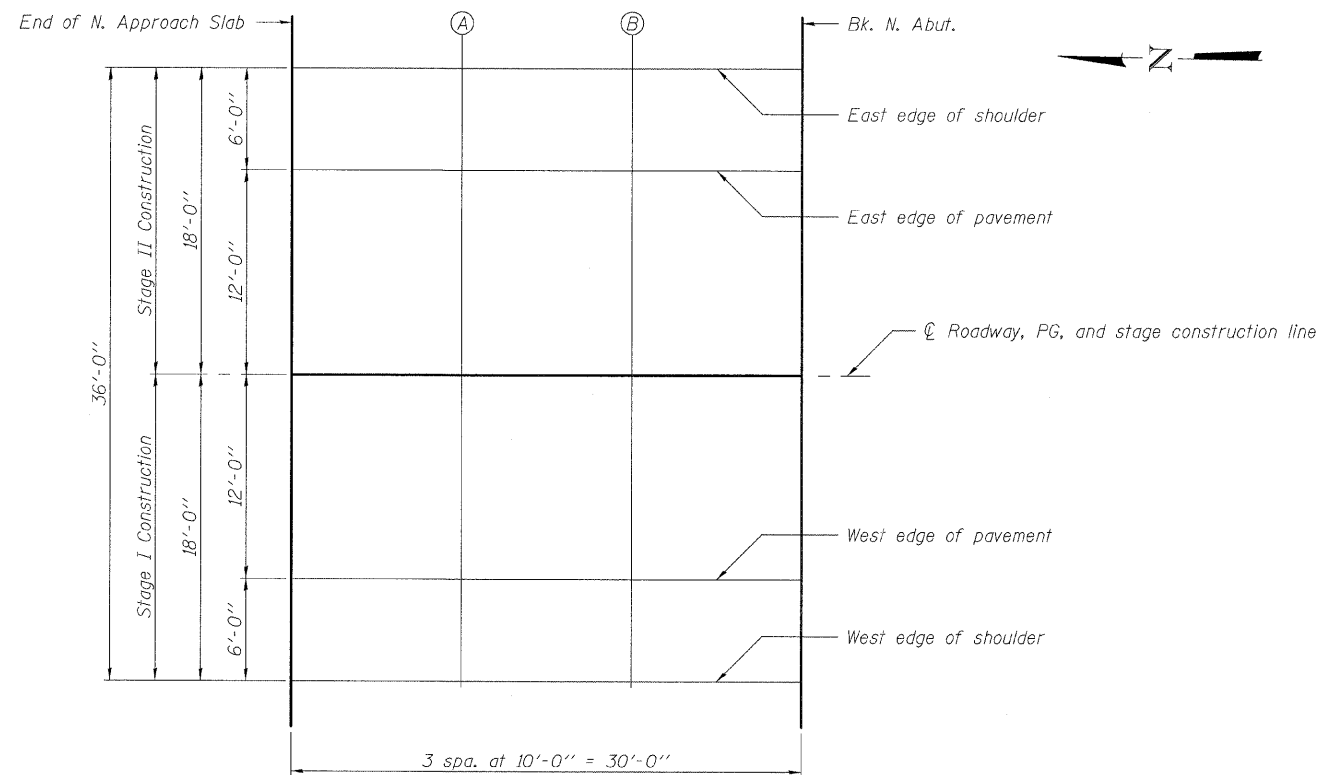

PLAN

TOP OF NORTH APPROACH  
SLAB ELEVATIONS  
STRUCTURE NO. 014-0079

DESIGNED	KAK
CHECKED	EML
DRAWN	KAK
CHECKED	EML

E-AS

11-1-09

**HORNER &  
SHIFRIN, INC.**  
ENGINEERS

SHEET NO. 9	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	690	481B	CLINTON	46	26
25 SHEETS	CONTRACT NO. 76C21				
FED. ROAD DIST. NO.		ILLINOIS	FED. AID PROJECT		