


07M03

SUMMARY OF QUANTITIES			TOTAL QUANTITIES	CONSTRUCTION TYPE CODE
CODE NO	ITEM	UNIT		0014
50102400	CONCRETE REMOVAL	CU YD	17.4	17.4
50157300	PROTECTIVE SHIELD	SO YD	100.9	100.9
50300255	CONCRETE SUPERSTRUCTURE	CU YD	17.4	17.4
50300260	BRIDGE DECK GROOVING	SO YD	35.1	35.1
50300300	PROTECTIVE COAT	SO YD	65.4	65.4
50500405	FURNISHING AND ERECTING STRUCTURAL STEEL	POUND	10,190	10,190
50500505	STUD SHEAR CONNECTORS	EACH	234	234
50800205	REINFORCEMENT BARS, EPOXY COATED	POUND	4,690	4,690
67100100	MOBILIZATION	L SUM	1	1
70100310	TRAFFIC CONTROL AND PROTECTION, STANDARD 701421	L SUM	1	1
70100420	TRAFFIC CONTROL AND PROTECTION, STANDARD 701411	EACH	1	1
70106800	CHANGEABLE MESSAGE SIGN	CAL MO	24	24
70400100	TEMPORARY CONCRETE BARRIER	FOOT	225	225
72000300	SIGN PANEL - TYPE 3	SO FT	135	135
73304000	OVERHEAD SIGN STRUCTURE - BRIDGE MOUNTED	FOOT	18	18
x5080600	MECHANICAL SPLICERS	EACH	246	246
x7010210	TRAFFIC CONTROL AND PROTECTION, STANDARD 701411 (SPECIAL)	EACH	1	1
Z0001901	JACK AND REPOSITION BEARINGS	EACH	1	1
Z0001903	STRUCTURAL STEEL REMOVAL	POUND	11,690	11,690
Z0030250	IMPACT ATTENUATORS, TEMPORARY (NON-REDIRECTIVE), TEST LEVEL 3	EACH	1	1
Z0073300	TEMPORARY SHORING AND CRIBBING	L SUM	1	1

SIGN DETAILS

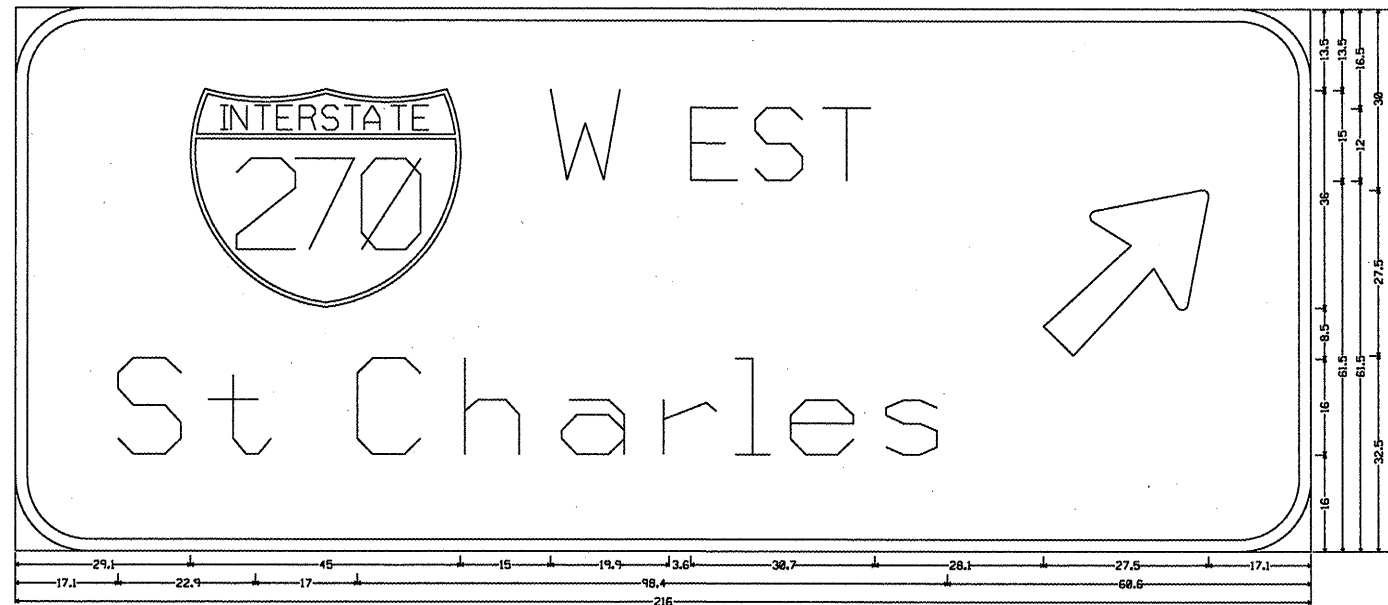

12.8" Radius, 2.8" Border, White on Green
 (W EST) Clearview-Hy-5-W (St Charles) Clearview-Hy-5-W Arrow 168 - 35.8" 45"

NOTES:

- FOR SIGN PANEL LOCATION, SEE SHEET 6 OF 15.
- SEE STRUCTURE PLANS FOR BRIDGE MOUNT DETAILS.
- SIGN PANEL SHALL BE TYPE ZZ RETROREFLECTIVE.