

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

WEST GUTTER LINE

Location	Station	Offset	Theoretical Grade Elevations
S. Edge of S. Appr. Slab	398+50.84	-16.00	832.33
A1	398+60.84	-16.00	832.44
A2	398+70.84	-16.00	832.55
N. Edge of S. Appr. Slab	398+80.84	-16.00	832.65

WEST E.O.P.

Location	Station	Offset	Theoretical Grade Elevations
S. Edge of S. Appr. Slab	398+47.12	-12.00	832.36
A1	398+57.12	-12.00	832.48
A2	398+67.12	-12.00	832.59
N. Edge of S. Appr. Slab	398+77.12	-12.00	832.69

℄ & P.G.L. ROADWAY


Location	Station	Offset	Theoretical Grade Elevations
S. Edge of S. Appr. Slab	398+35.94	0.00	832.40
A1	398+45.94	0.00	832.53
A2	398+55.94	0.00	832.66
N. Edge of S. Appr. Slab	398+65.94	0.00	832.77

EAST E.O.P.

Location	Station	Offset	Theoretical Grade Elevations
S. Edge of S. Appr. Slab	398+24.76	12.00	832.04
A1	398+34.76	12.00	832.19
A2	398+44.76	12.00	832.33
N. Edge of S. Appr. Slab	398+54.76	12.00	832.45

EAST GUTTER LINE

Location	Station	Offset	Theoretical Grade Elevations
S. Edge of S. Appr. Slab	398+21.04	16.00	831.90
A1	398+31.04	16.00	832.05
A2	398+41.04	16.00	832.20
N. Edge of S. Appr. Slab	398+51.04	16.00	832.33

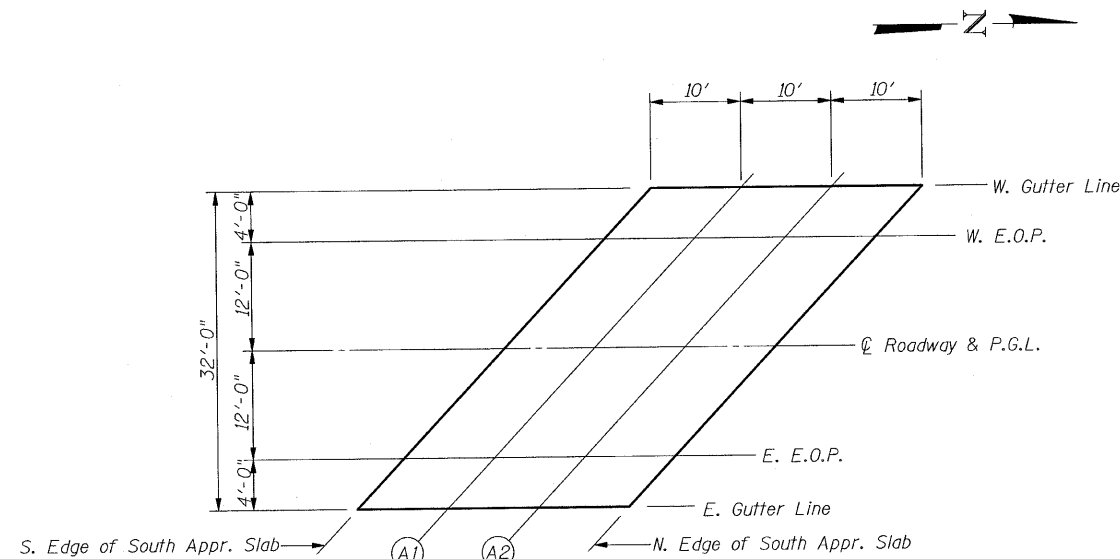

PLAN

TOP OF SOUTH APPROACH
SLAB ELEVATIONS
S.N. 101-0120

DESIGNED	SCD
CHECKED	DRB
DRAWN	THW
CHECKED	SCD



IE CONSULTANTS, INC.
6420 SOUTH SIXTH STREET
SPRINGFIELD, ILLINOIS 62712
TEL. (217) 529-8027
FAX (217) 529-4643
WWW.IE-CONSULTANTS.COM

E-AS

11-1-09

SHEET NO. 8 OF 34 SHEETS	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	301	(1-1HB-1)D	WINNEBAGO	55	24
CONTRACT NO. 64E11					
ILLINOIS FED. AID PROJECT					