
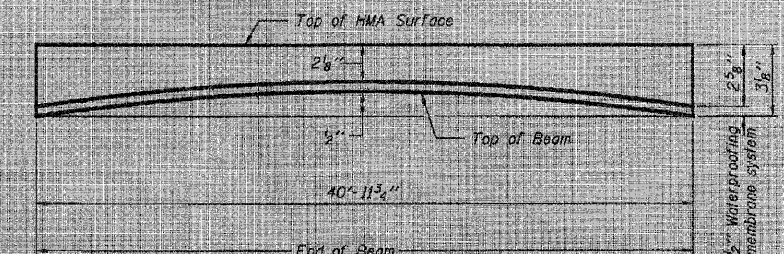
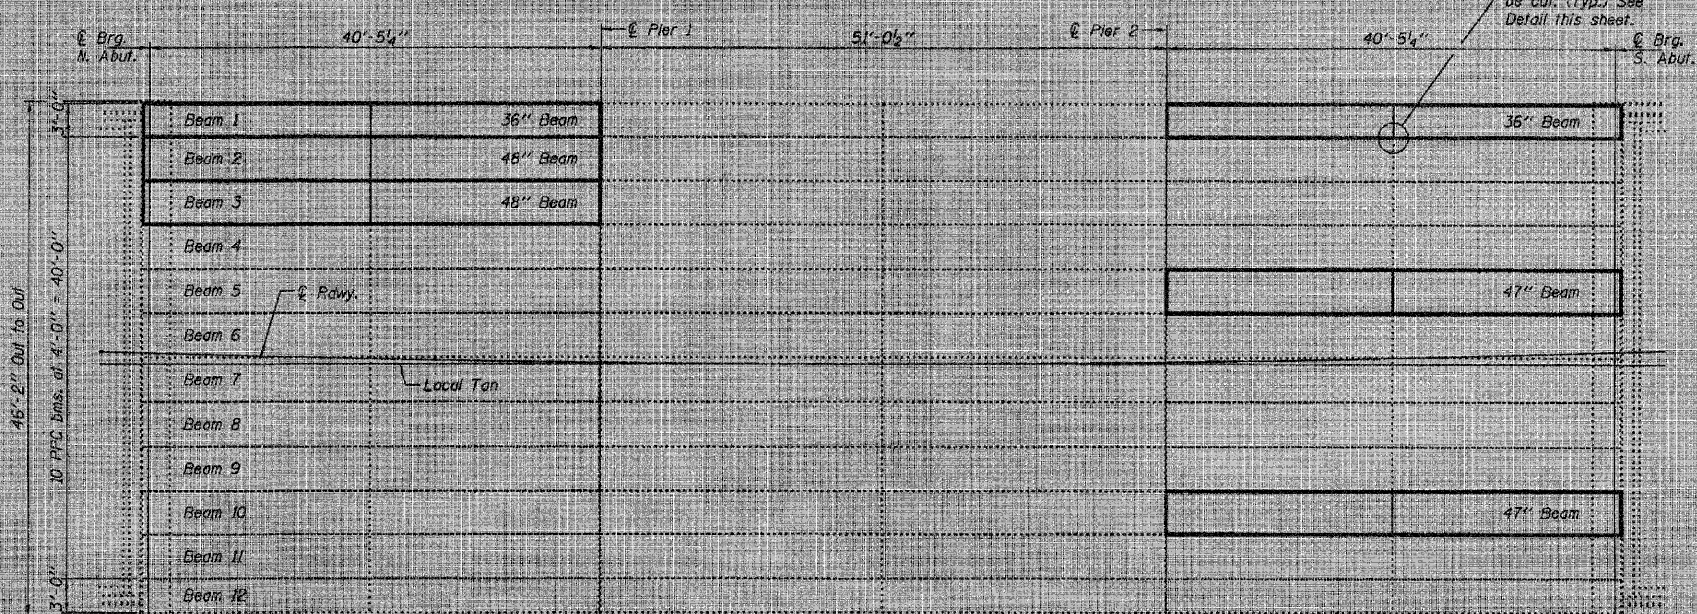


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

PROJECT NO.	SECTION	DATE	SHEET	SHEET NO. /
FA 68	LIVINGSTON	10	11	5 SHEETS
Contract Number: 66810				


GENERAL NOTES

Reinforcement bars shall conform to the requirements of ASTM A 706 Gr 60 (IL Modified). See Special Provisions.
 Reinforcement bars designated (E) shall be epoxy coated.
 Plan dimensions and details relative to existing plans are subject to routine variations. The Contractor shall field verify existing dimensions and details affecting new construction and make necessary approved adjustments prior to construction or ordering of materials. Such variations shall not be cause for additional compensation for a change in scope of the work, however, the Contractor will be paid for the quantity actually furnished based upon the unit price bid for the work.
 The contractor is advised that the existing PPC Deck Beams are in a deteriorated condition with reduced load carrying capacity. It is the contractor's responsibility to account for the condition of the beams when developing construction procedures.
 If the contractor's procedure for existing beam removal or placement of new beams involves placement of cranes or other heavy equipment on the bridge, a detailed procedure shall be submitted to the Engineer for approval. The procedure shall include calculations, prepared and sealed by an Illinois Licensed Structural Engineer, verifying that the equipment and procedure used will not overstress the new or existing beams. To distribute load to multiple beams and protect the existing surface, in all cases a double layer mat of heavy timbers shall be used at all times under crane tracks or wheels and any outriggers in the down position. If necessary, shims shall be used under the crane mat to ensure uniform contact with the underlying beams. If heavy equipment will be placed on new PPC deck beams, the following shall be done prior to placement of the timbers: placement and tightening of transverse tie assemblies, grouting and curing the dowel rods 24 hours minimum and grouting and curing the shear keys.
 The top surface of the beams shall be finished according to the IDOT Manual for Fabrication of Precast Prestressed Concrete Products.
 Any damage done to the bridge during beam removal shall be repaired by the Contractor. Cost to be included in the cost of Removal of Existing PPC Deck Beams.
 Temporary concrete barrier shall only be anchored into the overlay and not into the PPC Deck Beams.

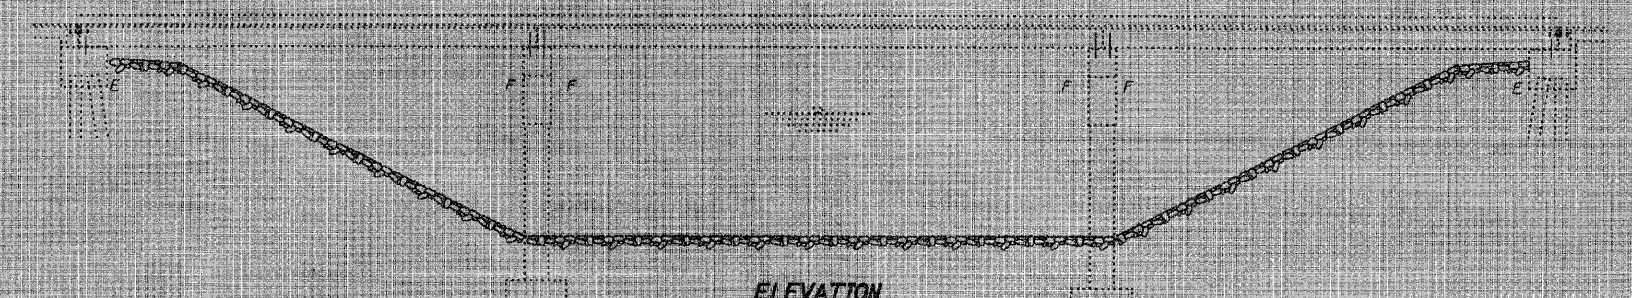


ANTICIPATED INITIAL CAMBER DIAGRAM

PLAN

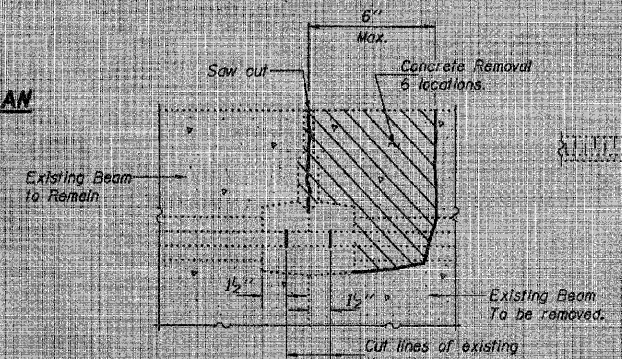

BEAM REMOVAL DETAIL AT TRANSVERSE TIES

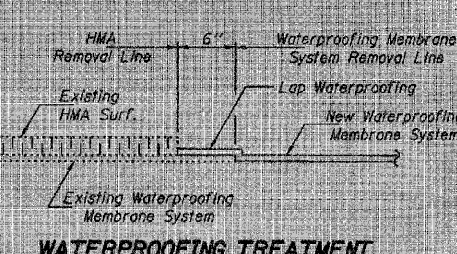

WATERPROOFING TREATMENT

DESIGN STRESSES
 PRECAST PRESTRESSED UNITS
 $f'_c = 6,000$ psi
 $f'_{ci} = 5,000$ psi
 $f'_s = 270,000$ psi (1/2" low lax strands)
 $f'_s = 201,960$ psi (5/8" low lax strands)

TOTAL BILL OF MATERIAL

ITEM	UNIT	QUANTITY
Removal of Existing PPC Deck Beams	Sq. Ft.	901.5
Precast Prestressed Concrete Deck Beams (21" Depth)	Sq. Ft.	894.7
Hot-Mix Asphalt Surface Removal	Sq. Yd.	14.9
HMA Surface Course, Mix "C" NSD	Tons	13.9
Waterproofing Membrane System	Sq. Yd.	103.8
PC Mortar Filling Course	Foot	328
Concrete Removal	Cu. Yd.	9.3
Concrete Superstructure	Cu. Yd.	9.3
Reinforcement Bars, Epoxy Coated	Pounds	1420

PLAN AND ELEVATION
FA 68 OVER SHORT POINT CREEK
LIVINGSTON COUNTY
SN 053-0161



DESIGNED: *[Signature]*
 CHECKED: *[Signature]*
 DRAWN: *[Signature]*
 CHECKED: *[Signature]*
 MAY 2, 2008
 EXAMINED: *[Signature]*
 PASSED: *[Signature]*
 Expires: November 30, 2008

C:\projects\ms\0530161.dgn 5/2/2008 9:45:08 AM

FILE NAME =	USER NAME = IDOTCAD	DESIGNED - SPF	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	EXISTING BRIDGE PLANS FOR INFORMATION ONLY	F.A. RTE. 68	SECTION (102) BR-1	COUNTY LIVINGSTON	TOTAL SHEETS 58	SHEET NO. 47
W:\2299-03 - IL Route 23 Roadway\0530161.dgn	CD Sheets\0366822-Existing Structure Plans.dgn	DRAWN - AJP	REVISED -		SCALE: NONE	SHEET NO. 10 OF 15 SHEETS	STA. TO STA.	CONTRACT NO. 66822		ILLINOIS FED. AID PROJECT
		CHECKED - JMS	REVISED -							
		PLOT SCALE = @ 2100' / in.	REVISED -							
		PLOT DATE = 8/2/2010	DATE - 08/05/10							