

| ROUTE NO.             | SECTION | COUNTY   | SHEET NO.        | TOTAL SHEETS |
|-----------------------|---------|----------|------------------|--------------|
| FAS 447               | *       | Fulton   | 43               | 3            |
| FED. ROAD DIST. NO. 7 |         | ILLINOIS | FED. AID PROJECT |              |

48101200

| AGGREGATE SHOULDERS, TYPE B |    |               |                  | TONS |
|-----------------------------|----|---------------|------------------|------|
| LOCATION                    |    |               |                  |      |
| STA. 5+50.00                | TO | STA. 7+12.75  | mainline LT/RT   | 62   |
| STA. 13+73.25               | TO | STA. 15+73.25 | mainline LT      | 37   |
| STA. 13+73.25               | TO | STA. 14+13.25 | mainline RT      | 9    |
| STA. 14+94.00               | TO | STA. 15+73.25 | mainline RT      | 14   |
| STA. 0+12.00                | TO | STA. 2+00.00  | Mt. Pisgah LT/RT | 70   |
| TOTAL                       |    |               |                  | 192  |

63100075

| TRAFFIC BARRIER TERMINAL, TYPE 5A |    |               |       | EACH |
|-----------------------------------|----|---------------|-------|------|
| LOCATION                          |    |               |       |      |
| STA. 7+01.25                      | TO | STA. 7+14.50  | LT/RT | 2    |
| STA. 13+71.50                     | TO | STA. 13+84.75 | LT/RT | 2    |
| TOTAL                             |    |               |       | 4    |

72100100

| SIGN PANEL OVERLAY |         |                    | SO. FT. |
|--------------------|---------|--------------------|---------|
| LOCATION           |         |                    |         |
| STA. 5+50.00       | 20' RT, | Speed Limit 30 mph | 5       |
| STA. 15+75.00      | 20' LT, | Speed Limit 30 mph | 5       |
| STA. 20+75.00      | 20' LT, | Speed Zone Ahead   | 5       |
| TOTAL              |         |                    | 15      |

50300260

| BRIDGE DECK GROOVING            |  | SO. YDS. |
|---------------------------------|--|----------|
| LOCATION                        |  |          |
| Bridge Approach Pav't           |  | 172      |
| Bridge Approach Pav't Connector |  | 54       |
| Bridge Deck                     |  | 2516     |
| TOTAL                           |  | 2742     |

LR631020

| TRAFFIC BARRIER TERMINAL, TYPE I |    |               |        | EACH |
|----------------------------------|----|---------------|--------|------|
| LOCATION                         |    |               |        |      |
| STA. 4+67.75                     | TO | STA. 4+92.75  | RT     | 1    |
| STA. 14+69.50                    | TO | STA. 14+69.50 | Far RT | 1    |
| STA. 16+53.25                    | TO | STA. 16+78.25 | LT     | 1    |
| TOTAL                            |    |               |        | 3    |

72900100

| METAL POST - TYPE A |        |  | FOOT |
|---------------------|--------|--|------|
| LOCATION            |        |  |      |
| STA. 5+50.00        | 20' RT |  | 17   |
| STA. 15+75.00       | 20' LT |  | 17   |
| STA. 20+75.00       | 20' LT |  | 17   |
| TOTAL               |        |  | 51   |

50300300

| PROTECTIVE COAT                 |  | SO. YDS. |
|---------------------------------|--|----------|
| LOCATION                        |  |          |
| P.C.C. Pav't, 8"                |  | 1397     |
| Bridge Approach Pav't           |  | 172      |
| Bridge Approach Pav't Connector |  | 54       |
| Bridge Deck                     |  | 2807     |
| TOTAL                           |  | 4430     |

63200310

| GUARDRAIL REMOVAL |    |               |    | FOOT |
|-------------------|----|---------------|----|------|
| LOCATION          |    |               |    |      |
| STA. 6+54.00      | TO | STA. 6+96.00  | LT | 42   |
| STA. 6+54.00      | TO | STA. 6+96.00  | RT | 42   |
| STA. 13+88.00     | TO | STA. 14+34.00 | LT | 46   |
| STA. 13+88.00     | TO | STA. 14+18.00 | RT | 30   |
| TOTAL             |    |               |    | 160  |

63000003

| STEEL PLATE BEAM GUARDRAIL, TYPE A |    |               |    | FOOT |
|------------------------------------|----|---------------|----|------|
| LOCATION                           |    |               |    |      |
| STA. 4+80.25                       | TO | STA. 7+01.25  | LT | 221  |
| STA. 4+92.75                       | TO | STA. 7+01.25  | RT | 209  |
| STA. 13+84.75                      | TO | STA. 16+53.25 | LT | 269  |
| STA. 13+84.75                      | TO | STA. 14+11.50 | RT | 27   |
| STA. 14+91.75                      | TO | STA. 16+65.75 | RT | 174  |
| TOTAL                              |    |               |    | 900  |

63300725


| STEEL PLATE BEAM GUARDRAIL (SHORT RADIUS) |    |               |    | FOOT |
|---|----|---------------|----|------|
| LOCATION                                  |    |               |    |      |
| STA. 14+69.25                             | TO | STA. 14+91.75 | RT | 40   |
| TOTAL                                     |    |               |    | 40   |

63100045

| TRAFFIC BARRIER TERMINAL, TYPE 2 |    |               |    | EACH |
|----------------------------------|----|---------------|----|------|
| LOCATION                         |    |               |    |      |
| STA. 4+67.75                     | TO | STA. 4+80.25  | LT | 1    |
| STA. 16+65.75                    | TO | STA. 16+78.25 | RT | 1    |
| TOTAL                            |    |               |    | 2    |

72000100

| SIGN PANEL - TYPE I |        |  | SO. FT. |
|---------------------|--------|--|---------|
| LOCATION            |        |  |         |
| STA. 5+50.00        | 20' RT |  | 5       |
| STA. 15+75.00       | 20' LT |  | 5       |
| STA. 20+75.00       | 20' LT |  | 5       |
| TOTAL               |        |  | 15      |

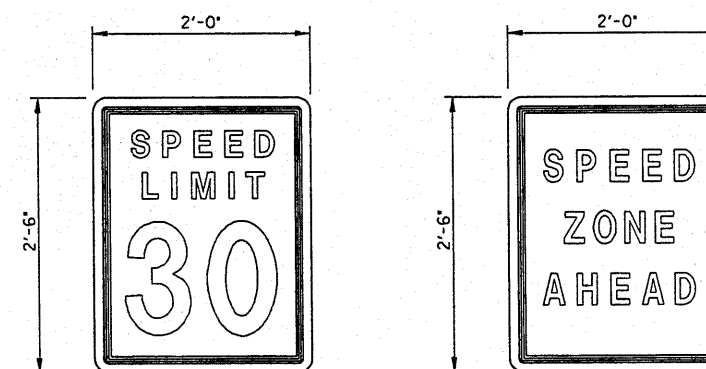

TYPICAL REGULATORY SIGN PANEL OVERLAYS  
WITH BLACK LETTERING ON REFLECTIVE WHITE BACKGROUNDS

|      |                   |     |      |          |    |
|------|-------------------|-----|------|----------|----|
| DSGN | K.J. Hoffmann     |     |      |          |    |
| DR   | K.J. Hoffmann     |     |      |          |    |
| CHK  | J.A. Frauenhoffer |     |      |          |    |
| APVD | J.A. Frauenhoffer | NO. | DATE | REVISION | BY |

**FRAUENHÖFFER**

Frauenhoffer and Associates, P.C. Consulting Engineers  
3002 Crossing Court Champaign, IL 61822 217-351-6268

SCHEDULE OF QUANTITIES

FAS 447 (C.H. 17) OVER SPOON RIVER  
SECTION 08-00121-01-BR  
FULTON COUNTY

|          |          |
|----------|----------|
| SHEET    | 3        |
| DWG NO.  | SOQ.dgn  |
| DATE     | JAN 2010 |
| PROJ NO. | 8015     |