F.A.P.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
330	465 VB-R-1	COOK	103	93
STA. 173+50	TO	STA. 195+00		
FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT		

Contract = 60407 SHEET NO. S60 of S60

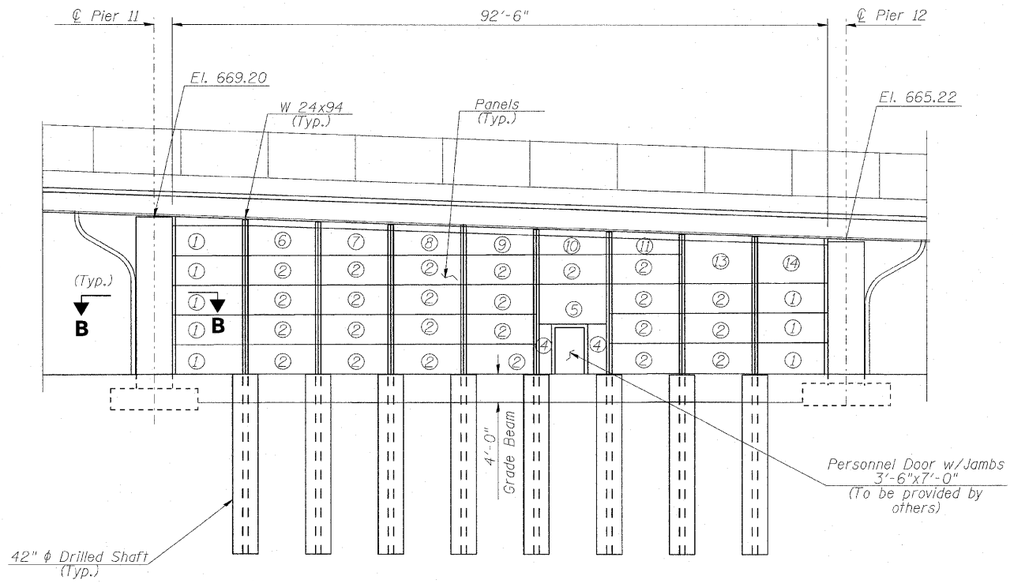

EAST ELEVATION

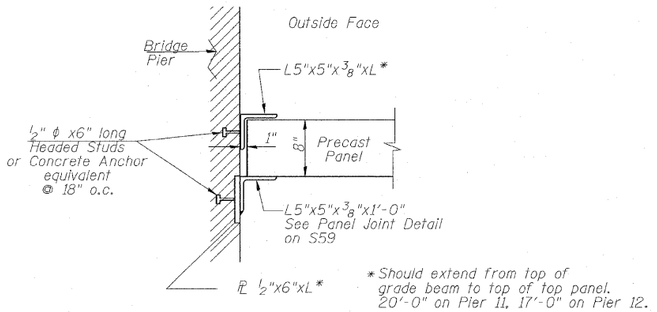

* Should extend from top of grade beam to top of top panel. 20'-0" on Pier 11, 17'-0" on Pier 12.

SECTION B-B

NOMINAL PANEL DIMENSIONS

(Refer to Note 12 on Sheet S59)

Type	Length	A	B	Thickness	No. Panels
1	11'-3"	4'-0"	4'-0"	8"	18
2	10'-0"	4'-0"	4'-0"	8"	49
3	20'-0"	4'-0"	4'-0"	8"	1
4	3'-2"	7'-0"	7'-0"	8"	2
5	10'-0"	5'-0"	5'-0"	8"	1
6	10'-0"	4'-0"	3'-7"	8"	2
7	10'-0"	3'-7"	3'-2"	8"	2
8	10'-0"	3'-2"	2'-9"	8"	1
9	10'-0"	2'-9"	2'-4"	8"	1
10	10'-0"	2'-4"	1'-11"	8"	2
11	10'-0"	1'-11"	1'-6"	8"	2
12	20'-0"	3'-2"	2'-4"	8"	1
13	10'-0"	5'-11"	5'-6"	8"	2
14	11'-3"	5'-6"	5'-0"	8"	2





DETAIL C
PANEL SUPPORT ANGLE

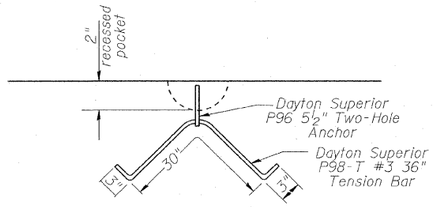

LIFTING INSERT DETAIL

Panels 1-3 & 5-14 will use two inserts, each placed at third points along long edge. Panel 4 will use two inserts, each placed at 1'-1" from ends on short edge to be placed upright.

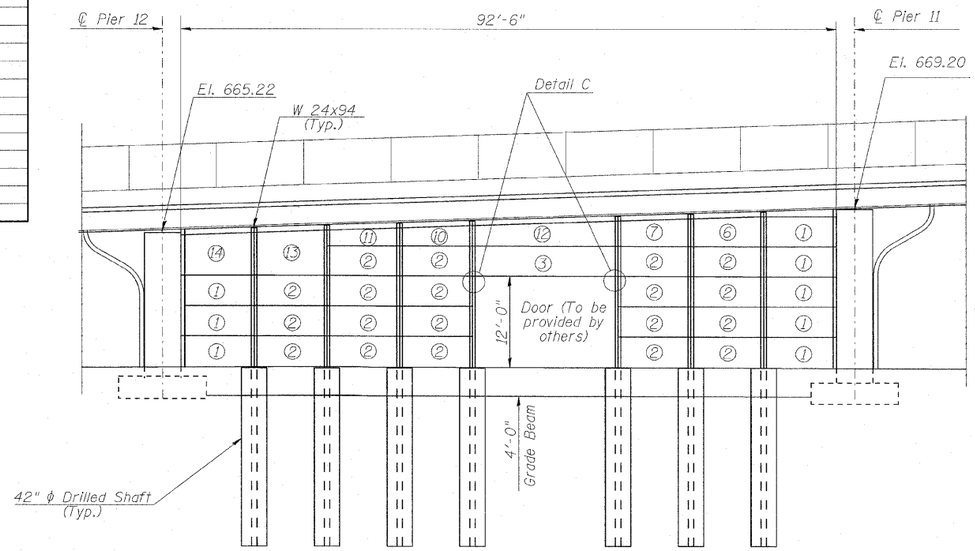

WEST ELEVATION

REVISIONS	
NAME	DATE

EARTH TECH | AECOM

ILLINOIS DEPARTMENT OF TRANSPORTATION

MAINTENANCE ENCLOSURE ELEVATION

FAP 330 US 12/45 (MANNHEIM RD.) OVER SOO LINE RR & FRANKLIN AVE.
STRUCTURE NO. 016-2815
SECTION 465 VB-R-1 COOK CO.
STA. 183+33.30 DR
DATE 7/2009

9/23/2009 60EeW_Er09.dgn