

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

WEST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
Bk. N. Abutment	20+71.20	-24.00	726.75
CC	20+81.15	-24.00	726.79
DD	20+91.09	-24.00	726.83
End of N. Appr. Pav't	21+01.04	-24.00	726.87

P.G.L. / EAST EDGE OF PAVEMENT


Location	Station	Offset	Theoretical Grade Elevations
Bk. N. Abutment	20+71.39	0.00	726.25
CC	20+81.37	0.00	726.29
DD	20+91.34	0.00	726.33
End of N. Appr. Pav't	21+01.32	0.00	726.37

WEST CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
Bk. N. Abutment	20+71.12	-34.31	726.97
CC	20+81.05	-34.40	727.01
DD	20+90.98	-34.91	727.06
End of N. Appr. Pav't	21+00.91	-35.02	727.10

EAST CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
Bk. N. Abutment	20+71.44	6.02	726.13
CC	20+81.42	5.94	726.17
DD	20+91.41	6.25	726.20
End of N. Appr. Pav't	21+01.39	6.14	726.25

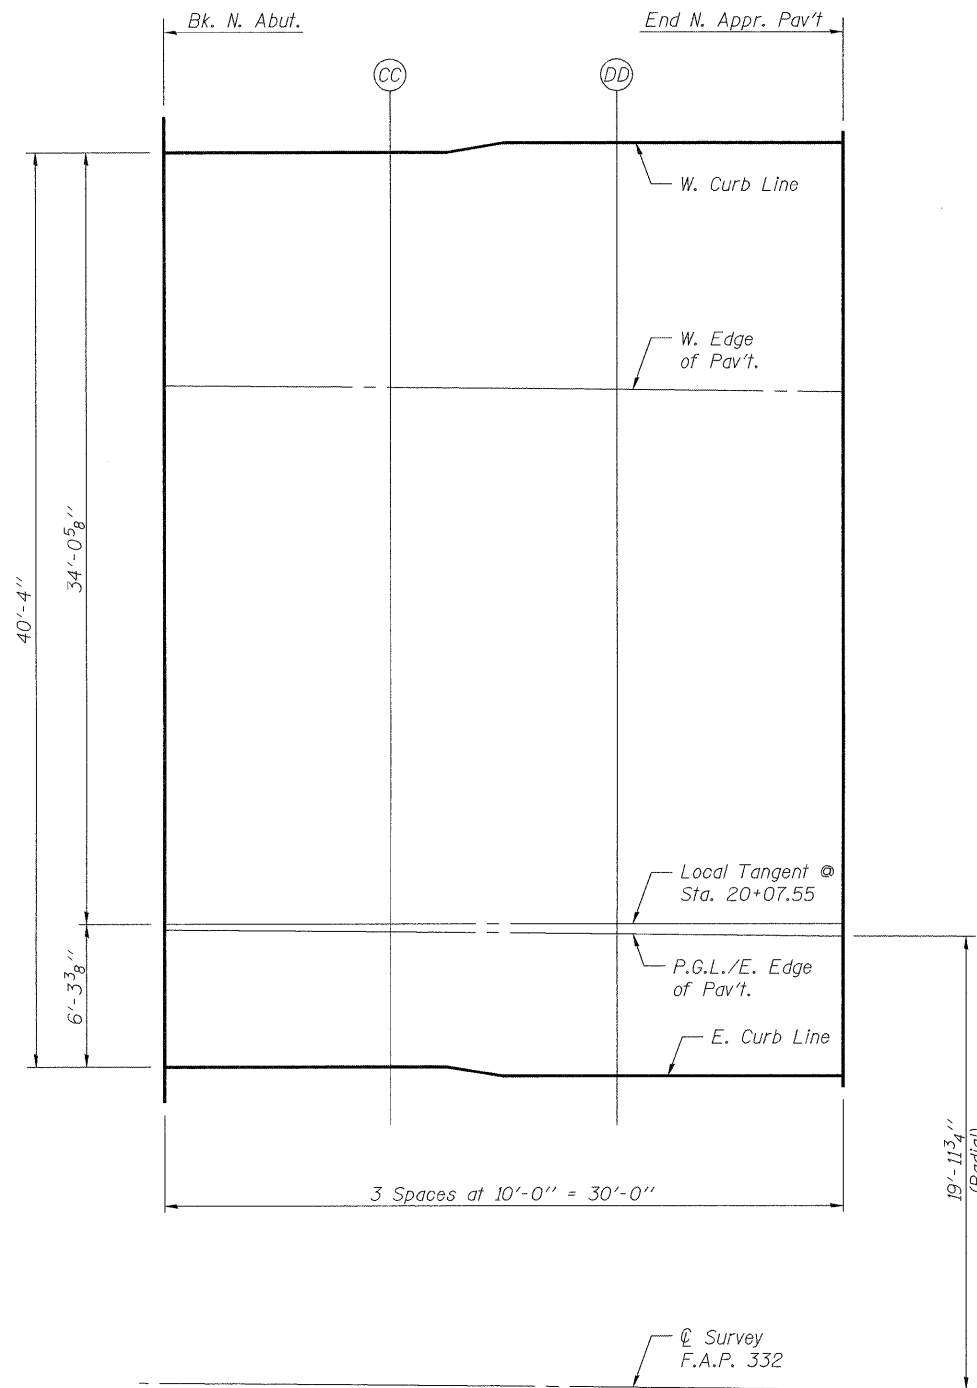

PLAN

DESIGNED	SK/GMK/LCM
CHECKED	GBC/GMK/SMK
DRAWN	RR/LCM/SK
CHECKED	GBC/GMK/SMK

Note:
The stations provided in these tables are measured along the Survey F.A.P. 332.
The offsets provided in these tables are measured from the Southbound Profile Grade Line.

TOP OF NORTH APPROACH SLAB ELEVATIONS
SOUTHBOUND ILLINOIS ROUTE 394 OVER PLUM CREEK
STATION 20+07.55

SHEET NO. 7	F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	332	2002-113R	WILL	242	178
23 SHEETS	SN-099-0183		CONTRACT NO. 62542		
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT					