


SUMMARY OF QUANTITIES					
S.I.	CODE NO.	PAY ITEM	UNIT	QUAN	SFTY-1B
	20200100	EARTH EXCAVATION	CU YD	306	306
	21101625	TOPSOIL FURNISH AND PLACE, 6"	SQ YD	837	837
	25200650	SODDING, SALT TOLERANT (SPECIAL)	SQ YD	837	837
	28000300	TEMPORARY DITCH CHECKS	EACH	1	1
	31101200	SUB-BASE GRANULAR MATERIAL, TYPE B 4"	SQ YD	379	379
	42001300	PROTECTIVE COAT	SQ YD	379	379
	42400200	PORTLAND CEMENT CONCRETE SIDEWALK 5 INCH	SQ FT	3408	3408
	42400800	DETECTABLE WARNINGS	SQ FT	16	16
	44000500	COMBINATION CURB AND GUTTER REMOVAL	FOOT	20	20
	60236200	INLETS, TYPE A, TYPE B GRATE	EACH	1	1
	60603800	COMBINATION CONCRETE CURB AND GUTTER, TYPE B-6.12	FOOT	20	20
	67100100	MOBILIZATION	L SUM	1	1
	70102620	TRAFFIC CONTROL AND PROTECTION, STANDARD 701501	L SUM	1	1
*	78000400	THERMOPLASTIC PAVEMENT MARKING - LINE 6"	FOOT	229	229
	XX003503	FLARED END SECTION REMOVAL	EACH	1	1

\* - INDICATES SPECIALTY ITEMS

**GENERAL NOTES**

1. ANY REFERENCE TO STANDARDS THROUGHOUT THE PLANS OR SPECIAL PROVISIONS SHALL BE INTERPRETED TO BE THE LATEST STANDARDS OF THE ILLINOIS DEPARTMENT OF TRANSPORTATION.
2. ITEMS OF WORK LISTED IN THE SUMMARY OF QUANTITIES WHICH ARE NOT SPECIFICALLY INDICATED IN THE PLANS SHALL BE PERFORMED AT LOCATIONS AS DIRECTED BY THE ENGINEER.
3. WHEN, IN THE CONSTRUCTION OPERATION, ANY LOOSE MATERIAL IS DEPOSITED IN THE FLOW LINE OF DITCHES, GUTTERS OR OTHER DRAINAGE STRUCTURES SO THAT THE NATURAL FLOW OF WATER IS OBSTRUCTED, IT SHALL BE REMOVED AT THE CLOSE OF EACH DAY BY THE CONTRACTOR AT HIS EXPENSE. AT THE CONCLUSION OF THE CONSTRUCTION OPERATIONS, ALL DRAINAGE STRUCTURES SHALL BE FREE FROM ALL DIRT AND DEBRIS. THIS WORK SHALL NOT BE PAID FOR SEPARATELY BUT SHALL BE CONSIDERED INCIDENTAL TO THE CONTRACT.
4. THE APPROXIMATE LOCATION OF KNOWN PUBLIC UTILITIES ARE SHOWN ON THE PLANS. HOWEVER, THE DEPARTMENT DOES NOT GUARANTEE ITS ACCURACY. PRIOR TO COMMENCING OPERATIONS ON THE PROJECT WHICH MAY IN ANY WAY CREATE THE POSSIBILITY OF INVOLVEMENT WITH EXISTING UTILITIES, THE CONTRACTOR SHALL CONTACT THE UTILITY COMPANY INVOLVED. ADJUSTMENT OF ALL PUBLIC UTILITIES WITHIN THE LIMITS OF THIS IMPROVEMENT WILL BE DONE BY THE RESPECTIVE OWNERS. NO ADDITIONAL COMPENSATION WILL BE ALLOWED DUE TO DELAYS OR INCONVENIENCE CAUSED BY THESE ADJUSTMENTS. IT SHALL BE THE CONTRACTOR'S RESPONSIBILITY TO VERIFY LOCATIONS OF UNDERGROUND INSTALLATION BEFORE STARTING CONSTRUCTION OPERATIONS.
5. BEFORE STARTING ANY EXCAVATION, THE CONTRACTOR SHALL CALL "JULIE" AT 800-892-0123 FOR FIELD LOCATIONS OF BURIED ELECTRIC, TELEPHONE AND GAS FACILITIES. (48 HOURS NOTIFICATION IS REQUIRED).
6. THE CONTRACTOR SHALL CONTACT ROBINSON ENGINEERING (708) 331-6700, AND THE VILLAGE OF PEOTONE (708) 258-3279 A MINIMUM OF 72 HOURS IN ADVANCE OF BEGINNING WORK.
7. ALL PAVEMENT, CURB AND SIDEWALK REMOVALS SHALL BE MADE BY MEANS OF STRAIGHT SAW CUT JOINT. THE COST FOR SAW CUTTING SHALL BE INCIDENTAL TO THE CONTRACT.
8. CONTRACTOR SHALL BE RESPONSIBLE AT ALL TIMES FOR TRAFFIC CONTROL AND PROTECTION IN ACCORDANCE WITH THE IDOT STANDARD SPECIFICATIONS ADOPTED JANUARY 1, 2007, THE LATEST EDITION OF THE ILLINOIS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES FOR STREETS AND HIGHWAYS, AND THE STANDARD SPECIFICATIONS FOR TRAFFIC CONTROL ITEMS.

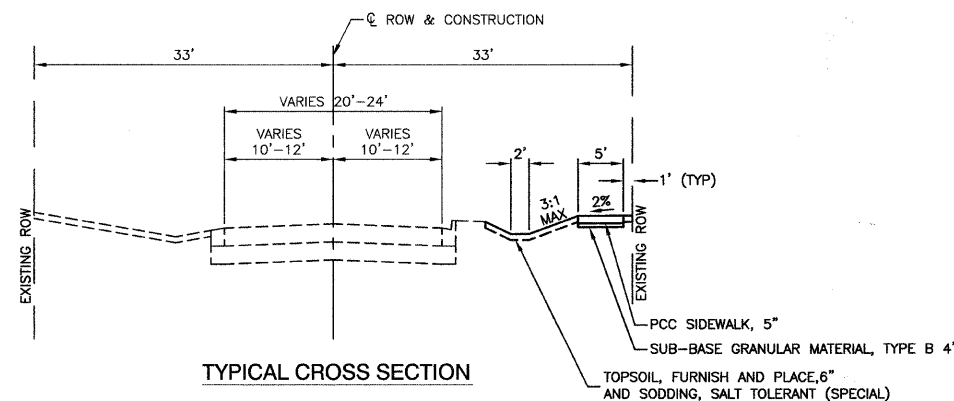

FILE NAME = 08322-QUAN-01 - P01	USER NAME =	DESIGNED - CMK	REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>SUMMARY OF QUANTITIES, GENERAL NOTES AND TYPICAL CROSS SECTION</b>	F.A.U. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
	CHECKED - CMK	REVISED -	4304			08-00046-00-SW-	WILL	7	2	
PLOT SCALE =	DRAWN - AG	REVISED -	CONTRACT NO. 63260							
PLOT DATE = 08-06-09	CHECKED - AG	REVISED -	SCALE: NA			SHEET NO. 2 OF 7 SHEETS	STA. TO STA.	FED. ROAD DIST. NO. 1 ILLINOIS	FED. AID PROJECT ARA-9003(362)	