

PROJECT ENGINEER: REBECCA MARRUFFO

SQUAD LEADER: KEVIN HENSON (815)-284-5971

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
74	37-(4HB,4HB-1,4HB-2)D	HENRY	148	1
FED. ROAD DIST. NO.		ILLINOIS	CONTRACT NO. 64264	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
**PROPOSED
HIGHWAY PLANS**

FAI ROUTE 74 (I-74)
SECTION 37-(4HB,4HB-1,4HB-2)D
PROJECT ESP-074-2(127) 031
HENRY COUNTY

C-92-054-09


R.1E.

INDEX

- 1 COVER SHEET
- 2 - 4 SUMMARY OF QUANTITIES
- 5 - 6 GENERAL NOTES
- 7 - 9 TYPICAL SECTIONS
- 10 - 14 SCHEDULE OF QUANTITIES
- 15 BITUMINOUS/EARTHWORK AND SEEDING SCHEDULES
- 16 - 18 HORIZONTAL AND VERTICAL CONTROL
- 19 - 20 PLAN AND PROFILE
- 21 - 36 STAGING PLANS
- 37 - 66 STRUCTURAL PLANS (SN 037-0015 S.B. & 037-0016 N.B.)
- 67 - 93 STRUCTURAL PLANS (SN 037-0017 S.B.)
- 94 - 120 STRUCTURAL PLANS (SN 037-0018 N.B.)
- 121 - 136 EXISTING BRIDGE PLANS (FOR REFERENCE ONLY)
- 137 SUBBASE THICKNESS TRANSITION DETAIL
- 138 - 140 TRAFFIC BARRIER TERMINAL, TYPE 6 (SPECIAL) DETAIL
- 141 DELINEATOR AND POST (37.4)
ROAD CLOSED TO OVERSIZED LOADS (40.4)
EROSION CONTROL DETAILS FOR SILT FENCE (29.2)
- 142 INFORMATIONAL WARNING SIGN (FOR NARROW TRAVEL LANES) (39.2)
WITNESS MARKER & PERMANENT SURVEY MARKERS, TYPE II (66.2)
- 143 STORM WATER POLLUTION PREVENTION PLAN EROSION CONTROL PLAN (2.1)
- 144 - 148 CROSS SECTIONS

STATE STANDARDS

- 280001-04 TEMPORARY EROSION CONTROL SYSTEMS
- 420001-07 PAVEMENT JOINTS
- 420401-07 BRIDGE APPROACH PAVEMENT CONNECTOR
- 442001-04 CLASS A PATCHES
- 442201-03 CLASS C AND D PATCHES
- 515001-03 NAME PLATE FOR BRIDGES
- 542401-01 METAL END SECTION FOR PIPE CULVERTS
- 542406-01 METAL END SECTION FOR PIPE ARCHES
- 601101-01 CONCRETE HEADWALL FOR PIPE DRAIN
- 609001-04 BRIDGE APPROACH SHOULDER PAVEMENT AND DRAIN
- 630001-08 STEEL PLATE BEAM GUARDRAIL
- 630301-05 SHOULDER WIDENING FOR TYPE 1 (SPECIAL) GUARDRAIL TERMINALS
- 631031-07 TRAFFIC BARRIER TERMINAL, TYPE 6
- 635001-01 DELINEATORS
- 635006-03 REFLECTOR AND TERMINAL MARKER PLACEMENT
- 635011-02 REFLECTOR MARKER AND MOUNTING DETAILS
- 666001-01 RIGHT-OF-WAY MARKERS
- 701006-03 OFF-ROAD OPERATIONS, 2L, 2W, 4.5 M (15') TO 600 MM (24") FROM PAVEMENT EDGE
- 701011-02 OFF-ROAD MOVING OPERATIONS, 2L, 2W, DAY ONLY
- 701201-03 LANE CLOSURE, 2L, 2W, DAY ONLY, FOR SPEEDS > 45 MPH
- 701301-03 LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS
- 701311-03 LANE CLOSURE, 2L, 2W, MOVING OPERATIONS - DAY ONLY
- 701400-03 APPROACH TO LANE CLOSURE, FREEWAY/EXPRESSWAY
- 701402-07 LANE CLOSURE, FREEWAY/EXPRESSWAY, WITH BARRIER
- 701406-05 LANE CLOSURE, FREEWAY/EXPRESSWAY, DAY OPERATIONS ONLY
- 701426-03 LANE CLOSURE, MULTILANE, INTERMITTENT OR MOVING OPERATION, FOR SPEEDS > 45 MPH
- 701901-01 TRAFFIC CONTROL DEVICES
- 704001-05 TEMPORARY CONCRETE BARRIER
- 720011-01 METAL POSTS FOR SIGNS, MARKERS AND DELINEATORS
- 728001-01 TELESCOPING STEEL SIGN SUPPORT
- 729001-01 APPLICATIONS OF TYPES A AND B METAL POSTS (FOR SIGNS & MARKERS)
- 780001-02 TYPICAL PAVEMENT MARKINGS
- 781001-03 TYPICAL APPLICATIONS RAISED REFLECTIVE PAVEMENT MARKERS
- 000001-05 STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
- 001001-02 AREAS OF REINFORCEMENT BARS
- 001006 DECIMAL OF AN INCH AND OF A FOOT
- BLR 21-8 TYPICAL APPLICATION OF TRAFFIC CONTROL DEVICES FOR CONSTRUCTION ON RURAL LOCAL HIGHWAYS
- BLR 23-3 TRAFFIC BARRIER TERMINAL TYPE 1
- BLR 26-1 STEEL PLATE BEAM GUARDRAIL 700 mm (27 1/2") HEIGHT

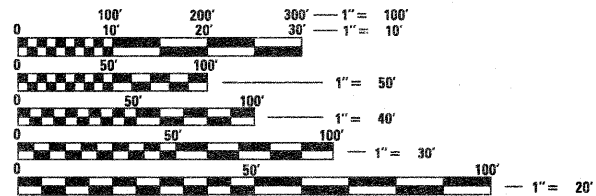

FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811

CONTRACT NO. 64264



R.1E.

LYNN TOWNSHIP, SECTION 25,36
OXFORD TOWNSHIP, SECTION 13,24

GROSS LENGTH OF PROJECT = 24,515.47 LIN. FT. = 4.64 MILES
NET LENGTH OF PROJECT = 364.51 LIN. FT. = 0.07 MILES



IMPROVEMENT BEGINS
STA.1404 + 01.50

SECTION BEGINS
STA. 1421 + 35.68

REMOVAL AND REPLACEMENT
OF THE SUPERSTRUCTURE ON
BRIDGES CARRYING I-74 OVER
OPHIEM RD, 3 MILES SOUTH OF
IL 81 (SN 037-0015 & -0016)
INCLUDING A 1 FT. DROP IN
VERTICAL ALIGNMENT ON OPHIEM
RD. FOR A LENGTH OF 950 FT.

SECTION ENDS
STA. 1423 + 04.18

SECTION BEGINS
STA. 1629 + 27.61

REMOVAL AND REPLACEMENT OF
DECKS ON SN 037-0017 & -0018
OVER TR 379B, 1 MILE NORTH OF
IL 17.

SECTION ENDS
STA. 1631 + 23.62

IMPROVEMENT ENDS
STA. 1649 + 16.97



LOCATION OF SECTION INDICATED THUS: - [shaded area] -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS

SUBMITTED August 6, 2009

George F. Ryan
DEPUTY DIRECTOR OF HIGHWAYS, REGION ENGINEER

October 2, 2009

Charles G. Ingersoll
ENGINEER OF DESIGN AND ENVIRONMENT

October 2, 2009

Christine M. Reed
DIRECTOR OF HIGHWAYS, CHIEF ENGINEER

**PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS**