

8:20:01 AM

8/6/2009

H:\Projects\2945\DCNS\Structural\ACCP\RRUS20 OVER ICR PREFINAL DWGS\010096-6450-013-TOP OF EAST APPROACH SLAB ELEVATIONS.dgn

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
F.A.P. 301	21-VBR 21RS-2	STEPHENSON	112	61
FED. ROAD DIST. NO. 7	ILLINOIS	FED. AID PROJECT		

SHEET NO. 13
32 SHEETS

Contract #64D15

WEST CURB LINE


Location	Station	Offset	Theoretical Grade Elevations
Bk. E. Abut.	57101.333	-22.000	907.696
A	57111.333	-22.000	907.607
B	57121.333	-22.000	907.512
End E. Approach P	57131.333	-22.000	907.411

WEST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
Bk. E. Abut.	57108.335	-12.000	907.843
A	57118.335	-12.000	907.749
B	57128.335	-12.000	907.650
End E. Approach P	57138.335	-12.000	907.545

ROADWAY P.G.

Location	Station	Offset	Theoretical Grade Elevations
Bk. E. Abut.	57116.738	-0.000	907.952
A	57126.738	-0.000	907.854
B	57136.738	-0.000	907.750
End E. Approach P	57146.738	-0.000	907.640

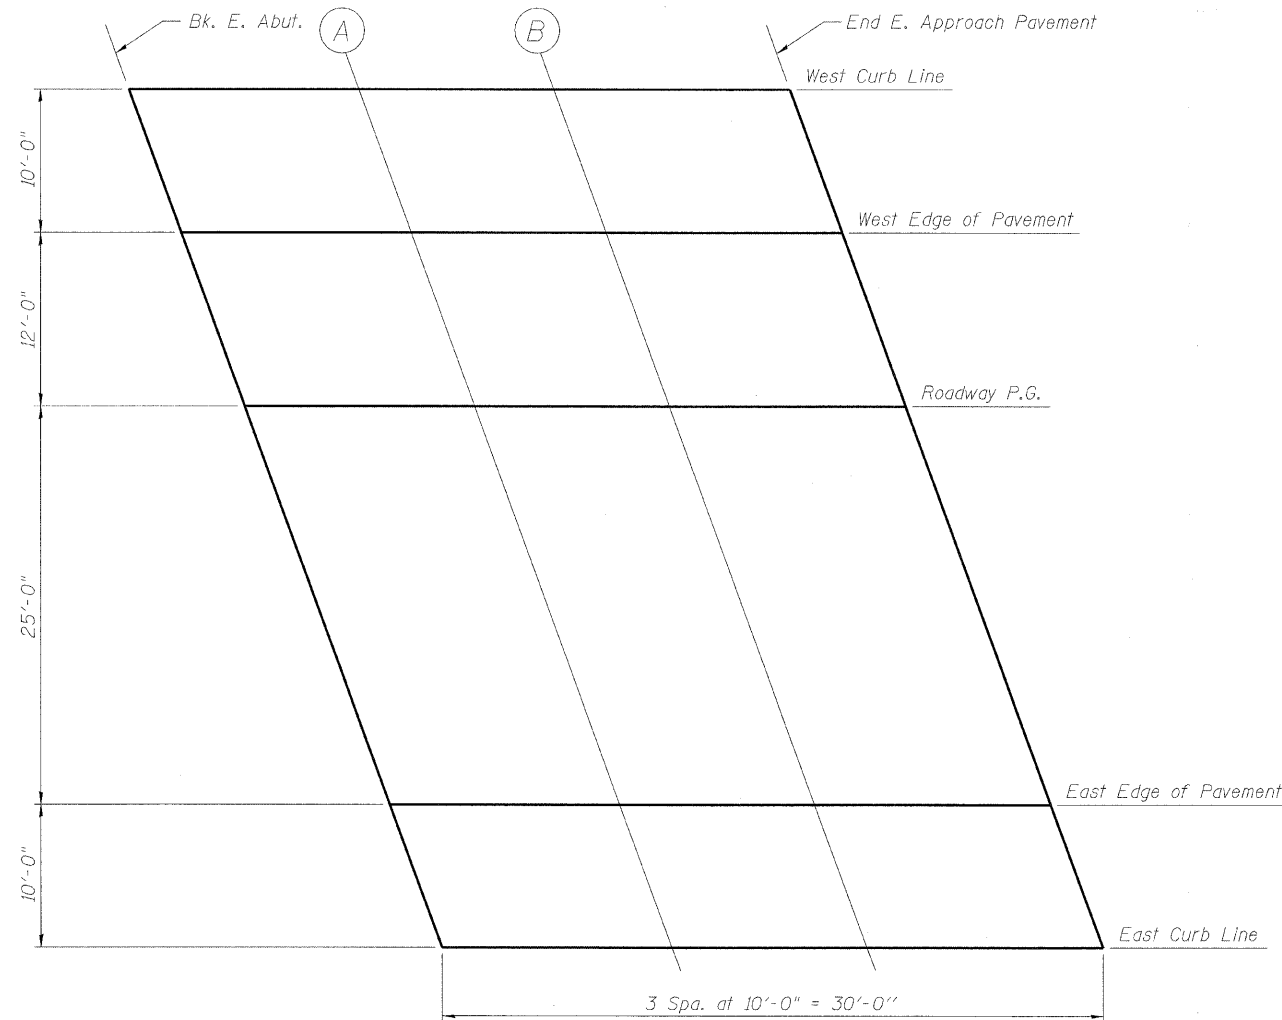

PLAN

EAST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
Bk. E. Abut.	57134.243	24.999	907.386
A	57144.243	24.999	907.278
B	57154.243	24.999	907.163
End E. Approach P	57164.243	24.999	907.044

EAST CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
Bk. E. Abut.	57141.245	35.000	907.102
A	57151.245	35.000	906.990
B	57161.245	35.000	906.872
End E. Approach P	57171.245	35.000	906.748

DESIGNED	MMH
CHECKED	CEN
DRAWN	R.VEJAR
CHECKED	CEN

E-S

5-16-08

TOP OF EAST-APPROACH SLAB ELEVATIONS
US 20 OVER ILLINOIS CENTRAL RAILROAD
F.A.P. RTE. 301 - SEC. 21-VBR & 21RS-2
STEPHENSON COUNTY
STATION 569+56.19
STRUCTURE NO. 089-0077

HOH	HARRY O. HEFTER-ASSOCIATES, INC.	55 East Jackson Blvd.	PROJECT NUMBER
	DESIGN AND CONSULTING ENGINEERS	Suite 800 Chicago, IL 60604	2945