

STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION

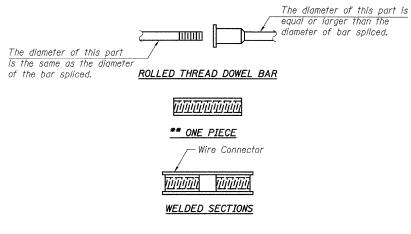


BAR SPLICER ASSEMBLY ALTERNATIVES

**Heavy Hex Nuts conforming to ASTM A 563, Grade C, D or DH may be used.

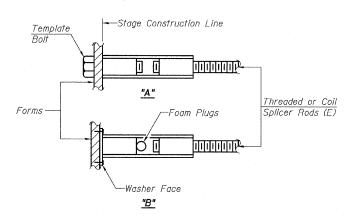



INSTALLATION AND SETTING METHODS


"A": Set bar splicer assembly by means of a template bolt. "B": Set bar splicer assembly by nailing to wood forms or cementing to steel forms. (E): Indicates epoxy coating.

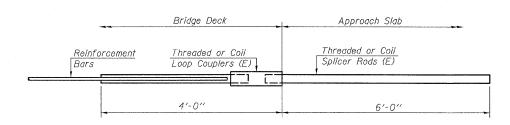

FOR INTEGRAL OR SEMI-INTEGRAL ABUTMENTS





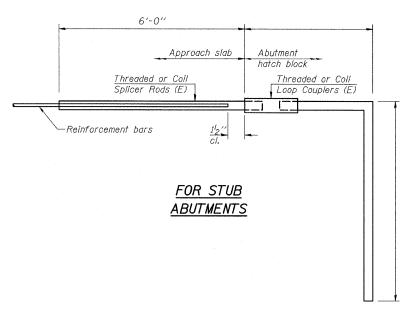

	Bar	Splicer	fo	r #5	bar		
Min.	Capacity	= 23.0	kip	s - i	tensio	n	
Min.	Pull-out	Strength	=	12.3	kips	-	tension
No.	Required	2					

Bar splicer assemblies shall be of an approved type and shall develop in tension at least 125 percent of the yield strength of the lapped reinforcement bars.

Splicer rods shall be of minimum 60 ksi yield strength, threaded or coiled full length. All reinforcement bars shall be lapped and tied to the splicer rods or dowel bars. Bar splicer assemblies shall be epoxy coated according to the requirements for reinforcement bars.


Other systems of similar design may be submitted to the Engineer for approval. Approval shall be based on certified test results from an approved testing laboratory that the proposed bar splicer assembly satisfies the following requirements:

- Minimum Capacity (Tension in kips) = 1.25 x fy x A_t
- (Tension III Kips)
 Minimum *Pull-out Strength = 0.66 x fy x A_t

(Tension in kips)

- Where fy = Yield strength of lapped reinforcement bars in ksi. A_t = Tensile stress area of lapped reinforcement bars. * = 28 day concrete

BAR SPLICER ASSEMBLIES									
		Strength Requirements							
Bar Size to be Spliced	Splicer Rod or Dowel Bar Length		Min. Pull-Out Streng kips - tension						
#4	1'-8''	14.7	7.9						
#5	2'-2"	23.0	12.3						
#6	2'-7"	33.1	17.4						
#7	3′-5′′	45.1	23.8						
#8	4'-6''	58.9	31.3						
#9	5′-9′′	75.0	39.6						
#10	7′-3′′	95.0	50.3						
#11	9′-0′′	117.4	61.8						

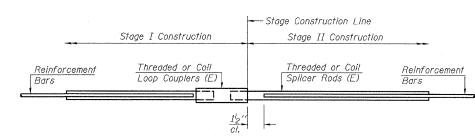

STANDARD

Bar Size	No. Assemblies Required	Location
	, .	
	+	

BAR SPLICER ASSEMBLY DETAILS

STRUCTURE NO. 006-0170 EB STRUCTURE NO. 006-0171 WB

	SHEET NO.52	F.A. RTE.	SECTION					COUNTY	TOTAL SHEETS		SHEET NO.	
		80	*					BUREAU	344		146	
	59 SHEETS								CONTRACT	NO. (66	908
-		FED. RO	DAD	DIST.	NO.	ILLINOIS	FED.	AI	D PROJECT			

TYLININTERNATIONAL