
TYPICAL DETAIL OF RURAL PRIVATE AND COMMERCIAL ENTRANCES

(ENTRANCE WITHOUT EXISTING APRON)

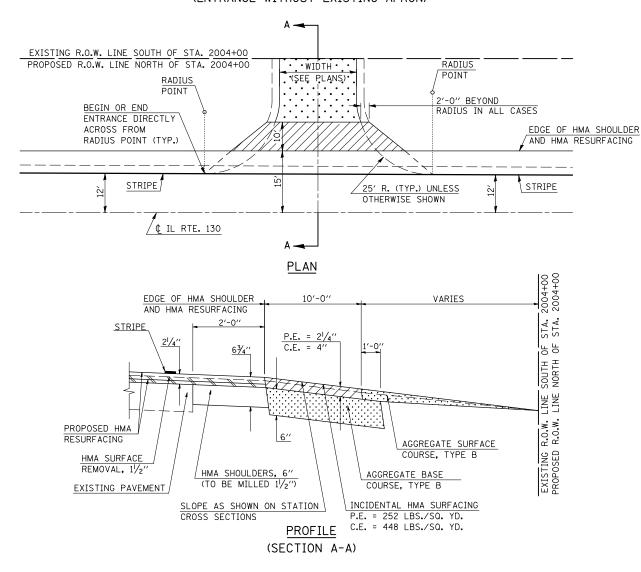

GENERAL NOTES

- 1. THE EXISTING SURFACE SHALL BE PREPARED IN ACCORDANCE WITH SECTION 408 OF THE STANDARD SPECIFICATIONS.
- 2. ANY NECESSARY WORK BEHIND THE HMA SHOULDER OR THE INCIDENTAL HMA SURFACING SHALL BE AS SHOWN IN THE PLANS AND/OR AS DIRECTED BY THE ENGINEER.
- 3. EARTH EXCAVATION REQUIRED FOR THE CONSTRUCTION OF THE AGGREGATE SURFACE COURSE SHALL BE INCLUDED IN THE COST OF AGGREGATE SURFACE COURSE.
- 4. AGGREGATE BASE COURSE, TYPE B, 6" (150)
 MIN. SHALL BE USED WHERE IN THE OPINION OF
 THE ENGINEER THERE IS NOT SUFFICIENT BASE
 MATERIAL FOR THE PROPOSED ENTRANCES. THIS
 MATERIAL SHALL GENERALLY BE USED TO WIDEN
 ANY EXISTING RETURN OR TO CONSTRUCT NEW
 ENTRANCES WHERE NONE NOW EXISTS.

- 5. THE AGGREGATE BASE COURSE SHALL BE CONSTRUCTED 12" WIDER THAN THE SURFACE DIMENSIONS AS SHOWN ABOVE.
- 6. TO ASSURE APPROPRIATE ACCESS POLICIES ARE FOLLOWED ALL NEW ACCESS SHALL BE APPLIED FOR THROUGH THE BUREAU OF OPERATIONS PERMIT APPLICATION PROCESS. PLAN PREPARATION MEMORANDUMS 40-09 AND 40-11 ALONG WITH DISTRICT CONSTRUCTION MEMORANDUM 03/14 DISCUSS THIS PROCEDURE.
- 7. THE ENTRANCE SHOULDER WIDTH SHALL BE 2 FT. THE ENTRANCE SHOULDER SLOPE SHALL BE 4%. THE ENTRANCE SIDE SLOPES SHALL BE 1:4 (FT.).

CONTRACT NO. 70623

A.P.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
808		**	715	305

- * (205,57,105)RS-2
- ** CHAMPAIGN & DOUGLAS