



STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

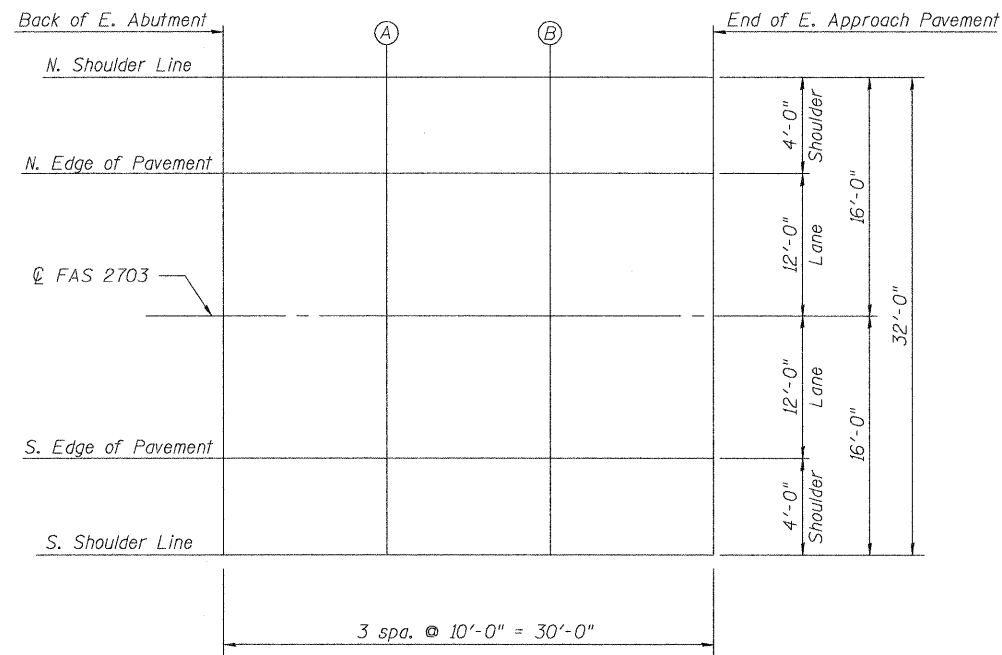

PLAN EAST APPROACH

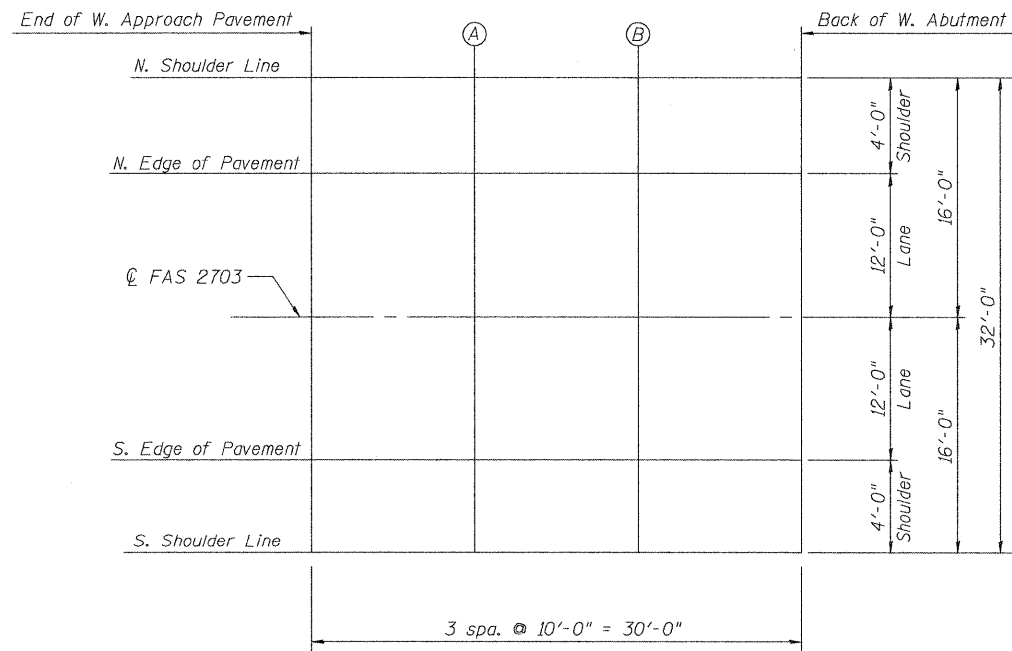

PLAN WEST APPROACH

EAST APPROACH

NORTH EDGE OF SHOULDER

Locations	Station	Offset	Theoretical Grade Elevations
Back of East Abutment	476+32.40	-16.00	570.70
A	476+42.40	-16.00	570.51
B	476+52.40	-16.00	570.34
End of East Approach	476+62.40	-16.00	570.16

NORTH EDGE OF PAVEMENT

Locations	Station	Offset	Theoretical Grade Elevations
Back of East Abutment	476+32.40	-12.00	570.76
A	476+42.40	-12.00	570.60
B	476+52.40	-12.00	570.42
End of East Approach	476+62.40	-12.00	570.24

ROADWAY

Locations	Station	Offset	Theoretical Grade Elevations
Back of East Abutment	476+32.40	0.00	570.95
A	476+42.40	0.00	570.78
B	476+52.40	0.00	570.61
End of East Approach	476+62.40	0.00	570.43

SOUTH EDGE OF SHOULDER

Locations	Station	Offset	Theoretical Grade Elevations
Back of East Abutment	476+32.40	16.00	570.68
A	476+42.40	16.00	570.51
B	476+52.40	16.00	570.34
End of East Approach	476+62.40	16.00	570.16

SOUTH EDGE OF PAVEMENT

Locations	Station	Offset	Theoretical Grade Elevations
Back of East Abutment	476+32.40	12.00	570.76
A	476+42.40	12.00	570.60
B	476+52.40	12.00	570.42
End of East Approach	476+62.40	12.00	570.24

WEST APPROACH

NORTH EDGE OF SHOULDER

Locations	Station	Offset	Theoretical Grade Elevations
End of West Approach	474+38.48	-16.00	572.18
A	474+48.48	-16.00	572.18
B	474+58.48	-16.00	572.17
Back of West Abutment	474+68.48	-16.00	572.16

NORTH EDGE OF PAVEMENT

Locations	Station	Offset	Theoretical Grade Elevations
End of West Approach	474+38.48	-12.00	572.26
A	474+48.48	-12.00	572.27
B	474+58.48	-12.00	572.26
Back of West Abutment	474+68.48	-12.00	572.24

ROADWAY

Locations	Station	Offset	Theoretical Grade Elevations
End of West Approach	474+38.48	0.00	572.45
A	474+48.48	0.00	572.45
B	474+58.48	0.00	572.45
Back of West Abutment	474+68.48	0.00	572.43

SOUTH EDGE OF SHOULDER

Locations	Station	Offset	Theoretical Grade Elevations
End of West Approach	474+38.48	16.00	572.18
A	474+48.48	16.00	572.18
B	474+58.48	16.00	572.17
Back of West Abutment	474+68.48	16.00	572.16

SOUTH EDGE OF PAVEMENT

Locations	Station	Offset	Theoretical Grade Elevations
End of West Approach	474+38.48	12.00	572.26
A	474+48.48	12.00	572.27
B	474+58.48	12.00	572.26
Back of West Abutment	474+68.48	12.00	572.24

**EAST & WEST APPROACH PAVEMENT
TOP OF SLAB ELEVATION
KINMUNDY/LOUISVILLE ROAD
OVER ILLINOIS CENTRAL RR
STA. 475+50.44**

DESIGNED	B.B.
CHECKED	C.J.F.
DRAWN	J.G.
CHECKED	C.J.F. & B.B.



**BERNARDIN
LOCHMUELLER &
ASSOCIATES, INC.**

3 Oak Drive
Maryville, IL 62062-5635
Local (618) 288-4665
Fax 618-288-4666

SHEET NO. 6 22 SHEETS	F.A.S. RTE. 2703	SECTION (9-VBR)B	COUNTY CLAY	TOTAL SHEETS 65	SHEET NO. 28
	SN 013-0044		CONTRACT NO. 74136		
FED. ROAD DIST. NO. 7 ILLINOIS FED. AID PROJECT					