


**ILLINOIS STANDARD**  
**W8-I106**

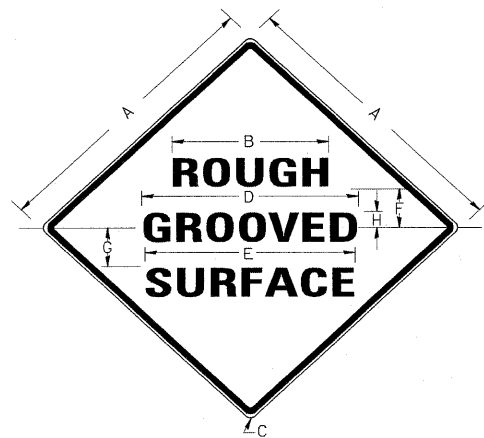

**COLORS:**  
LEGEND AND BORDER BLACK NON-REFLECTORIZED  
BACKGROUND ORANGE REFLECTORIZED

SIGN SIZE	DIMENSIONS							
	A	B	C	D	E	F	G	H
1.2 m x 1.2 m (48x48)	1.2 m (48.0)	603 (24.1)	75 (3.0)	850 (34.0)	825 (33.0)	150 (6.0)	325 (13.0)	88 (3.5)

SIGN SIZE	SERIES LINES			MAR-GIN	BOR-DER	BLANK STD.
	1	2	3			
1.2 m x 1.2 m (48x48)	7C	7C	7C	(0.8)	(1.2)	B4-48D

**NOTE:** PRIOR TO ALLOWING TRAFFIC ON ANY PORTION OF THE ROADWAY THAT HAS BEEN COLDMILLED, THE CONTRACTOR SHALL HAVE ERECTED "ROUGH GROOVED SURFACE" SIGNS THAT CONFORM TO THE ABOVE DETAILS. A MINIMUM OF ONE SIGN AT EACH END OF THE IMPROVEMENT WILL BE REQUIRED. THE CONTRACTOR SHALL MAINTAIN THE "ROUGH GROOVED SURFACE" SIGNS UNTIL THE COLDMILLED SURFACE IS COVERED WITH LEVELING BINDER OR SURFACE COURSE.

IF AT ANY TIME THE SIGNS ARE IN PLACE BUT NOT APPLICABLE, THEY SHALL BE TURNED FROM THE VIEW OF MOTORISTS OR COVERED AS DIRECTED BY THE ENGINEER.

THE COST OF FURNISHING, ERECTING, MAINTAINING, AND REMOVING THE REQUIRED SIGNS SHALL BE INCLUDED IN THE CONTRACT.


**REVISIONS**

REDRAWN	2-15-89
REVISED	4-6-93
REVISED	9-22-93
REVISED	3-11-97

STD. 9M-39

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

**UNEVEN PAVEMENT SIGN**  
**W8-9a-(0)-48**

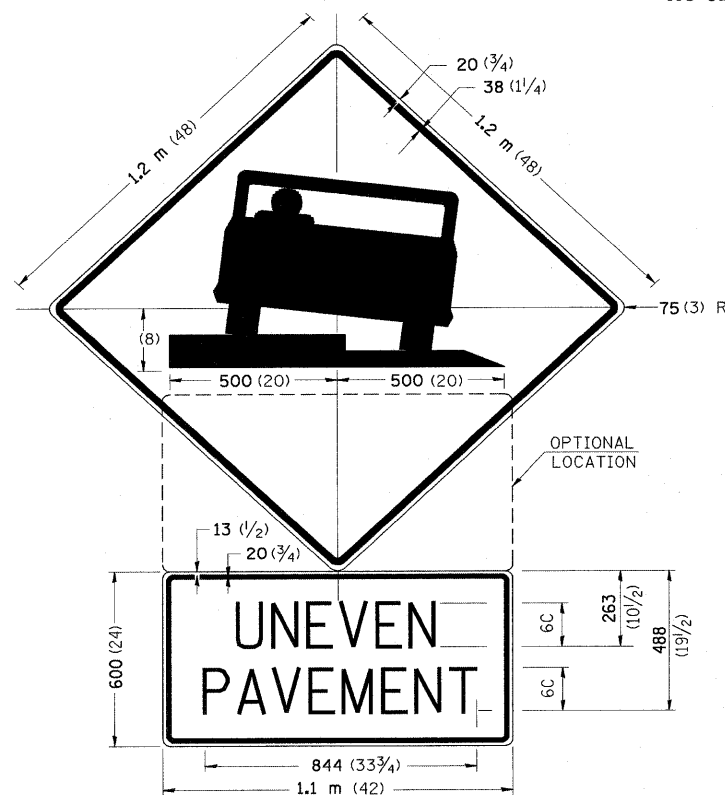

**COLORS:**  
LEGEND AND BORDER - BLACK NON-REFLECTORIZED  
BACKGROUND - ORANGE REFLECTORIZED

**NOTE:** PRIOR TO ALLOWING TRAFFIC ON ANY PORTION OF THE ROADWAY THAT HAS BEEN COLDMILLED OR BEFORE RESURFACING OPERATIONS BEGIN, THE CONTRACTOR SHALL HAVE ERECTED "UNEVEN PAVEMENT" SIGNS THAT CONFORM TO THE ABOVE DETAILS. A MINIMUM OF ONE SIGN AT EACH END OF THE IMPROVEMENT WILL BE REQUIRED. THE CONTRACTOR SHALL MAINTAIN THE "UNEVEN PAVEMENT" SIGNS UNTIL THE RESURFACING OPERATIONS ARE COMPLETED.

IF AT ANY TIME THE SIGNS ARE IN PLACE BUT NOT APPLICABLE, THEY SHALL BE TURNED FROM THE VIEW OF MOTORISTS OR COVERED AS DIRECTED BY THE ENGINEER.

THE COST OF FURNISHING, ERECTING, MAINTAINING, AND REMOVING THE REQUIRED SIGNS SHALL BE INCLUDED IN THE CONTRACT.


**REVISIONS**

DRAWN	2-15-89
REVISED	4-6-93
REVISED	9-23-93
REVISED	3-11-97

STD. 9M-41

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

**CONCRETE MEDIAN TY. SM-6.06 (SPECIAL)**

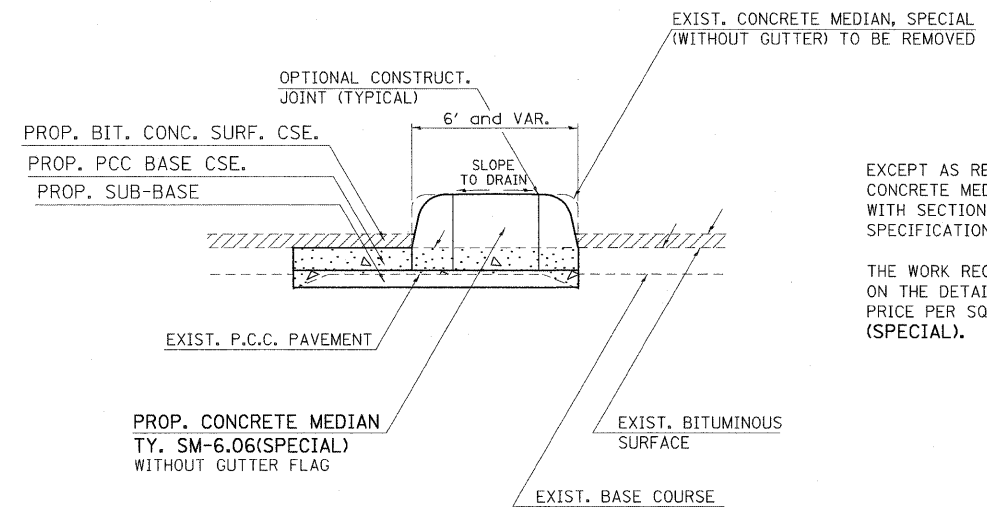

**GENERAL NOTES**

EXCEPT AS REVISED BY THE DETAILS HEREIN, THE PROPOSED CONCRETE MEDIAN SHALL BE CONSTRUCTED IN ACCORDANCE WITH SECTION 606 OF THE STANDARD SPECIFICATIONS,

THE WORK REQUIRED TO RECONSTRUCT THE MEDIAN AS SHOWN ON THE DETAIL SHALL BE PAID FOR AT THE CONTRACT UNIT PRICE PER SQ. FT. FOR CONCRETE MEDIAN TY. SM-6.06 (SPECIAL).

FILE NAME =	USER NAME = naasdp	DESIGNED -	REVISED -
c:\pw\work\pw\dot\naasdp\dms43722\d978872.sht.pln.dgn		DRAWN -	REVISED -
PLOT SCALE = 5.0000 ' / IN.		CHECKED -	REVISED -
PLOT DATE = 1/21/2009		DATE -	REVISED -

**STATE OF ILLINOIS**  
**DEPARTMENT OF TRANSPORTATION**

**DETAILS**

SCALE: SHEET NO. OF SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
885	104RS-5, 13RS-1, 106RS-4	UNION	24	23
CONTRACT NO. 78072				
FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT				