
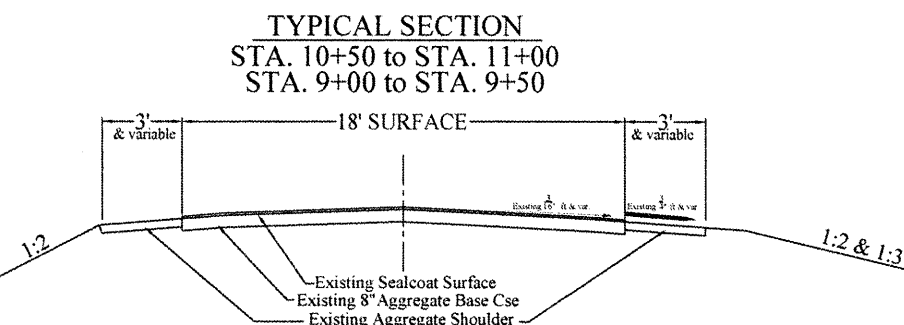
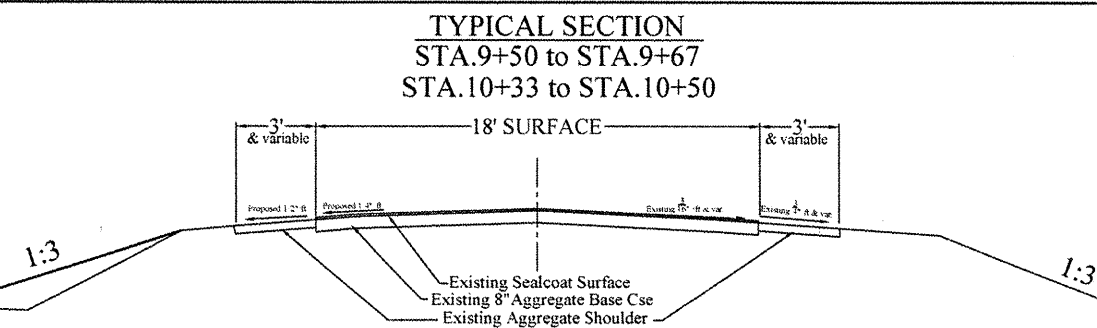
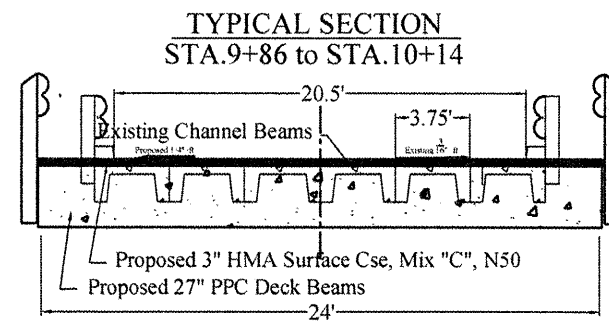


COUNTY	ROUTE	CONTRACT	SHEET
KNOX	TR-251	89544	2 OF 16

SEC.08-04126-00-BR

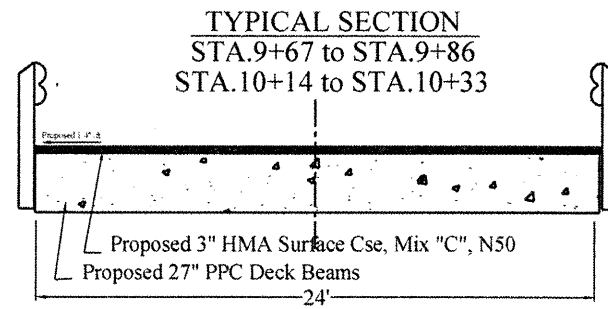

SUMMARY OF QUANTITIES

QUANT.	UNIT	ITEMS	CODE NUMBER
25	POUND	Temporary Erosion Control Seeding	28000250
4	EACH	Temporary Ditch Checks	28000300
209	SQ YD	Stone Dumped Riprap, Class A4	28100707
21	TON	Hot- mix asphalt Surface Course, Mix "C", N50	40603310
1	EACH	Removal of Existing Structures	50100100
20.2	CU YD	Concrete Structures	50300225
1560	SQ FT	Precast Prestressed Concrete Deck Beams (27" Depth)	50400505
2520	POUND	Reinforcement Bars, epoxy coated	50800205
130	FOOT	Steel Railing, Type S1	50900205 *
414	FOOT	Furnishing Metal Shell Piles 12" x 0.250"	51200957
414	FOOT	Driving Piles	51202305
1	EACH	Test Pile Metal shells	51203200
1	EACH	Name Plates	51500100
173	SQ YD	Waterproofing Membrane System	58100200
455	FOOT	Portland Cement Mortar Fairing Course	58300100
1	L.SUM	Mobilization	67100100

* SPECIALTY ITEMS