
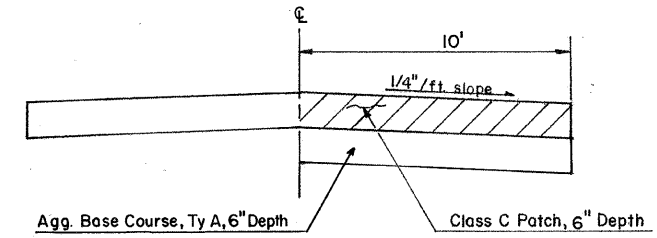
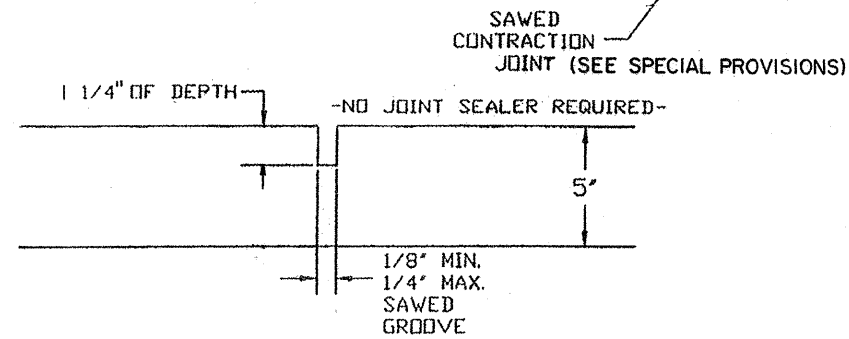



* FAS 713

CONTRACTION / CONSTRUCTION JOINTS

STA 10+00 TO STA 53+68

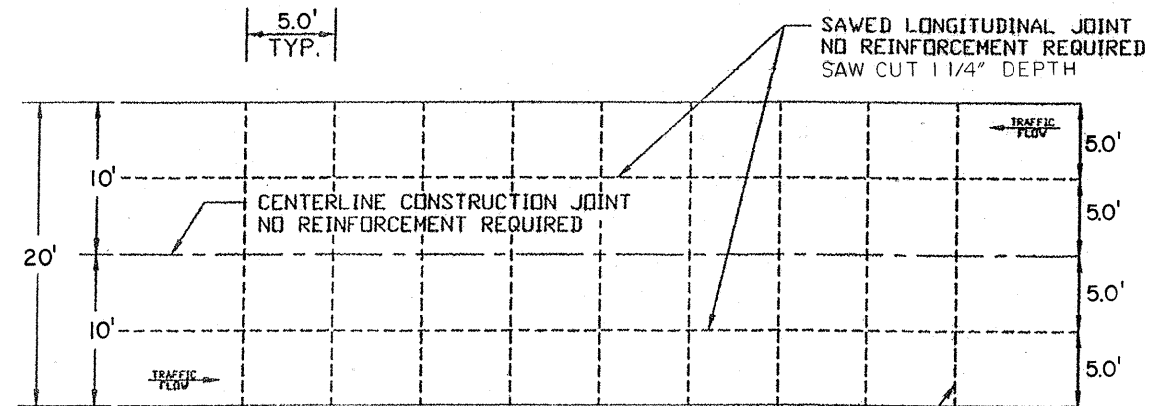

TYPICAL CROSS SECTION

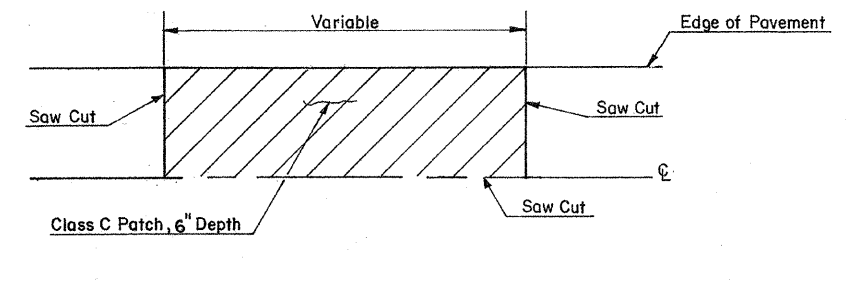

PLAN VIEW

CLASS C PATCH DETAILS

MAINLINE PAVEMENT PATCHING

STATION	OFFSET	CL C PATCHING (SY)		AGG. BASE TY A (TONS)	SAW CUTTING (FEET)
		TY III	TYPE IV		
34+02 - 34+24	RT	24.4		8.6	42
34+75.5 - 35+30.5	RT		61.1	21.4	75
38+48 - 38+73	LT & RT		55.6	19.4	40
42+60 - 43+18	LT		64.4	22.6	78
43+81 - 44+26	LT		50.0	17.5	65
51+94 - 52+78	RT		93.3	32.7	104
TOTAL		24.4	324.4	171.6	404

PAVEMENT PATCHING AT PIPE CULVERTS

STATION	CL C PATCHING (SY)		AGG. BASE TY A (TONS)	SAW CUTTING (FEET)
	TYPE II	TYPE III		
11+05		15.6	5.4	56
14+80	14.4		5.1	40
17+65	11.1		4.0	40
45+38	9.4		3.4	40
TOTAL	34.9	15.6	17.9	176

SHELBY COUNTY
P.C.C. OVERLAY
DETAILS