


STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.	SHEET NO. 8
FAP 308	109BR-5	WHITESIDE	83	42	19 SHEETS
FED. ROAD DIST. NO. 7	ILLINOIS		FED. AID PROJECT		

Contract #64C25

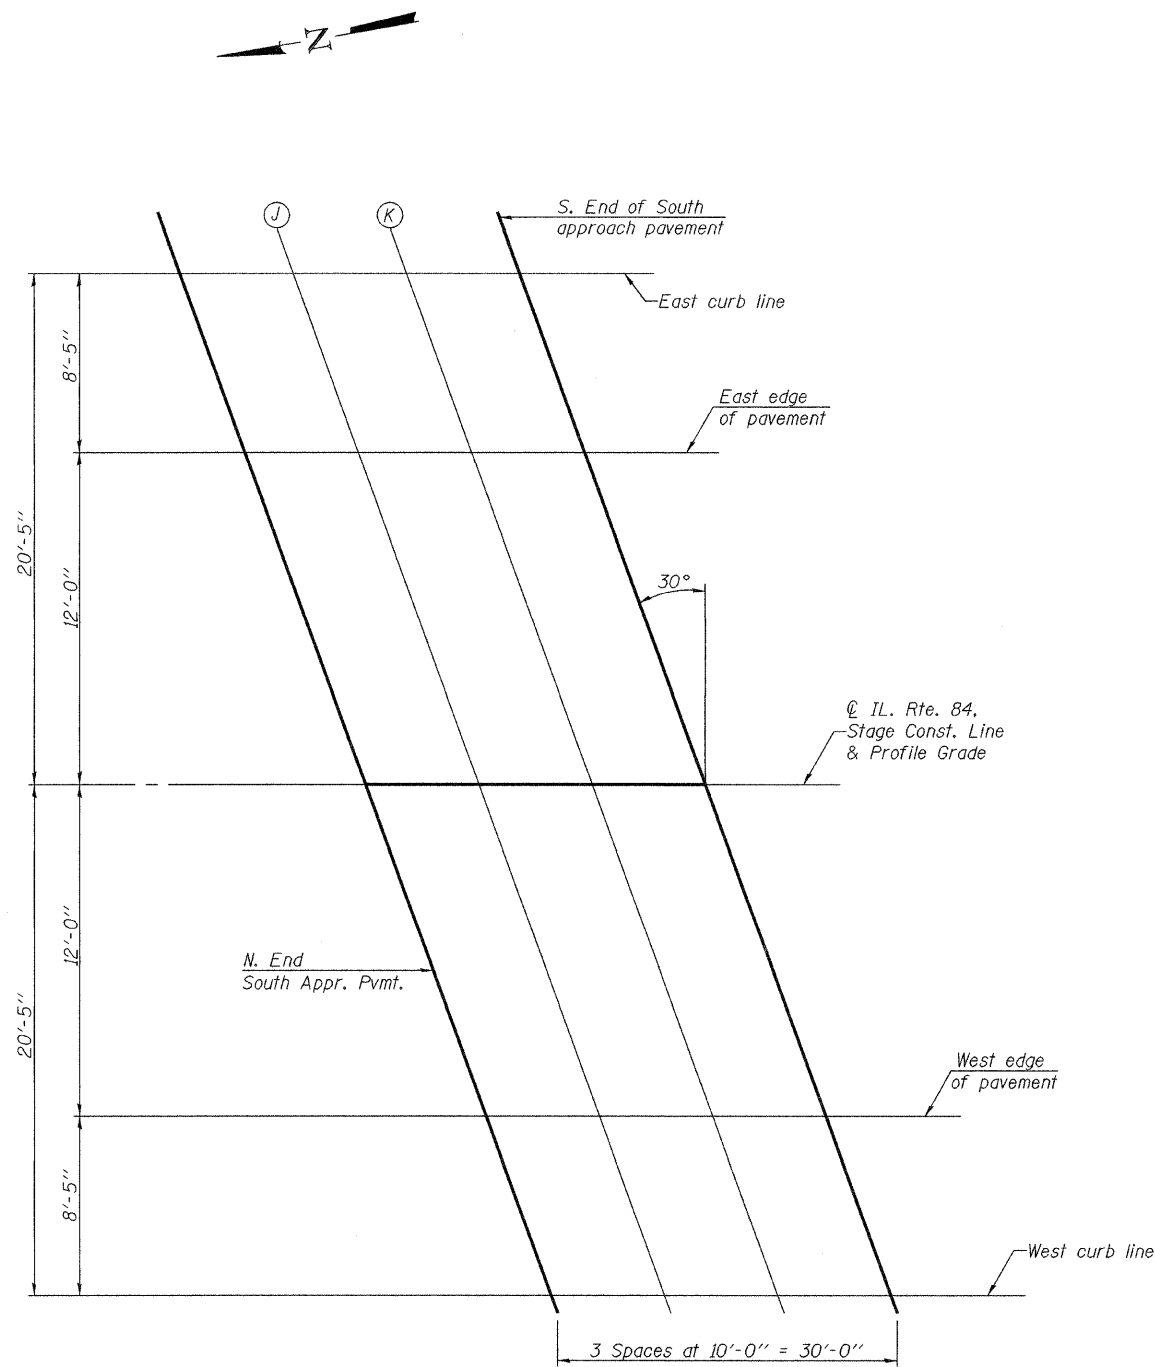

PLAN

EAST CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
N. End S. Appr. Pav't.	345+16.83	-20.42	589.49
J	345+26.83	-20.42	589.44
K	345+36.83	-20.42	589.39
S. End of S. Appr. Pav't.	345+46.83	-20.42	589.34

EAST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
N. End S. Appr. Pav't.	345+21.68	-12.00	589.64
J	345+31.68	-12.00	589.59
K	345+41.68	-12.00	589.54
S. End of S. Appr. Pav't.	345+51.68	-12.00	589.49

☉ ROADWAY, P.G. & STAGE CONSTRUCTION LINE

Location	Station	Offset	Theoretical Grade Elevations
N. End S. Appr. Pav't.	345+28.61	0.00	589.80
J	345+38.61	0.00	589.75
K	345+48.61	0.00	589.70
S. End of S. Appr. Pav't.	345+58.61	0.00	589.65

WEST EDGE OF PAVEMENT

Location	Station	Offset	Theoretical Grade Elevations
N. End S. Appr. Pav't.	345+35.54	12.00	589.57
J	345+45.54	12.00	589.52
K	345+55.54	12.00	589.47
S. End of S. Appr. Pav't.	345+65.54	12.00	589.42

WEST CURB LINE

Location	Station	Offset	Theoretical Grade Elevations
N. End S. Appr. Pav't.	345+40.40	20.42	589.38
J	345+50.40	20.42	589.33
K	345+60.40	20.42	589.28
S. End of S. Appr. Pav't.	345+70.40	20.42	589.23

**SOUTH APPROACH
TOP OF SLAB ELEVATIONS
F.A.P. ROUTE 308 - SECTION 109BR-5
WHITESIDE COUNTY
STATION 344+76.69
STRUCTURE NO. 098-0114**

DESIGNED	Dewey H. Coultas
CHECKED	Stephen M. Ryan
DRAWN	BECKY M. LEACH
CHECKED	DHC/SMR

September 2, 2008
EXAMINED *Thomas J. Demagaleki*
PASSED *Ralph E. Anderson*
ENGINEER OF BRIDGES AND STRUCTURES