

STATE OF ILLINOIS  
DEPARTMENT OF TRANSPORTATION

ROUTE NO.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
F.A.P. 645	*	Marshall	71	24
FED. ROAD DIST. NO. 4		ILLINOIS	FED. AID PROJECT	

SHEET NO. 7  
23 SHEETS

\*(105BR)BR  
Contract - 68479

Operator: dheberling

Date: 8/26/2008

Filename: L:\Jobs\DOT BBS\6956 BBS Various\Various\03\CADD\_Struc\062-0072 4-18-08.dgn

NORTH CURB LINE


LOCATION	STATION	OFFSET	THEORETICAL GRADE ELEVATIONS
End W. Appr. Pav't.	33382.54	-16.00	656.71
A	33392.54	-16.00	656.36
B	33402.54	-16.00	656.02
Bk. of W. Abut.	33412.54	-16.00	655.69

NORTH EDGE OF PAVEMENT

LOCATION	STATION	OFFSET	THEORETICAL GRADE ELEVATIONS
End W. Appr. Pav't.	33384.40	-12.00	656.72
A	33394.40	-12.00	656.38
B	33404.40	-12.00	656.04
Bk. of W. Abut.	33414.40	-12.00	655.71

☉ RDWY., P.G., & STAGE CONSTRUCTION JOINT

LOCATION	STATION	OFFSET	THEORETICAL GRADE ELEVATIONS
End W. Appr. Pav't.	33390.00	0.00	656.72
A	33400.00	0.00	656.38
B	33410.00	0.00	656.04
Bk. of W. Abut.	33420.00	0.00	655.72

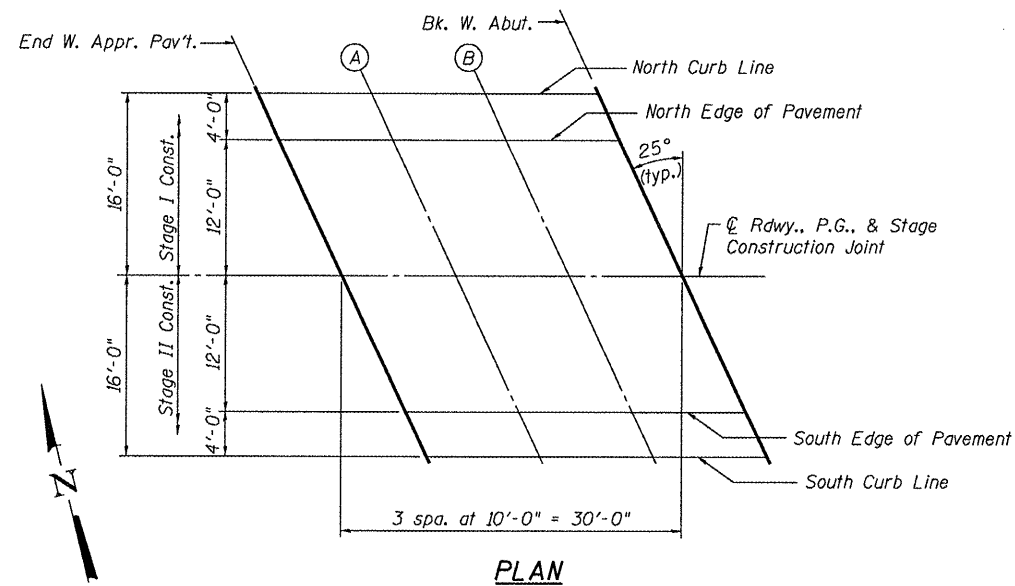

SOUTH EDGE OF PAVEMENT

LOCATION	STATION	OFFSET	THEORETICAL GRADE ELEVATIONS
End W. Appr. Pav't.	33395.60	12.00	656.34
A	33405.60	12.00	656.00
B	33415.60	12.00	655.67
Bk. of W. Abut.	33425.60	12.00	655.35

SOUTH CURB LINE

LOCATION	STATION	OFFSET	THEORETICAL GRADE ELEVATIONS
End W. Appr. Pav't.	33397.46	16.00	656.19
A	33407.46	16.00	655.86
B	33417.46	16.00	655.53
Bk. of W. Abut.	33427.46	16.00	655.21

DESIGNED	CEH
CHECKED	CWC
DRAWN	DLH
CHECKED	CEH / CWC

**WHKS & CO.**  
ENGINEERS PLANNERS LAND SURVEYORS  
MASON CITY, IOWA DUBUQUE, IOWA AMES, IOWA  
E. DUBUQUE, ILLINOIS SPRINGFIELD, ILLINOIS ROCHESTER, MINNESOTA

TOP OF WEST APPROACH  
PAVEMENT ELEVATIONS  
IL ROUTE 17 OVER SENACHWINE CREEK  
FAP ROUTE 645 - SECTION (105BR)BR  
MARSHALL COUNTY  
STATION 334+90.00  
STRUCTURE NO. 062-0072