




MATERIAL TO BE REMOVED AND REPLACED IN THE EMBANKMENT IN ACCORDANCE WITH ART. 205.04 OF THE STANDARD SPECIFICATION. COST TO BE INCLUDED IN THE VARIOUS ITEMS OF EXCAVATION AND NO ADDITIONAL COMPENSATION WILL BE ALLOWED BECAUSE OF THIS WORK.

TYPICAL CROSS SECTION SHOWING STEP CONSTRUCTION ON EXISTING FILL

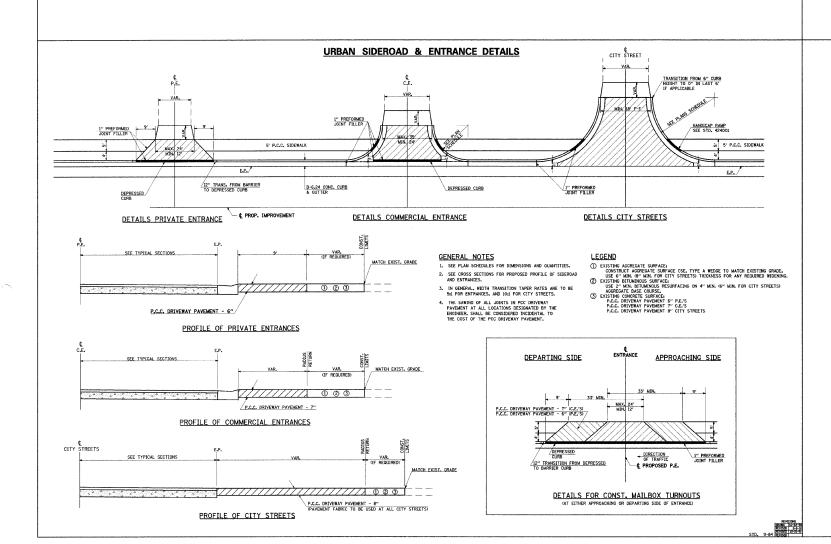

SEEDING & MULCHING



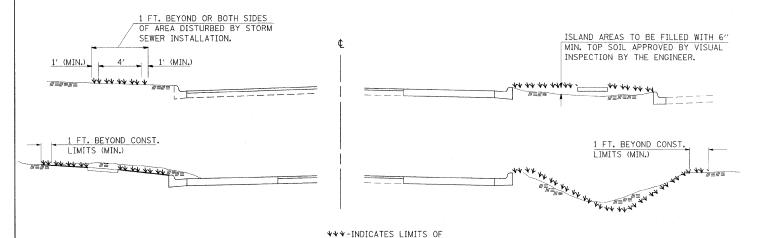

GENERAL NOTES

IN GENERAL, ALL EARTH SURFACES DISTURBED DURING CONSTRUCTION OPERATIONS SHALL BE SEEDED AND MULCHED UPON COMPLETION OF ALL GRADING OPERATIONS.

FERTILIZER NUTRIENTS AND LIMESTONE SHALL BE APPLIED TO ALL SEEDED AREAS.

SEEDING & MULCHING

THE RATES OF APPLICATION OF FERTILIZER, MULCH AND LIME-STONE SHALL BE AS SPECIFIED IN THE SPECIAL PROVISIONS.

SECTIONS 250 AND 251 OF THE STANDARD SPECIFICATIONS SHALL GOVERN THIS WORK EXCEPT AS SPECIFIED HEREIN OR AS NOTED IN THE SPECIAL PROVISIONS.

DRAWN 6-1
REVISED 8-1
REVISED REVISED REVISED

ILLINOIS DEPARTMENT OF TRANSPORTATION

REVISIONS
NAME DATE

FAP ROUTE 331
SECTION 5B-3
JACKSON COUNTY

DRAWN BY: J. NIEDERHOFER

PLOT DATE: *DATE-TIME*

DATE-TIME
DGN-SPEC
*REF-