

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

FOR INDEX OF SHEETS, SEE SHEET NO. 3
FOR SCHEDULE OF QUANTITIES, SEE SHEET NO. 4

PROPOSED HIGHWAY PLANS


VARIOUS ROUTES
SECTION D9 DECK SEAL 2026-1
VARIOUS STRUCTURES
VARIOUS COUNTIES

C-99-108-25

DESIGN DESIGNATION : N/A

COORDINATE SYSTEM : N/A

POSTED SPEED : N/A

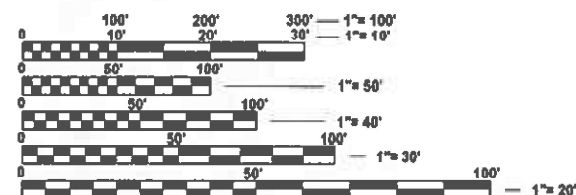


FULL SIZE PLANS HAVE BEEN PREPARED USING STANDARD
ENGINEERING SCALES. REDUCED SIZED PLANS WILL NOT
CONFORM TO STANDARD SCALES. IN MAKING MEASUREMENTS
ON REDUCED PLANS, THE ABOVE SCALES MAY BE USED.

J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123
OR 811


PROJECT ENGINEER EHREN KIRBY
PROJECT DESIGNER THOMAS JEFFERSON

CONTRACT NO. 78B64

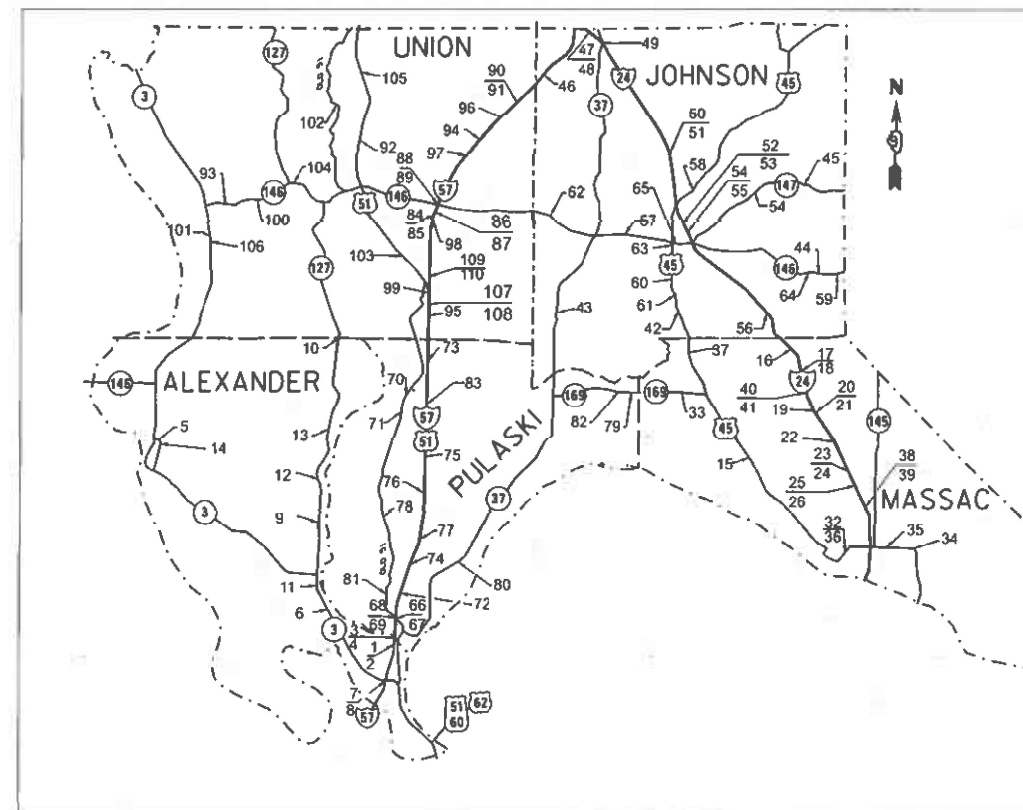

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D9 Deck Seal 2026-1	Various	9	1
		ILLINOIS	CONTRACT NO. 78B64	

D-99-075-25

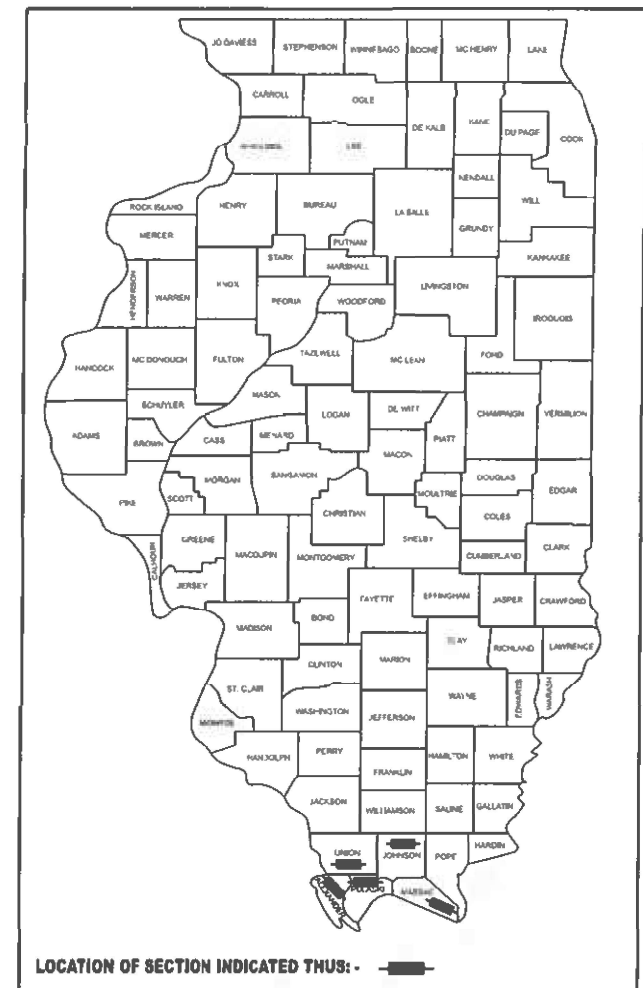

LOCATION OF SECTION INDICATED THUS: - [rectangle] -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SUBMITTED August 6, 2025
Lora S. Renner
REGIONAL ENGINEER

October 3, 2025
[Signature]
ENGINEER OF DESIGN AND ENVIRONMENT

October 3, 2025
[Signature]
DIRECTOR OF HIGHWAYS PROJECT IMPLEMENTATION

PRINTED BY THE AUTHORITY
OF THE STATE OF ILLINOIS

MODEL: 02-Signature Sheet
FILE NAME: C:\paw\work\jefferson\111134\Drawings\SM-Cover_Sign.dgn

USER NAME	= thomas.jefferson	DESIGNED	-	REVISED	-
		DRAWN	-	REVISED	-
		CHECKED	-	REVISED	-
PLOT DATE	= 6/23/2025	DATE	-	REVISED	-

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNATURE SHEET

SCALE: SHEET 2 OF 9 SHEETS STA. TO STA.

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D9 Deck Seal 2026-1	Various	9	2
CONTRACT NO. 78B64				
ILLINOIS FED. AID PROJECT				

Prepared By: Susan Poe
DISTRICT STUDIES & PLANS ENGINEER

Examined By: Nancy Heil HSE
DISTRICT LAND ACQUISITION ENGINEER

Examined By: Car Nulm
DISTRICT PROGRAM DEVELOPMENT ENGINEER

Examined By: [Signature]
DISTRICT OPERATIONS ENGINEER

Examined By: [Signature]
DISTRICT PROJECT IMPLEMENTATION ENGINEER

Examined By: Bennett
DISTRICT CONSTRUCTION ENGINEER

Examined By: Aan Hays
DISTRICT MATERIALS ENGINEER

GENERAL NOTES

All substructure and superstructure units directly under a joint shall be cleaned with high pressure air to remove any debris at the time of cleaning the deck, drains and joints to the satisfaction of the Engineer. Cost of this work included in the cost of Bridge Deck Concrete Sealer.

COMMITMENTS: NONE

INDEX

1	COVER SHEET
2	SIGNATURE SHEET
3	GENERAL NOTES, INDEX OF SHEETS AND STANDARDS
4	SUMMARY OF QUANTITIES
5	ALEXANDER COUNTY SCHEDULE AND PARAPET/ SAFETY WALK CONFIGURATIONS
6	MASSAC COUNTY SCHEDULE
7	JOHNSON COUNTY SCHEDULE
8	PULASKI COUNTY SCHEDULE
9	UNION COUNTY SCHEDULE

STANDARDS

000001-08	STANDARD SYMBOLS, ABBREVIATIONS AND PATTERNS
701001-02	OFF-ROAD OPERATIONS, 2L, 2W, MORE THAN 15' AWAY
701006-05	OFF-ROAD OPERATIONS, 2L, 2W, 15' TO 24" FROM PAVEMENT EDGE
701011-04	OFF-ROAD OPERATIONS, 2L, 2W, DAY ONLY
701101-05	OFF-ROAD OPERATIONS, MULTILANE, 15' TO 24" FROM PAVEMENT EDGE
701106-02	OFF-ROAD OPERATIONS, MULTILANE, MORE THAN 15' AWAY
701201-05	LANE CLOSURE, 2L, 2W, DAY ONLY, FOR SPEEDS ≥ 45 MPH
701400-12	APPROACH TO LANE CLOSURE, FREEWAY/ EXPRESSWAY
701406-13	LANE CLOSURE, FREEWAY/EXPRESSWAY, DAY OPERATIONS ONLY
701411-09	LANE CLOSURE, MULTILANE, AT ENTRANCE OR EXIT RAMP, FOR SPEEDS ≥ 45 MPH
701421-08	LANE CLOSURE, MULTILANE, DAY OPERATIONS ONLY, FOR SPEEDS ≥ 45 MPH TO 55 MPH
701428-01	TRAFFIC CONTROL, SETUP AND REMOVAL, FREEWAY/ EXPRESSWAY
701456-05	PARTIAL EXIT RAMP CLOSURE FREEWAY/EXPRESSWAY
701901-10	TRAFFIC CONTROL DEVICES

REV - MS

MODEL: Index and General Notes [Sheet]
FILE NAME: c:\pwwork\work\td\jeffersons\td111113\1\09\cccc-S\NB-Index_GenNotes.dgn







	USER NAME = thomas.jefferson	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	GENERAL NOTES, INDEX OF SHEETS AND STANDARDS			F.A RTE	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					VAR	D9 Deck Seal 2026-1	Various	9	3
		CHECKED -	REVISED -					CONTRACT NO. 78B64				
	PLOT DATE = 8/5/2025	DATE -	REVISED -		SCALE:	SHEET 3	OF 9 SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT		

SUMMARY OF QUANTITIES

[illegible]

REV - MS

FILE NAME:	USER NAME = thomas.jefferson	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SUMMARY OF QUANTITIES				F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -						VAR	D9 Deck Seal 2026-1	Various	9	4
		CHECKED -	REVISED -						CONTRACT NO. 78B64				
	PLOT DATE = 8/6/2025	DATE -	REVISED -		SCALE:	SHEET 4	OF 9 SHEETS	STA.	TO STA.				
									ILLINOIS FED. AID PROJECT				

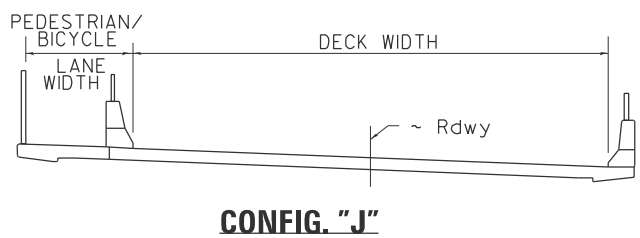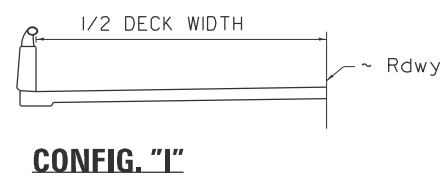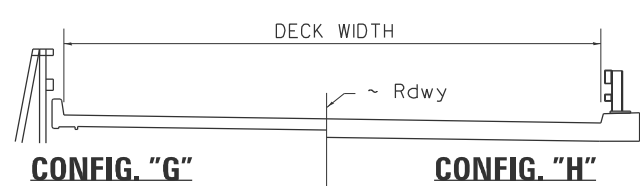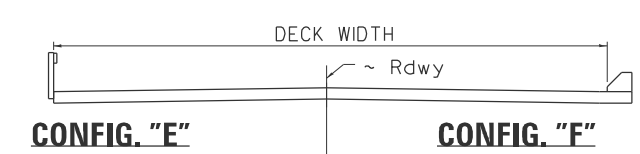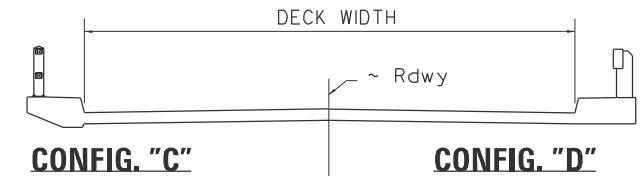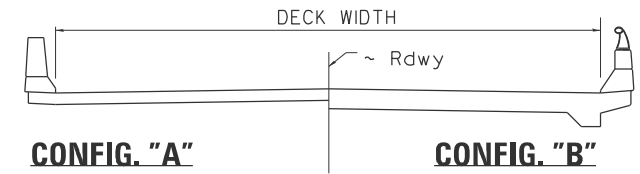

PARAPET/SAFETY WALK
CONFIGURATIONS
(Not To Scale)

BRIDGE DECK SEALING SCHEDULE ALEXANDER COUNTY									
MAP	STRUCTURE NUMBER	ROUTE	FEATURE CROSSED	DECK			SAFETY WALK / PARAPET		TOTAL AREA SQ FT
				LENGTH FT	WIDTH FT	AREA SQ FT	CONFIG.	AREA SQ FT	
1	002-0001	FAI-57 NB	TR-163B	1707.9	35.7	60972	B	11955	72927
2	002-0002	I 57 SB	TR 163B GOLDEN LILLY	1770.0	35.9	63543	B	12390	75933
3	002-0003	I 57 NB	CACHE RIVER	714.0	35.9	25633	B	4998	30631
4	002-0004	I 57 SB	CACIIC RIVER	714.0	35.9	25633	B	4998	30631
5	002-0009	OLD IL RTE 3- GALE RD	SEXTON CREEK	338.0	24.0	8112	G	906	9018
6	002-0014	ILL 3	CACHE RIVER	280.8	35.2	9884	A	2078	11962
7	002-0023	I 57 NB	US 51-CS 6010A-CMTL	3016.7	42.4	127908	B	21117	149025
8	002-0024	I 57 SB	IL 3-CS6010A-CMTL RR	2973.2	42.5	126361	B	20812	147173
9	002-0028	ILL 127	HOGSKIN CREEK	115.0	32.0	3680	E	0	3680
10	002-0029	ILL 127	COOPER CREEK	91.7	33.1	3035	A	679	3714
11	002-0030	ILL 3 - FAP 14	LAKE CR	218.7	35.2	7698	A	1618	9317
12	002-0033	ILL 127	SANDY CREEK	181.5	33.2	6026	A	1343	7369
13	002-0035	ILL 127	JACKSON CREEK	67.3	33.2	2234	A	498	2732
14	002-0037	OLD IL RTE 3	MILLER CREEK	140.7	28.0	3940	E	0	3940
Total									558051

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

ALEXANDER COUNTY SCHEDULE
AND PARAPET/SAFETY WALK CONFIGURATIONS

F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
VAR	D9 Deck Seal 2026-1	Various	9	5
CONTRACT NO. 78B64				
ILLINOIS FED. AID PROJECT				

MODEL: ALEXANDER COUNTY SCHEDULE (Sheet)
FILE NAME: c:\p\work\pilot\jeffersons\sd111113\AD9xxxx-SHE-Schedules.dgn

USER NAME = thomas.jefferson	DESIGNED -	REVISED -
	DRAWN -	REVISED -
	CHECKED -	REVISED -
PLOT DATE = 5/21/2025	DATE -	REVISED -

SCALE: SHEET 5 OF 9 SHEETS STA. TO STA.

MODEL: MASSAC COUNTY SCHEDULE- [Sheet]
FILE NAME: c:\p\work\tdot\jefferson\td111134\p9xxxx-SHE-Schedules.dgn

BRIDGE DECK SEALING SCHEDULE MASSAC COUNTY										
MAP		STRUCTURE NUMBER	ROUTE	FEATURE CROSSED	DECK			SAFETY WALK / PARAPET		TOTAL AREA
					LENGTH	WIDTH	AREA	CONFIG.	AREA	
					FT	FT	SQ FT		SQ FT	SQ FT
15		064-0003	US 45	Q DITCH	119.5	34.4	4111	D	598	4708
16		064-0013	TR 9 RICE HILL RD	INTERSTATE 24	265.1	29.7	7873	B	1856	9729
17		064-0014	I 24 WB	NEW COLUMBIA DITCH	92.3	41.6	3840	B	646	4486
18		064-0015	I 24 EB	NEW COLUMBIA DITCH	92.3	41.7	3849	B	646	4495
19		064-0019	TR 45 BENTON RD	INTERSTATE 24	263.3	29.8	7846	B	1843	9689
20		064-0020	I 24 WB	CNIC RR	179.0	41.6	7446	B	1253	8699
21		064-0021	I 24 EB	CNIC RR	188.1	41.6	7825	B	1317	9142
22		064-0022	FAS 959 ROSEBUD RD	INTERSTATE 24	277.8	31.6	8778	B	1945	10723
23		064-0023	I 24 WB	MASSAC CREEK	156.8	41.7	6539	B	1098	7636
24		064-0024	I 24 EB	MASSAC CREEK	156.8	41.7	6539	B	1098	7636
25		064-0025	I-24 WB	TR 86 MASSAC CR RD	118.5	43.7	5178	B	830	6008
26		064-0026	I 24 EB	TR 86 MASSAC CR RD	118.5	43.7	5178	B	830	6008
32		064-0036	US 45	MASSAC CREEK	290.0	44.0	12760	Λ	2146	14906
33		064-0039	FAS 2937-ILL 169	PATTERSON BRANCH	77.0	35.4	2726	A	570	3296
34		064 0041	US 45	SEVEN MILE CREEK	94.0	39.2	3685	Λ	696	4380
35		064-0042	US 45	FOUR MILE CREEK	123.0	39.2	4822	A	910	5732
36		064-0043	US 45-FAP 889	MASSAC CREEK	290.0	42.7	12383	A	2146	14529
37		064-0044	US 45-FAS 960	MAIN DITCH	152.6	35.3	5387	A	1129	6516
38		064-0045	I-24 EB	COUNTRY CLUB ROAD	139.0	45.2	6283	A	1029	7311
39		064-0046	I-24 WB	COUNTRY CLUB	139.0	45.2	6283	A	1029	7311
40		064-0047	I-24 WB	BEAR CREEK	206.5	44.8	9251	A	1528	10779
41		064-0048	I-24 EB	BEAR CREEK	206.5	44.8	9251	A	1528	10779
Total										174500

	USER NAME = thomas.jefferson	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	MASSAC COUNTY SCHEDULE				F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -						VAR	D9 Deck Seal 2026-1	Various	9	6
		CHECKED -	REVISED -						CONTRACT NO. 78B64				
	PLOT DATE = 7/18/2025	DATE -	REVISED -		SCALE:	SHEET 6	OF 9	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT		

MODEL: JOHNSON COUNTY SCHEDULE (Sheet)
FILE NAME: c:\p_work\pwtol\jefferson\sd111113\1D9xxxx-SHE-Schedules.dgn

BRIDGE DECK SEALING SCHEDULE JOHNSON COUNTY										
MAP		STRUCTURE NUMBER	ROUTE	FEATURE CROSSED	DECK			SAFETY WALK / PARAPET		TOTAL AREA
					LENGTH	WIDTH	AREA	CONFIG.	AREA	
					FT	FT	SQ FT		SQ FT	SQ FT
42		044-0010	US 45	CAVE CREEK	52.9	33.0	1746	E	0	1746
43		044-0012	ILL 37	ABANDONED RR	188.6	35.2	6639	A	1396	8034
44		044-0022	ILL 146	BELL POND CREEK	66.0	33.1	2185	E	0	2185
45		044-0025	ILL 147	CEDAR CREEK	124.4	32.2	4006	F	423	4429
46		044-0028	FAS 1931	INTERSTATE 57	226.5	35.3	7995	A	1676	9672
47		044-0029	I 24 EB	TR 42 & L SALINE R	700.0	41.7	29190	B	4900	34090
48		044-0030	I 24 WB	TR 42 & L SALINE R	700.0	41.6	29120	B	4900	34020
49		044-0031	ILL 37	INTERSTATE 24	328.7	45.7	15022	B	2301	17322
50		044-0037	I 24 EB	TR 77 BOWMAN BOTTOMS	111.0	41.7	4629	B	777	5406
51		044-0038	I 24 WB	TR 77 BOWMAN BOTTOMS	111.0	41.7	4629	B	777	5406
52		044-0043	I 24 WB	TUNNEL HILL STATE TR	159.2	41.7	6639	B	1114	7753
53		044-0044	I 24 EB	TUNNEL HILL STATE TR	159.2	41.9	6670	B	1114	7785
54		044-0045	I 24 WB	LITTLE CACHE CREEK	179.0	42.4	7590	B	1253	8843
55		044-0046	I 24 EB	LITTLE CACHE CREEK	168.3	42.2	7102	B	1178	8280
56		044-0051	TR 140 CENTRAL HILL	INTERSTATE 24	251.7	29.7	7475	B	1762	9237
57		044-0052	ILLINOIS 146	DUTCHMAN CREEK	162.9	45.8	7461	B	1140	8601
58		044-0055	US 45-FAP 881	LITTLE CACHE CREEK	124.7	35.8	4464	A	923	5387
59		044-0056	IL 146-FAP 885	CN/IC RAILROAD	142.8	35.1	5012	A	1057	6069
60		044-0057	US 45	DUTCHMAN CREEK	200.0	35.2	7040	A	1480	8520
61		044-0058	US 45	DUTCHMAN CREEK	185.5	40.7	7550	A	1373	8923
62		044-0059	ILL 146	BUCK RUN CREEK	92.1	38.9	3583	A	682	4264
63		004-0060	US 45	LITTLE CASHE CREEK	104.3	36.0	3755	E	0	3755
64	*	044-0061	IL 146	BAY CREEK	137.3	35.2	6945	A	1016	7961
65		044-0063	IL 146	LITTLE CACHE CREEK	115.0	42.8	7490	A	851	8341
Total										226028
* LENGTH INCLUDES THE 30' APPROACH SLABS										

	USER NAME = thomas.jefferson	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	JOHNSON COUNTY SCHEDULE			F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					VAR	D9 Deck Seal 2026-1	Various	9	7
		CHECKED -	REVISED -					CONTRACT NO. 78B64				
	PLOT DATE = 6/23/2025	DATE -	REVISED -		SCALE:	SHEET 7	OF 9	SHEETS	STA.	TO STA.	ILLINOIS FED. AID PROJECT	

MODEL: PULASKI COUNTY SCHEDULE [Sheet]
FILE NAME: c:\pw_work\pwtd\jefferson\sid111134\p9xxxx-SHE-Schedules.dgn

BRIDGE DECK SEALING SCHEDULE PULASKI COUNTY									
MAP	STRUCTURE NUMBER	ROUTE	FEATURE CROSSED	DECK			SAFETY WALK / PARAPET		TOTAL AREA SQ FT
				LENGTH	WIDTH	AREA	CONFIG.	AREA	
				FT	FT	SQ FT		SQ FT	
66	077-0001	I 57 NB & US 51 NB	FAS 2936 (UNMARKED)	1013.0	35.8	36265	B	7091	43356
67	077-0002	I 57 SB & US 51 SB	FAS 2936 (UNMARKED)	1085.0	35.8	38843	B	7595	46438
68	077-0003	I 57 NB & US 51 NB	CN RR	174.0	41.7	7256	I	870	8126
69	077-0004	I 57 SB & US 51 SB	CN RR	174.0	41.8	7273	I	870	8143
70	077-0015	FAS 2936 (UNMARKED)	INDIAN CAMP CREEK	52.4	33.2	1740	A	388	2127
71	* 077-0016	OLD US 51(UNMARKED)	CACHE RIVER	122.9	32.0	5853	E	0	5853
72	077-0027	FAS 939-CH 8	FAI 57 & US 51	251.7	61.9	15580	B	1762	17342
73	077-0028	FAS 940-CH 5 PERKS	FAI 57 & US 51	203.7	29.7	6050	C	1528	7578
74	077-0031	TR 44 SHUMAKER RD	FAI 57 & US 51	251.5	30.1	7570	B	1761	9331
75	077-0032	TR 60 EASTWOOD RD	FAI 57 & US 51	237.2	29.7	7045	B	1660	8705
76	077-0033	TR 95A PULASKI RD	FAI 57 & US 51	236.0	29.8	7033	B	1652	8685
77	077-0034	TR 107 OLMSTED RD	FAI 57 & US 51	239.5	30.0	7185	B	1677	8862
78	077-0035	FAS 2936 (UNMARKED)	BOAR CREEK DITCH	71.2	32.0	2278	E	0	2278
79	077-0036	ILL 169	TRIB OF POST CREEK	86.0	35.2	3027	A	636	3664
80	077-0037	ILL 37	HODGES BAYOU	176.0	35.2	6195	A	1302	7498
81	077-0038	FAS 2936 (UNMARKED)	TRIB TO HESS BAYOU	70.3	36.5	2566	A	520	3086
82	077-0039	FAS 2937-IL 169	POST CREEK CUTOFF	179.0	32.0	5728	A	1325	7053
83	077-0041	SHAWNEE COLLEGE ROAD	I-57	196.9	33.2	6537	A	1457	7994
Total									206118
* LENGTH INCLUDES THE 30' APPROACH SLABS									

	USER NAME = thomas.jefferson	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	PULASKI COUNTY SCHEDULE			F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					VAR	D9 Deck Seal 2026-1	Various	9	8
		CHECKED -	REVISED -		SCALE: SHEET 8 OF 9 SHEETS STA. TO STA.			CONTRACT NO. 78B64				
	PLOT DATE = 6/23/2025	DATE -	REVISED -					ILLINOIS FED. AID PROJECT				

MODEL: UNION COUNTY SCHEDULE (Sheet)
FILE NAME: c:\p_work\p\td\jefferson\sd111134\p9xxxx-SHE-Schedules.dgn

BRIDGE DECK SEALING SCHEDULE UNION COUNTY									
MAP	STRUCTURE NUMBER	ROUTE	FEATURE CROSSED	DECK			SAFETY WALK / PARAPET		TOTAL AREA SQ FT
				LENGTH	WIDTH	AREA	CONFIG.	AREA	
				FT	FT	SQ FT		SQ FT	
84	091-0007	I 57 NB	CYPRESS CREEK	209.5	38.7	8108	A	1550	9658
85	091-0008	I 57 SB	CYPRESS CREEK	209.5	38.7	8108	A	1550	9658
86	091-0009	I 57 NB	CH 17 CHRISTIAN CHAP	174.2	38.7	6742	A	1289	8031
87	091-0010	I 57 SB	CH 17 CHRISTIAN CHAP	174.2	38.7	6742	A	1289	8031
88	091-0011	FAI 57 NB EXIT 30	ILL 146	137.0	44.4	6083	A	1014	7097
89	091-0012	FAI 57 SB EXIT 30	ILL 146	137.0	44.4	6083	A	1014	7097
90	091-0017	I 57 NB	TR 276 N LICK CR RD	240.3	36.1	8675	A	1778	10453
91	091-0018	I 57 SB	TR 276 N LICK CR RD	240.3	36.1	8675	A	1778	10453
92	091-0022	US 51	CACHE CREEK	40.7	43.1	1754	A	301	2055
93	091-0026	ILL 146	DRAINAGE DITCH	54.0	40.5	2187	H	221	2408
94	091-0042	CH 20 NEW HOPE RD	INTERSTATE 57	230.6	30.0	6918	C	1730	8648
95	091-0046	TR 287 SWAN POND RD	FAI 57 & US 51	255.0	29.8	7599	C	1913	9512
96	091-0048	FAS 924-CH 4 EXIT 36	INTERSTATE 57	214.3	35.2	7543	A	1586	9129
97	091-0049	TR 141 CRAFT LN	INTERSTATE 57	237.0	30.1	7134	C	1778	8911
98	091-0050	TR 193 FRIENDSHIP SC	INTERSTATE 57	258.0	30.1	7766	C	1935	9701
99	091-0051	US 51 NB	FAI 57 SB	164.4	25.9	4258	A	1217	5475
100	091-0059	ILL 146	DUTCH CREEK	139.0	45.4	6311	E	0	6311
101	091-0069	ILL 3 & ILL 146	RUNNING LAKE DITCH	159.0	39.2	6233	A	1177	7409
102	091-0070	FAS 1911-OLD US 51	ICG RR	149.5	44.9	6713	J	2392	9105
103	091-0071	NEW US 51	LITTLE CREEK	164.6	39.1	6436	A	1218	7654
104	091-0072	FAP 885-IL 127/146	GREEN CREEK	118.6	43.3	5135	A	878	6013
105	091-0073	US 51-FAP 322	DRURY CR-CN&IC RR	312.0	43.7	13634	A	2309	15943
106	091-0074	ILL 3 & ILL 146	DRAINAGE DITCH	75.0	43.4	3255	A	555	3810
107	091-0075	I-57	SHAKE RAG ROAD	127.0	45.2	5740	A	940	6680
108	091-0076	I-57	SHAKE RAG ROAD	127.0	45.2	5740	A	940	6680
109	091-0077	I-57 NB	BIG CREEK	207.3	44.8	9287	I	1037	10324
110	091-0078	I-57 SB	BIG CREEK	179.3	44.8	8033	I	897	8929
Total									215173

	USER NAME = thomas.jefferson	DESIGNED -	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	UNION COUNTY SCHEDULE			F.A. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
		DRAWN -	REVISED -					VAR	D9 Deck Seal 2026-1	Various	9	9
		CHECKED -	REVISED -		SCALE: SHEET 9 OF 9 SHEETS STA. TO STA.			CONTRACT NO. 78B64				
	PLOT DATE = 5/22/2025	DATE -	REVISED -					ILLINOIS FED. AID PROJECT				