


### BILL OF MATERIALS (EAST & WEST ABUTS)

ITEM	UNIT	QUANTITY
STRUCTURAL REPAIR OF CONCRETE ≤ 5"	SQ. FT.	790.0
STRUCTURAL REPAIR OF CONCRETE > 5"	SQ. FT.	8.0
PIPE UNDERDRAINS FOR STRUCTURES 4"	FOOT	152

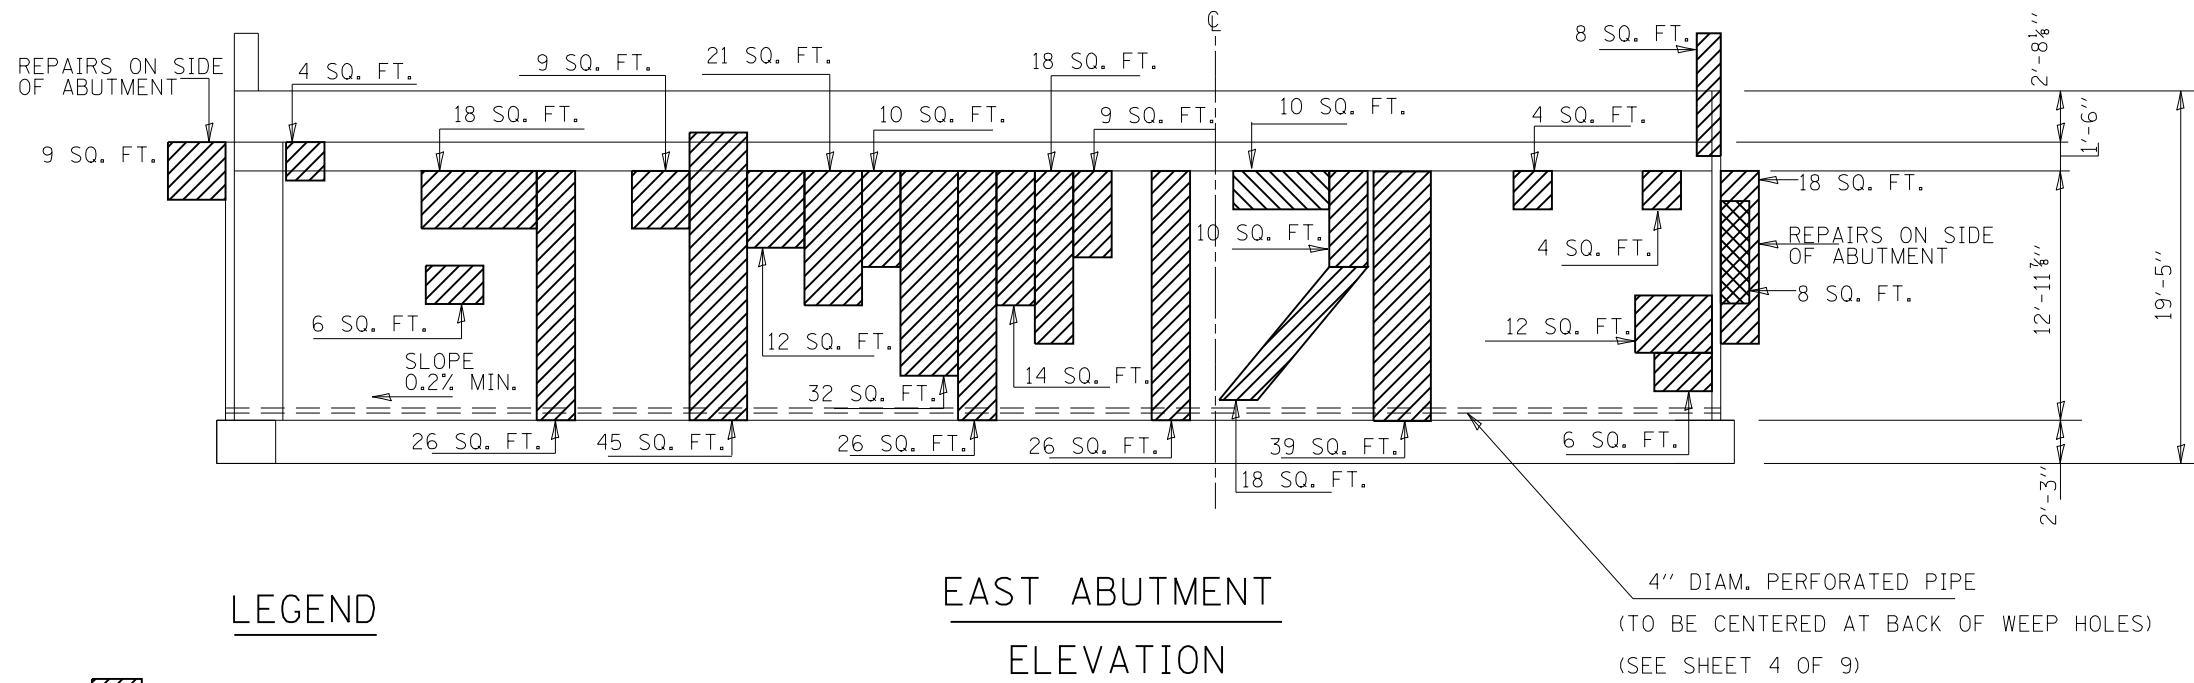

### NOTE:

COMPLETELY DEWATER ABUTMENT VAULTS PRIOR TO PIPE UNDERDRAIN CONSTRUCTION. WATER SHALL BE PUMPED TO LOW POINT. COST INCLUDED WITH "PIPE UNDERDRAINS FOR STRUCTURES 4". "

### LEGEND

- STRUCTURAL REPAIR OF CONCRETE ≤ 5"
- STRUCTURAL REPAIR OF CONCRETE > 5"