


NOTES:

1. ITEMS SHOWN ON THE BILL OF MATERIALS ON THIS SHEET ARE SHOWN FOR INFORMATION ONLY. ALL MATERIALS AND LABOR NECESSARY FOR THE CONSTRUCTION AND REMOVAL OF TEMPORARY LIGHTING ITEMS SHALL BE PAID FOR WITH THE BID ITEM "TEMPORARY LIGHTING SYSTEM".
2. WOOD POLES SHALL BE EMBEDDED 20' BELOW EXISTING GRADE.
3. MULTI-MOUNT LUMINAIRES SHALL BE TILTED 25° OR AS DIRECTED BY THE ENGINEER.
4. TEMPORARY LIGHTING SHALL BE INSTALLED AND OPERATIONAL PRIOR TO REMOVAL OF EXISTING LIGHTS.

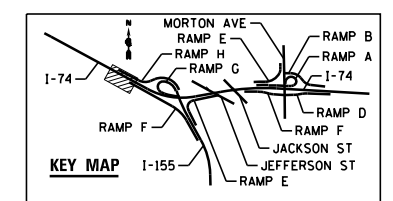

FILE NAME =	DESIGNED - BENESCH	REVISED -	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	TEMPORARY LIGHTING		F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
... \D468620-sh1-1-74-TempStgl2-light04.dgn	DRAWN - NLH	REVISED -		CONSTRUCTION STAGE 12		• 90-[14Rz(14HB-4,14,14HVB)BR]	TAZEWELL	ILLINOIS	2433	1807
USER NAME = tblank	CHECKED - GHT	REVISED -		SCALE: 1"=50'		SHEET NO. 92 OF 138 SHEETS	STA.	TO STA.	CONTRACT NO. 68620	
PLOT DATE = 9/5/2012	DATE - JULY 20, 2012	REVISED -		PR ROW AND ACCESS CONTROL FENCE				ILLINOIS FED. AID PROJECT		• 74 & 155