


DETAIL OF AGGREGATE DITCH

STONE DUMPED RIPRAP, TYPE A2

STATION TO STATION	LENGTH (FEET)	QTY (SQ YD)
EASTBOUND		
299+51 TO 303+71	420	187
304+18 TO 321+50	1732	770
393+50 TO 396+81	331	147
397+17 TO 400+00	283	126
471+00 TO 486+60	1560	693
487+32 TO 504+50	1718	763
492+00 TO 496+00	400	89
509+70 TO 515+00	530	235
523+00 TO 525+90	290	129
526+10 TO 528+26	216	96
537+50 TO 541+69	419	186
541+93 TO 544+00	207	92
557+10 TO 559+50	240	107
TOTAL =		3620
WESTBOUND		
313+23 TO 325+49	1226	545
394+50 TO 396+91	241	107
397+85 TO 402+46	461	205
471+50 TO 486+85	1535	682
487+40 TO 504+50	1710	760
523+00 TO 525+50	250	111
542+10 TO 543+50	140	669
554+61 TO 556+54	193	86
556+96 TO 559+50	254	113
TOTAL =		3278

DETAIL OF SUBBASE GRANULAR MATERIAL (SPECIAL)

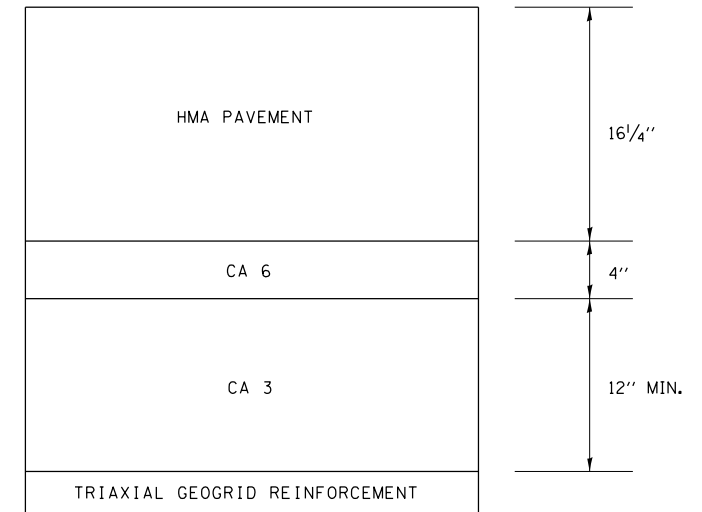

- E. B. STA. 344+62 TO STA. 352+62
- E. B. STA. 430+30 TO STA. 438+30
- E. B. STA. 525+68 TO STA. 533+68
- E. B. STA. 617+42 TO STA. 625+42
- W. B. STA. 346+38 TO STA. 351+38
- W. B. STA. 432+05 TO STA. 437+05
- W. B. STA. 525+94 TO STA. 533+94
- W. B. STA. 617+42 TO STA. 625+42

NOTES:

1. THE FIRST LIFT OF HMA BINDER COURSE SHALL BE PLACED WITHIN 4 DAYS OF THE START OF PAVEMENT REMOVAL OPERATION.

SUBBASE GRANULAR MATERIAL (SPECIAL) SCHEDULE

STATION TO STATION	LENGTH (FEET)	EARTH EXCAVATION (SPECIAL) (CU YD)	TRIAXIAL GEOGRID REINFORCEMENT (SQ YD)	SUBBASE GRANULAR MATERIAL (SPECIAL) (CU YD)
EASTBOUND				
344+62 TO 352+62	800	959.2	2133.3	948.1
430+30 TO 438+30	800	959.2	2133.3	948.1
525+68 TO 533+68	800	959.2	2133.3	948.1
617+42 TO 625+42	800	959.2	2133.3	948.1
EASTBOUND TOTALS		3837	8533.3	3792
WESTBOUND				
346+38 TO 351+38	500	642.6	1333.3	592.6
432+05 TO 437+05	500	642.6	1333.3	592.6
525+94 TO 533+94	800	959.2	2133.3	948.1
617+42 TO 625+42	800	959.2	2133.3	948.1
WESTBOUND TOTALS		3204	6933.3	3081
TOTALS		7041	15467	6874