
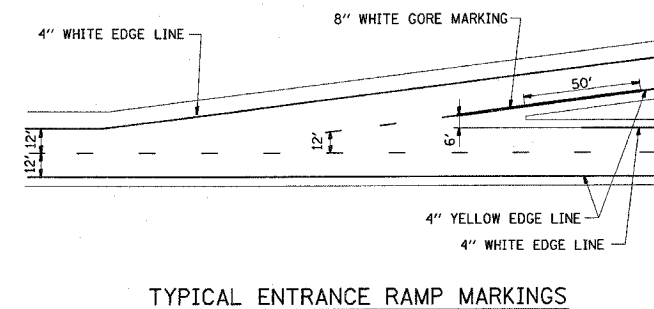


PAVEMENT MARKING SCHEDULE

LOCATION			PREFORMED PLASTIC PAVEMENT MK. TYPE B INLAID	THERMOPLASTIC PAVEMENT MARKING				POLYUREA PAVEMENT MARKING TYPE 1			RAISED REFLECTIVE PAVEMENT MARKER REMOVAL	RAISED REFLECTIVE PAVEMENT MARKER	RAISED REFLECTIVE PAVEMENT MARKER (BRIDGE)		
			4"	4"		8"		4"							
			WHITE SKIP-DASH LANE LINE	SOLID WHITE EDGE LINE	SOLID YELLOW EDGE LINE	WHITE SKIP-DASH	SOLID WHITE	SKIP-DASH	WHITE	YELLOW					
STATION	TO	STATION	FOOT	FOOT	FOOT	FOOT	FOOT	FOOT	FOOT	FOOT	FOOT	EACH	EACH	EACH	
FAI 64 EASTBOUND															
2934+95	TO	2943+00	201	805	805							20	20		
2943+00	TO	2973+00	750	3000	3000							75	75		
2973+00	TO	2981+45	211	845	845							21	21		
2981+45	TO	2983+45						50	200	200		5	5		
2983+45	TO	3002+00	464	1855	1855							46	46		
3002+00	TO	3033+00	775	3100	3100							78	78		
3033+00	TO	3063+00	750	3000	3000							75	75		
3063+00	TO	3093+00	750	3000	3000							75	75		
3093+00	TO	3123+00	750	3000	3000							75	75		
3123+00	TO	3153+00	750	3000	3000							75	75		
3153+00	TO	3183+00	750	3000	3000							75	75		
3183+00	TO	3213+00	750	3000	3000							75	75		
3213+00	TO	3221+35	209	835	835							21	21		
3221+35	TO	3223+35						50	200	200		5	5		
3223+35	TO	3243+00	491	1965	1965							49	49		
3243+00	TO	3262+84	496	1984	1984							50	50		
3262+84	TO	3264+46						41	162	162				4	
3264+46	TO	3273+00	214	854	854							21	21		
3273+00	TO	3282+12	228	912	912							23	23		
3282+12	TO	3284+18						52	206	206				6	
3284+18	TO	3288+18	100	400	400							10	10		
3288+00	TO	3303+00	375	1500	1500							38	38		
3303+00	TO	3333+00	750	3000	3000							75	75		
3333+00	TO	3355+51	563	2251	2251							56	56		
RAMPS															
RAMP 3				1200	1200		720					22	38		
RAMP 4				743	743	60	300								
SUB-TOTALS			10327	43249	43249	60	1020	193	768	768	1065	1081	10		

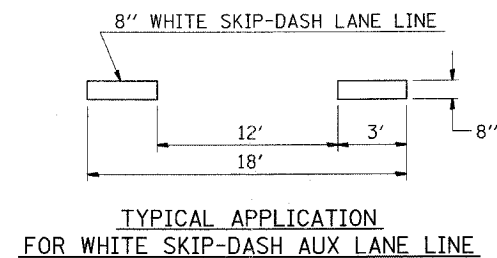

REVISIONS	
NAME	DATE

ILLINOIS DEPARTMENT OF TRANSPORTATION
PAVEMENT MARKING SCHEDULES
 FAI ROUTE 64
 SECTION 95-(5,6)RS-1
 WASHINGTON COUNTY
 DRAWN BY: _____

0/12/2007
 c:\nrc\p1\10\101207\6.dgn
 REF
 REF