SIGN DETAIL

1:75

EB-BM-67
STA. 618+50

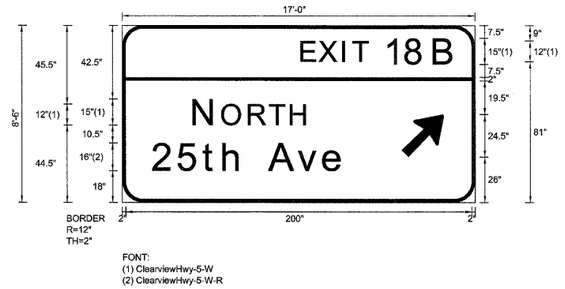

FONT:
(1) ClearviewHwy-5-W
(2) ClearviewHwy-5-W-R

SIGN NUMBER	name
WIDTH x HGHT.	17'-0" x 8'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
ARMED	45	161.5	26	20	31.5

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

									LENGTH	SERIES-SIZE
E	X	I	T	1	8	B				ClearviewHwy-5-W
104.1	114.4	128	134	152.6	164.7	181.1			88.3	12,15
N	O	R	T	H						ClearviewHwy-5-W
41.9	58.2	73.7	85.6	97.8					65.1	15,12
2	5	t	h		A	v	e			ClearviewHwy-5-W-R
18	33	47	58.8	69.9	85.3	101.9	116.6		110.4	1613

FILE NAME =	DESIGNED - SEW	REVISED -	
$FILE1$	DRAWN - SEW	REVISED -	
USER NAME = $USER$	CHECKED - FML	REVISED -	
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -	

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 15 OF 77 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(3031.1, ETC., 3838)RS-5	COOK	413	343
		CONTRACT NO. 60G52		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		