SIGN DETAIL
1:75

EB-BM-85
STA. 808+65

SIGN NUMBER	name	
WIDTH x HGHT.	15'-6" x 8'-6"	
BORDER WIDTH	2"	
CORNER RADIUS	12"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White/White

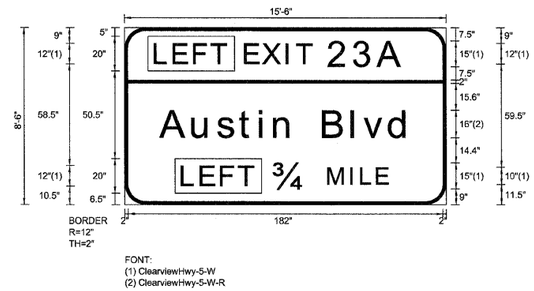

SYMBOL	ROT	X	Y	WID	HT

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																																				LENGTH	SERIES-SIZE
L	E	F	T																																		ClearviewHwy-5-W
18	28.8	40.5	50.6																																	41.2	12
E	X	I	T	2	3	A																															ClearviewHwy-5-W
70.1	80.4	94.1	100	118.6	133	147.1																														91	12,15
A	u	s	t	i	n		B	l	v	d																											ClearviewHwy-5-W-R
21.1	39.6	54.1	66.8	78.4	86.8	97.9	115.1	131.7	138.7	153.4																										143.9	1613
L	E	F	T																																		ClearviewHwy-5-W
33.5	44.4	56.1	66.2																																	41.2	12
3/4	M	I	L	E																																	ClearviewHwy-5-W
86.8	118	131.1	137.1	146.1																																65.7	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILE_$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 29 OF 77 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(3031.1, ETC., 3838)RS-5	COOK	413	357
		CONTRACT NO. 60G52		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		