SIGN DETAIL
1:75

WB-CL-59
STA. 489+90

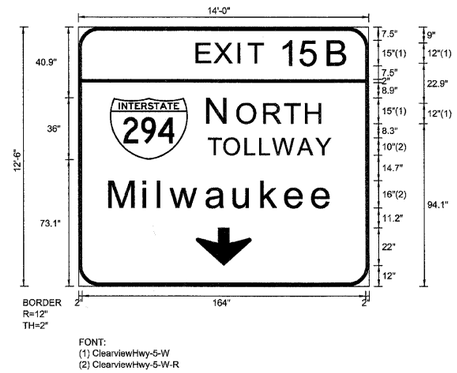

FONT:
(1) ClearviewHwy-5-W
(2) ClearviewHwy-5-W-R

SIGN NUMBER	name
WIDTH x HGHT.	14'-0" x 12'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
M1_1	0	18.3	73.1	45	36
ARDOWN	0	68	12	32	22

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

									LENGTH	SERIES/SIZE
E	X	I	T	1	5	B				ClearviewHwy-5-W
68.9	79.2	92.8	98.8	117.4	129.4	145.1			87.5	12,15
N	O	R	T	H						ClearviewHwy-5-W
75.3	92.5	107.9	119.8	132					65.9	15,12
T	O	L	L	W	A	Y				ClearviewHwy-5-W-R
75.3	84.4	96.7	105.1	112.6	127.1	137.4			70.9	10
M	i	l	w	a	u	k	e	e		ClearviewHwy-5-W-R
18.3	37.8	46.3	53.4	74.3	90.2	106.2	120	135.6	129.1	16/13

FILE NAME =	DESIGNED - SEW	REVISED -	LIN ENGINEERING, LTD. Consulting Engineers Chatham, Illinois Westmont, Illinois	STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION	SIGNING DETAILS	F.A.I. RTE. 290	SECTION (3031.1, ETC., 3838)RS-5	COUNTY COOK	TOTAL SHEETS 413	SHEET NO. 364
$FILEL$	DRAWN - SEW	REVISED -						CONTRACT NO. 60G52		
USER NAME = $USER$	CHECKED - FML	REVISED -			SCALE: N.T.S. SHEET NO. 36 OF 77 SHEETS STA. TO STA.	FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -								