# SIGN DETAIL

1:75

WB-TR-68
STA. 541+20

| SIGN NUMBER | name | |
|---|---|---|
| WIDTH x HGHT. | 14'-6" x 8'-6" | |
| BORDER WIDTH | 2" | |
| CORNER RADIUS | 12" | |
| MOUNTING | Overhead | |
| BACKGROUND | TYPE: | Reflective |
| | COLOR: | Green |
| LEGEND/BORDER | TYPE: | Reflective |
| | COLOR: | White/White |

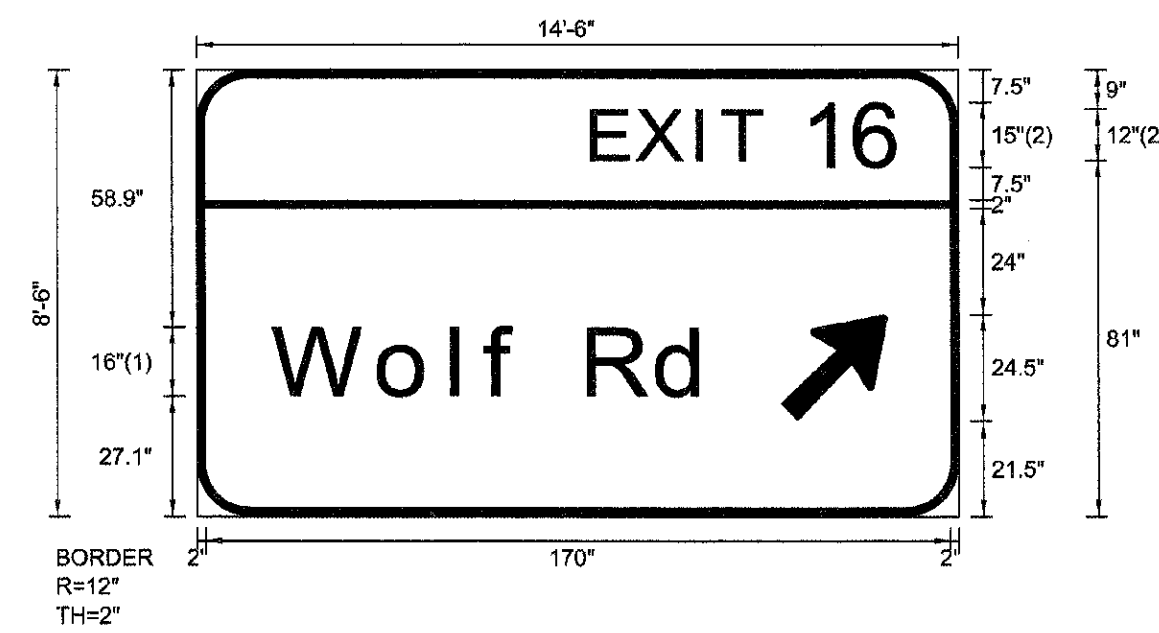


FONT:
(1) ClearviewHwy-5-W-R
(2) ClearviewHwy-5-W

| SYMBOL | ROT | X | Y | WID | HT |
|---|---|---|---|---|---|
| ARMED | 45 | 133.3 | 21.5 | 20 | 31.5 |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

## LETTER POSITIONS (X)

| | | | | | | | LENGTH | SERIES/SIZE |
|---|---|---|---|---|---|---|---|---|
| E | X | I | T | 1 | 6 | | | ClearviewHwy-5-W |
| 91 | 101.2 | 114.9 | 120.8 | 139.5 | 151.6 | | 71.4 | 12,15 |
| W | o | l | f | | R | d | | ClearviewHwy-5-W-R |
| 18 | 42.2 | 58.9 | 66.5 | 74.2 | 90 | 105.7 | 99.3 | 16/13 |

| | | | |
|---|---|---|---|
| FILE NAME = | DESIGNED - SEW | REVISED - | |
| $FILEL$ | DRAWN - SEW | REVISED - | |
| USER NAME = $USER$ | CHECKED - FML | REVISED - | |
| PLOT DATE = $DATE$ | DATE - 12/2009 | REVISED - | |

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

**STATE OF ILLINOIS**
**DEPARTMENT OF TRANSPORTATION**

**SIGNING DETAILS**

SCALE: N.T.S. | SHEET NO. 43 OF 77 SHEETS | STA. | TO STA.

| F.A.I. RTE. | SECTION | COUNTY | TOTAL SHEETS | SHEET NO. |
|---|---|---|---|---|
| 290 | (3031.1, ETC., 3838)RS-5 | COOK | 413 | 371 |
| | | CONTRACT NO. 60G52 | | |
| FED. ROAD DIST. NO. | ILLINOIS | FED. AID PROJECT | | |