SIGN DETAIL
1:75

WB-TR-80
STA. 624+50

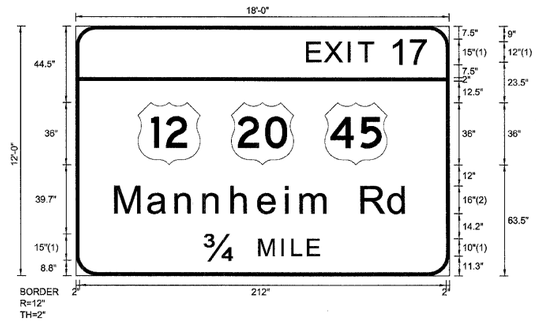

SIGN NUMBER	name	
WIDTH x HGHT.	18'-0" x 12'-0"	
BORDER WIDTH	2"	
CORNER RADIUS	12"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White/White

SYMBOL	ROT	X	Y	WID	HT
M1_4	0	36	63.5	36	36
M1_4	0	90	63.5	36	36
M1_4	0	144	63.5	36	36

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

																																					LENGTH	SERIES/SIZE
E	X	I	T	1	7																																	ClearviewHwy-5-W
134.2	144.4	158.1	164	182.7	193.9																																70.3	12,15
M	a	n	n	h	e	i	m		R	d																												ClearviewHwy-5-W-R
23.2	42.1	58.1	74.2	90.4	105.9	121.8	130.3	148.3	165.5	181.3																											169.7	16/13
3/4	M	I	L	E																																		ClearviewHwy-5-W
75.2	106.4	119.5	125.4	134.5																																	65.7	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 54 OF 77 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(3031.1, ETC., 3838)RS-5	COOK	413	382
		CONTRACT NO. 60G52		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		