SIGN DETAIL
1:75

WB-TR-95
STA. 734+30

SIGN NUMBER	name	
WIDTH x HGHT.	14'-0" x 11'-6"	
BORDER WIDTH	2"	
CORNER RADIUS	12"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White/White

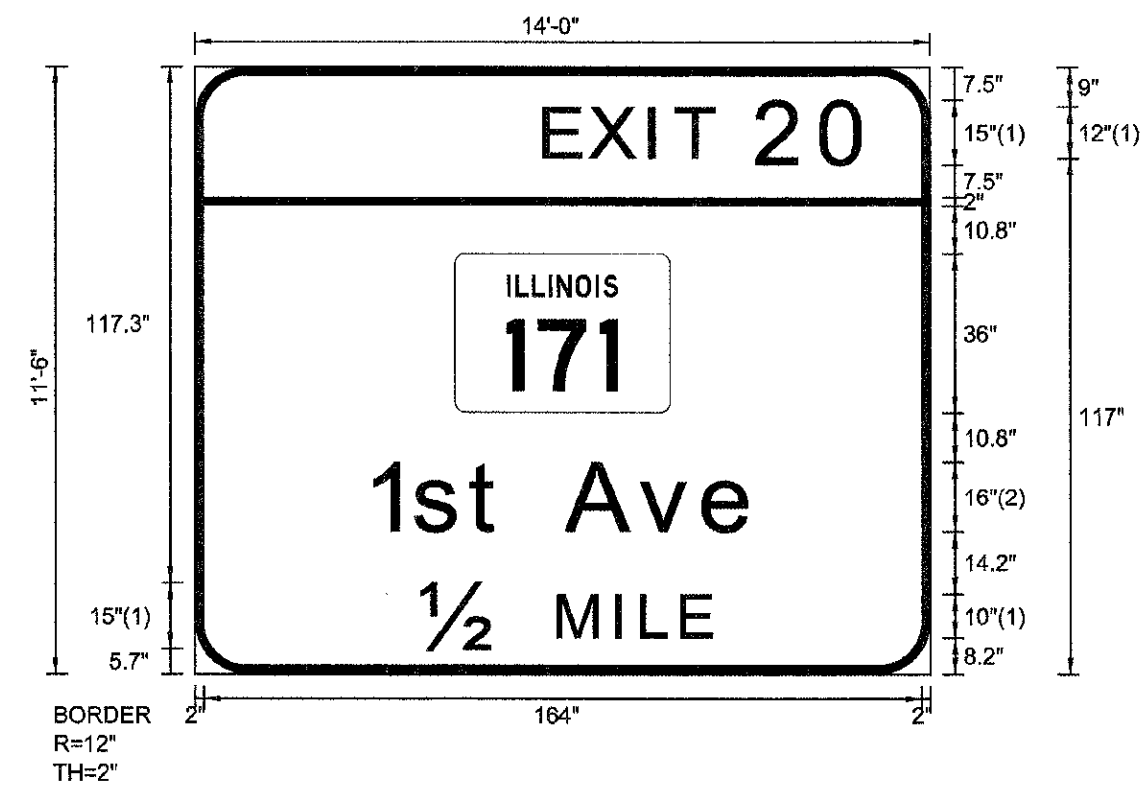

FONT:
(1) ClearviewHwy-5-W
(2) ClearviewHwy-5-W-R

SYMBOL	ROT	X	Y	WID	HT
M1-I100A-2-22-10D	0	39	61	49.1	36

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

							LENGTH	SERIES/SIZE
E	X	I	T	2	0			ClearviewHwy-5-W
44.5	53.1	64.5	69.4	86.6	101.8		69.5	10,15
1	s	t		A	v	e		ClearviewHwy-5-W-R
24.4	35.4	48.2	56	70.4	86.9	101.6	89	16/13
1/2	M	I	L	E				ClearviewHwy-5-W
36	67.3	80.5	86.4	95.4			65.8	15,10

FILE NAME =	DESIGNED - SEW	REVISED -	LIN ENGINEERING,LTD. Consulting Engineers Chatham, Illinois Westmont, Illinois
$FILEL$	DRAWN - SEW	REVISED -	
USER NAME = $USER$	CHECKED - FML	REVISED -	
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -	

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 63 OF 77 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(3031.1, ETC., 3838)RS-5	COOK	413	391
		CONTRACT NO. 60G52		

FED. ROAD DIST. NO. | ILLINOIS | FED. AID PROJECT