SIGN DETAIL
1:75

EB-BM-103
STA. 1037+40

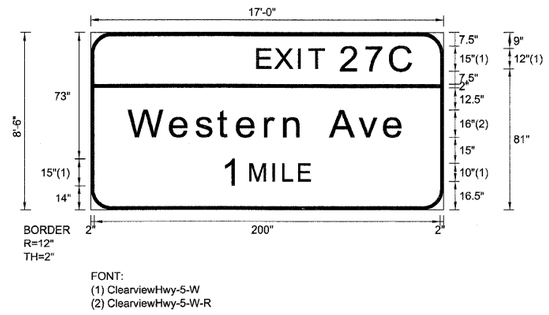

SIGN NUMBER	name	
WIDTH x HGHT.	17'-0" x 8'-6"	
BORDER WIDTH	2"	
CORNER RADIUS	12"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White/White

SYMBOL	ROT	X	Y	WID	HT

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																																						LENGTH	SERIES/SIZE
E	X	I	T	2	7	C																																	ClearviewHwy-5-W
96.7	107	120.7	126.6	145.2	159.4	173.8																																89.3	12,15
W	e	s	t	e	r	n		A	v	e																													ClearviewHwy-5-W-R
22.2	46.4	61.1	73.9	85.1	101.3	112.3	123.3	138.8	155.4	170.1																												159.6	16/13
1	M	I	L	E																																			ClearviewHwy-5-W
76.9	92.6	105.8	111.7	120.7																																		50.2	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - SEW	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 9 OF 79 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(2828B,D, ETC., 3031.1)RS-6	COOK	300	222
		CONTRACT NO. 60G53		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		