SIGN DETAIL
1:75

EB-BM-113
STA. 1104+40

SIGN NUMBER	name
WIDTH x HGHT.	15'-6" x 7'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

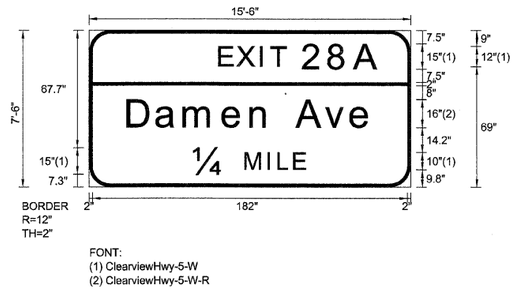

SYMBOL	ROT	X	Y	WID	HT

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)									LENGTH	SERIES/SIZE
E	X	I	T	2	8	A				ClearviewHwy-5-W
75.7	86	99.6	105.6	124.2	139.3	154			92.3	12,15
D	a	m	e	n		A	v	e		ClearviewHwy-5-W-R
22.6	39.1	55.1	77.6	93.8	104.9	120.4	136.9	151.6	140.7	16/13
¼	M	I	L	E						ClearviewHwy-5-W
60.8	90.8	103.9	109.8	118.9					64.5	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - SEW	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 15 OF 79 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(2828B,D, ETC., 3031.1)RS-6	COOK	300	228
		CONTRACT NO. 60G53		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		