SIGN DETAIL
1:75

EB-BM-124
STA. 1170+30

SIGN NUMBER	name
WIDTH x HGHT.	19'-6" x 7'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

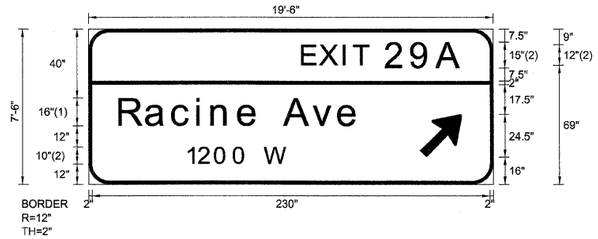

SYMBOL	ROT	X	Y	WID	HT
ARMED	45	191.5	16	20	31.5

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

										LENGTH	SERIES/SIZE
E	X	I	T	2	9	A					ClearviewHwy-5-W
123.9	134.2	147.9	153.8	172.4	187.3	202				92.1	12,15
R	a	c	i	n	e		A	v	e		ClearviewHwy-5-W-R
18	33.4	48.7	62.9	71.4	86.9	98.7	113.5	130	144.8	138.5	16/13
1	2	0	0		W						ClearviewHwy-5-W-R
56.6	63.7	73.2	84.1	92.3	101.8					58.4	10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - SEW	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 24 OF 79 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(2828B,D, ETC., 3031.1)RS-6	COOK	300	237
		CONTRACT NO. 60C53		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		