SIGN DETAIL
1:75

WB-BM-108
STA. 916+90

SIGN NUMBER	name
WIDTH x HGHT.	16'-0" x 9'-0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

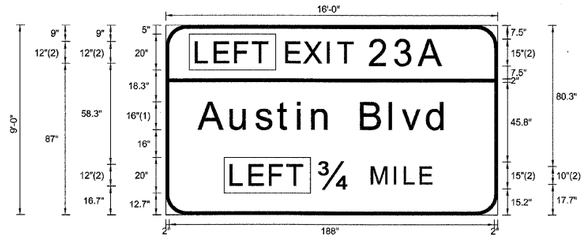

FONT:
(1) ClearviewHwy-5-W-R
(2) ClearviewHwy-5-W

SYMBOL	ROT	X	Y	WID	HT

Panel Style: guide_exp_interchange.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

											LENGTH	SERIES/SIZE
L	E	F	T									ClearviewHwy-5-W
18	28.8	40.5	50.6								41.2	12
E	X	I	T	2	3	A						ClearviewHwy-5-W
70.2	80.4	94.1	100	118.6	133	147.1					91	12,15
A	u	s	t	i	n		B	l	v	d		ClearviewHwy-5-W-R
19.4	37.9	52.4	65.2	76.7	85.1	96.2	113.4	130	137	151.7	143.9	16/13
L	E	F	T									ClearviewHwy-5-W
38.1	48.9	60.6	70.7								41.2	12
3/4	M	I	L	E								ClearviewHwy-5-W
89.3	119.5	132.7	138.6	147.6							64.7	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - SEW	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 40 OF 79 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(2828B,D, ETC., 3031.1)RS-6	COOK	300	253
		CONTRACT NO. 60G53		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		