SIGN DETAIL

1:75

WB-BM-123
STA. 1051+55

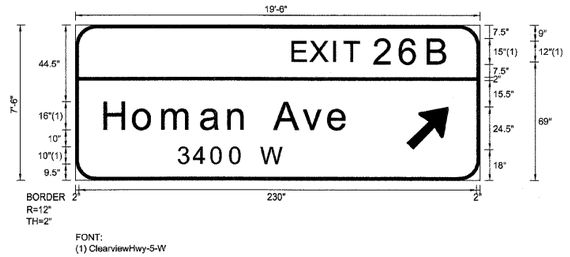

FONT:
(1) ClearviewHwy-5-W

SIGN NUMBER	name
WIDTH x HGHT.	19'-6" x 7'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
ARMED	45	191.5	18	20	31.5

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)										LENGTH	SERIES/SIZE
E	X	I	T	2	6	B					ClearviewHwy-5-W
126	136.3	149.9	155.9	173.5	188.6	204.6				90	12,15
H	o	m	a	n		A	v	e			ClearviewHwy-5-W-R
17.1	34	50.7	72.9	88.9	100	115.4	132	146.7		141.3	1613
3	4	0	0		W						ClearviewHwy-5-W-R
59.5	68.6	78.9	89.8	97.9	107.5					61.2	10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - SEW	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 51 OF 79 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(2828B,D, ETC., 3031.)RS-6	COOK	300	264
		CONTRACT NO. 60053		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		