SIGN DETAIL

1:75

WB-BM-130
STA. 1118+70

SIGN NUMBER	name	
WIDTH x HGHT.	15'-6" x 8'-6"	
BORDER WIDTH	2"	
CORNER RADIUS	12"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White/White

SYMBOL	ROT	X	Y	WID	HT

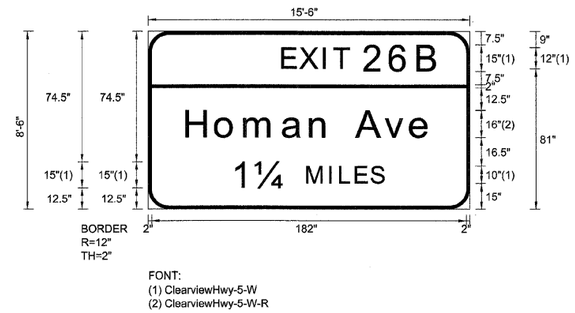

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

									LENGTH	SERIES/SIZE
E	X	I	T	2	6	B				ClearviewHwy-5-W
78	88.3	101.9	107.9	125.5	140.6	156.6			90	12,15
H	o	m	a	n		A	v	e		ClearviewHwy-5-W-R
22.3	39.2	56	78.2	94.1	105.2	120.6	137.2	151.9	141.3	16/13
1		¼	M	I	L	E	S			ClearviewHwy-5-W
49.5	56.2	62.2	92.2	105.4	111.3	120.3	129.3		87	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - SEW	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 55 OF 79 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(2828B,D, ETC., 3031.1)RS-6	COOK	300	268
		CONTRACT NO. 60G53		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		