SIGN DETAIL

1:75

WB-BM-131
STA. 1118+70

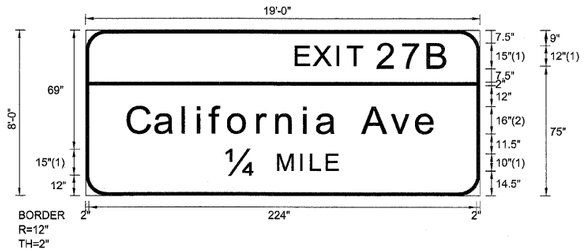

FONT:
(1) ClearviewHwy-5-W
(2) ClearviewHwy-5-W-R

SIGN NUMBER	name	
WIDTH x HGHT.	19'-0" x 8'-0"	
BORDER WIDTH	2"	
CORNER RADIUS	12"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White/White

SYMBOL	ROT	X	Y	WID	HT

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)														LENGTH	SERIES/SIZE
E	X	I	T	2	7	B									ClearviewHwy-5-W
122	132.2	145.9	151.8	169.5	183.6	198.6								88	12,15
C	a	l	i	f	o	r	n	i	a		A	v	e		ClearviewHwy-5-W-R
24.6	40.5	56.5	65	72.2	82.9	99.7	110.7	126.5	134	145.9	160.4	176.9	191.7	178.8	16/13
¼	M	I	L	E											ClearviewHwy-5-W
81.6	111.6	124.8	130.7	139.7										64.5	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - SEW	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING, LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 56 OF 79 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(2828B,D, ETC., 3031.1)RS-6	COOK	300	269
		CONTRACT NO. 60G53		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		