SIGN DETAIL

1:75

WB-BM-133
STA. 1132+20

SIGN NUMBER	name
WIDTH x HGHT.	19'-0" x 8'-0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

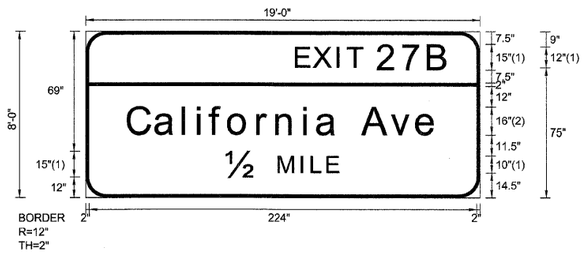

FONT:
(1) ClearviewHwy-5-W
(2) ClearviewHwy-5-W-R

SYMBOL	ROT	X	Y	WID	HT

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)

															LENGTH	SERIES/SIZE
E	X	I	T	2	7	B										ClearviewHwy-5-W
122	132.2	145.9	151.8	169.4	183.6	198.6									88	12,15
C	a	l	i	f	o	r	n	i	a		A	v	e			ClearviewHwy-5-W-R
24.6	40.5	56.5	65	72.2	82.9	99.7	110.7	126.5	134	145.9	160.4	176.9	191.6		178.8	16/13
½	M	I	L	E												ClearviewHwy-5-W
81.6	111.9	125.1	131	140											64.8	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - SEW	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Wilmington, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 58 OF 79 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(2828B,D, ETC., 3031.1)RS-6	COOK	300	271
		CONTRACT NO. 60G53		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		