SIGN DETAIL

1:75

WB-BM-138
STA. 1159+20

SIGN NUMBER	name
WIDTH x HGHT.	15'-0" x 8'-0"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT

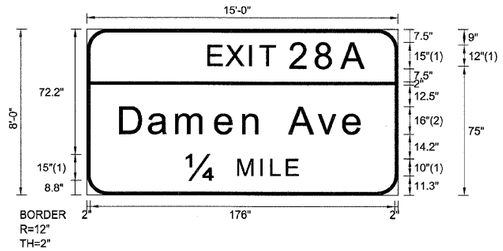

FONT:
(1) ClearviewHwy-5-W
(2) ClearviewHwy-5-W-R

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																																					LENGTH	SERIES/SIZE
E	X	I	T	2	8	A																																ClearviewHwy-5-W
70.7	81	94.6	100.6	118.2	133.3	148																															91.3	12,15
D	a	m	e	n		A	v	e																														ClearviewHwy-5-W-R
19.6	36.1	52.1	74.6	90.8	101.9	117.4	133.9	148.6																													140.7	16/13
¼	M	I	L	E																																		ClearviewHwy-5-W
57.8	87.8	100.9	106.8	115.9																																	64.5	15,10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - SEW	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 62 OF 79 SHEETS | STA. TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(2828B,D, ETC., 3031.1)RS-6	COOK	300	275
		CONTRACT NO. 60G53		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		