SIGN DETAIL

1:75

WB-BM-147
STA. 1205+60

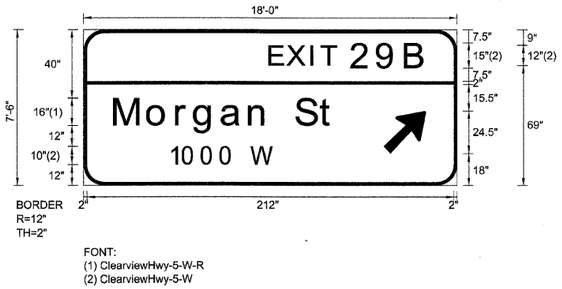

FONT:
(1) ClearviewHwy-5-W-R
(2) ClearviewHwy-5-W

SIGN NUMBER	name
WIDTH x HGHT.	18'-0" x 7'-6"
BORDER WIDTH	2"
CORNER RADIUS	12"
MOUNTING	Overhead
BACKGROUND	TYPE: Reflective
	COLOR: Green
LEGEND/BORDER	TYPE: Reflective
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
ARMED	45	173.5	18	20	31.5

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)																																		LENGTH	SERIES/SIZE
E	X	I	T	2	9	B																													ClearviewHwy-5-W
108	118.2	131.9	137.8	155.4	170.4	186.6																												90.1	12,15
M	o	r	g	a	n		S	t																											ClearviewHwy-5-W-R
18	37.3	54	64.4	80.2	96.1	107.2	123.1	137.2																										127	1613
1	0	0	0		W																													ClearviewHwy-5-W-R
49.9	57.5	68.4	79.3	87.5	97																												60.3	10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - SEW	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 69 OF 79 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	(2828B,D, ETC., 3031.1)RS-6	COOK	300	282
		CONTRACT NO. 60G53		
FED. ROAD DIST. NO.	ILLINOIS	FED. AID PROJECT		