SIGN DETAIL
1:75

WB-BM-32
STA. 327+80

SIGN NUMBER	name	
WIDTH x HGHT.	16'-0" x 8'-0"	
BORDER WIDTH	2"	
CORNER RADIUS	12"	
MOUNTING	Overhead	
BACKGROUND	TYPE:	Reflective
	COLOR:	Green
LEGEND/BORDER	TYPE:	Reflective
	COLOR:	White/White

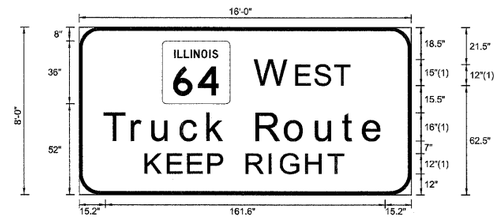

FONT:
(1) ClearviewHwy-5-W

SYMBOL	ROT	X	Y	WID	HT
M1-I100A-2-22-10D	0	48	52	39.3	36

Panel Style: sign_default.ssi
Dimensions are in inches.tenths

Letter locations are panel edge to lower left corner

LETTER POSITIONS (X)											LENGTH	SERIES/SIZE
W	E	S	T									ClearviewHwy-5-W
99.3	119	129.8	141.2								50.5	12
T	r	u	c	k		R	o	u	t	e		ClearviewHwy-5-W
25.3	39.4	49.9	64.1	77.6	87.5	102.4	117	132.5	146	156.4	141.4	14/11.4
K	E	E	P		R	I	G	H	T			ClearviewHwy-5-W
48.5	59.1	68.9	78.6	85.9	97	108	113.5	125.7	136.3		95	10

FILE NAME =	DESIGNED - SEW	REVISED -
$FILEL$	DRAWN - SEW	REVISED -
USER NAME = $USER$	CHECKED - FML	REVISED -
PLOT DATE = $DATE$	DATE - 12/2009	REVISED -

LIN ENGINEERING,LTD.
Consulting Engineers
Chatham, Illinois Westmont, Illinois

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

SIGNING DETAILS

SCALE: N.T.S. | SHEET NO. 28 OF 58 SHEETS | STA. | TO STA.

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
290	2009-099BR	COOK/DUPAGE	394	356
		CONTRACT NO. 60I57		

FED. ROAD DIST. NO. | ILLINOIS | FED. AID PROJECT