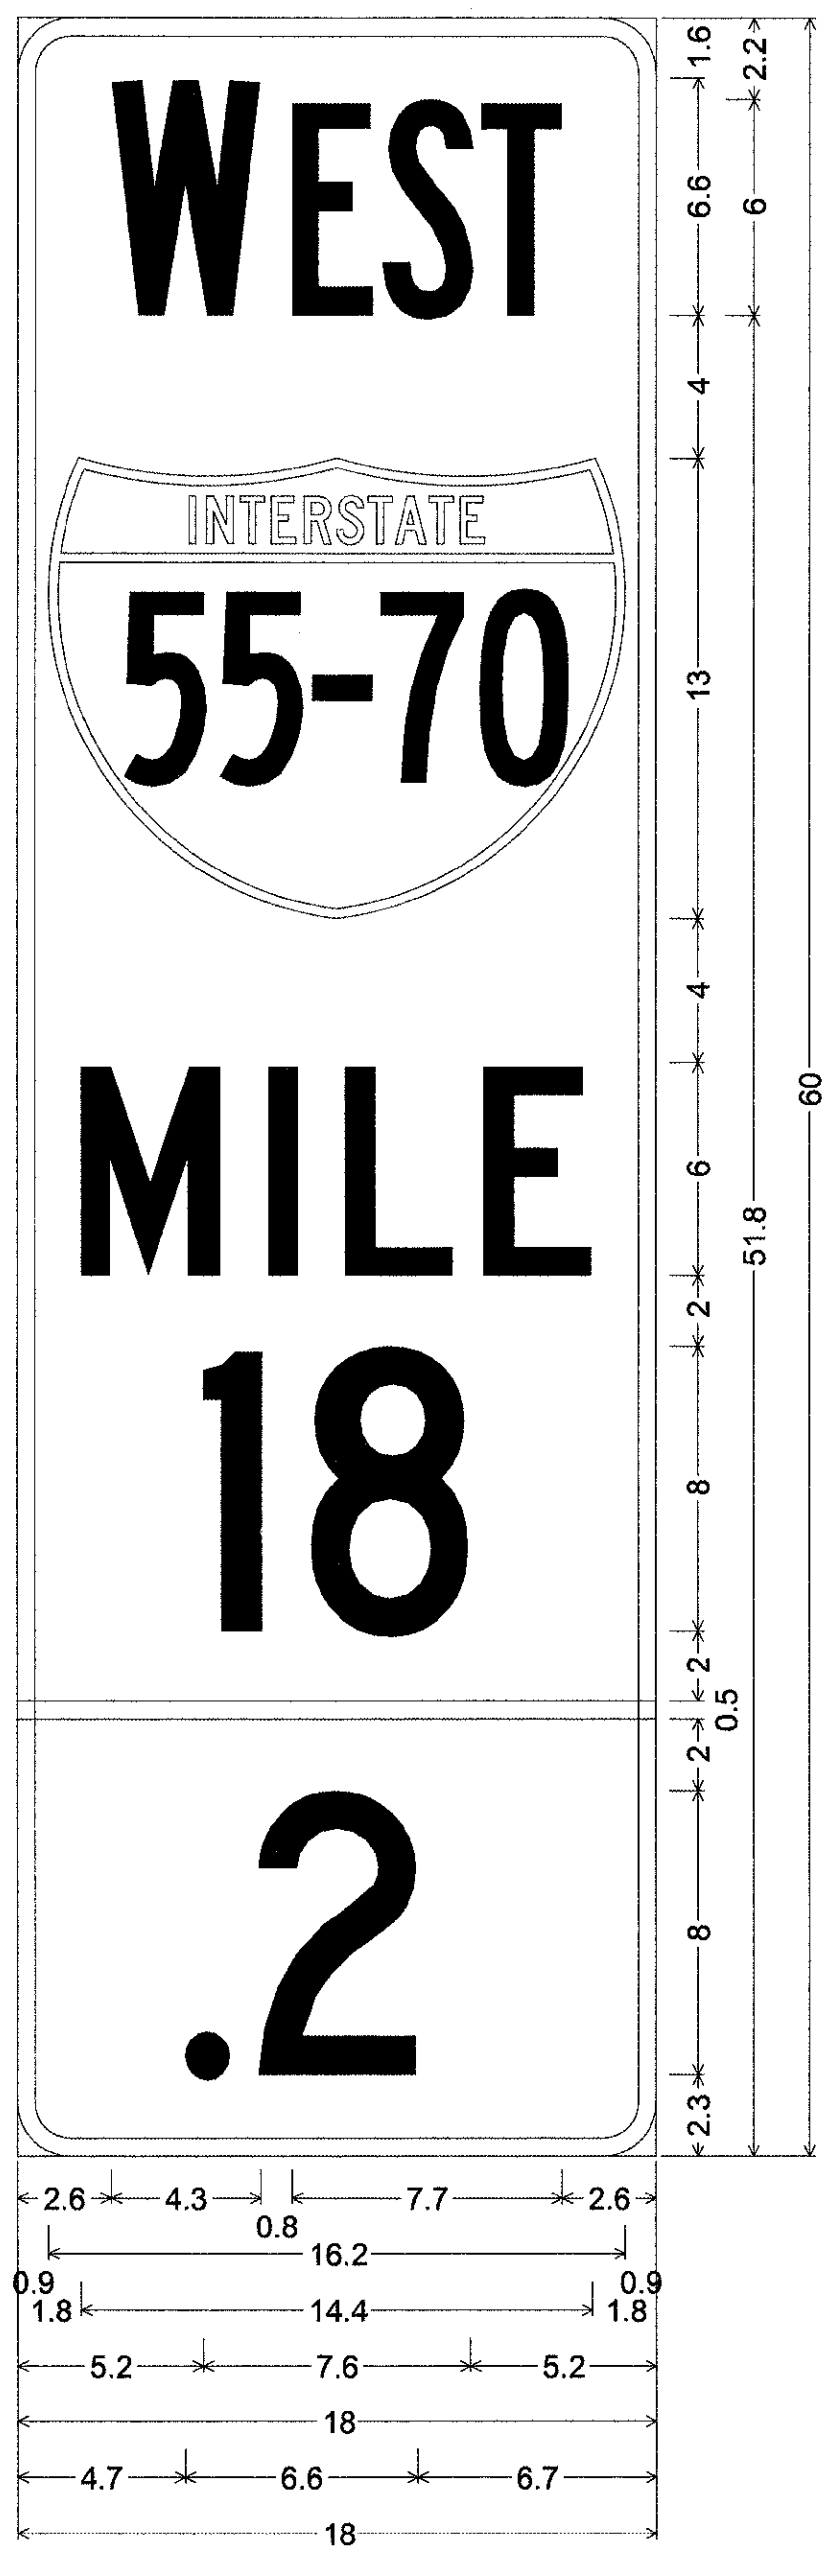

1.5" Radius, 0.5" Border, White on Green;
[W EST] B 2K 43% spacing;
[MILE] C 2K; [18] C 2K; [.2] C 2K;
Table of widths and spaces.

	W		E		S		T	
2.6	4.3	0.8	2.3	0.3	2.6	0.2	2.3	2.6

0.9	16.2	0.9

	M		I		L		E	
1.8	4.0	1.3	0.8	1.3	3.1	0.8	3.1	1.8

	1		8	
5.2	1.7	1.4	4.5	5.2

-0.0	18.0	0.0

	.		2	
4.7	1.3	0.8	4.5	6.7

1.5" Radius, 0.5" Border, White on Green;
[E AST] B 2K 43% spacing;
[MILE] C 2K; [18] C 2K; [.2] C 2K;
Table of widths and spaces.

	E		A		S		T	
3.2	2.5	0.5	3.3	0.2	2.6	0.2	2.3	3.2

0.9	16.2	0.9

	M		I		L		E	
1.8	4.0	1.3	0.8	1.3	3.1	0.8	3.1	1.8

	1		8	
5.2	1.7	1.4	4.5	5.2

-0.0	18.0	0.0

	.		2	
4.7	1.3	0.8	4.5	6.7

NOTE ".2" IS CENTER ABOUT THE "2" WITH NO REGARD TO THE DECIMAL.

STATION	SIGN PANEL - TYPE 1		METAL POST - TYPE B
	EB	WB	
	SQ FT	SQ FT	FOOT
465+56	7.5	7.5	16
479+12	7.5	7.5	16
489+68	7.5	7.5	16
500+24	7.5	7.5	16
510+80	7.5	7.5	16
521+36	7.5	7.5	16
531+92	7.5	7.5	16
542+48	7.5	7.5	16
553+04	7.5	7.5	16
563+60	7.5	7.5	16
SUB-TOTAL	75	75	160
TOTALS	150		

NOTES:

THE RESIDENT ENGINEER WILL CONTACT JEFF ABEL (618-346-3283) FOR EXACT PLACEMENT OF SIGNS.

SIGNS SHALL BE PLACED IN THE CENTER OF THE MEDIAN, BACK-TO-BACK ON ONE POST.

FILE NAME = c:\pw_work\PWIDOT\CONOVERPJ\d0133026\d876c56-sht-sign.dgn
USER NAME = conoverpj
PLOT SCALE = 50.0000 '/ IN.
PLOT DATE = 10/7/2009

DESIGNED - ___
DRAWN - ___
CHECKED - ___
DATE - ________

REVISED - ___
REVISED - ___
REVISED - ___
REVISED - ___

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

MILE MARKER PANEL DETAILS

SCALE: ________ SHEET NO. __ OF ___ SHEETS STA. ________ TO STA. ________

F.A.I. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
70	60-(5,6,7)RS, 60-(6,7)BR	MADISON	185	185

CONTRACT NO. 76C56

FED. ROAD DIST. NO. _ ILLINOIS FED. AID PROJECT