



RIP RAP AT FLARED END SECTION


GUTTER OUTLET FOR B6.12 CURB AND GUTTER

TO BE PAID AS LINEAL FEET OF THE CURB SPECIFIED

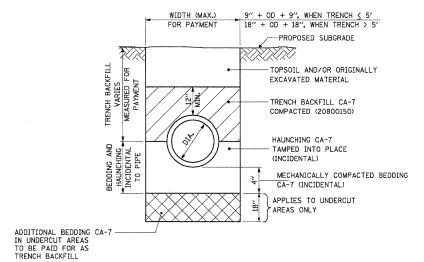

PROPOSED TRENCH - PVC CULVERT PIPE - PERFORATED DETAIL SEE PLANS FOR UNDERDRAIN LOCATIONS

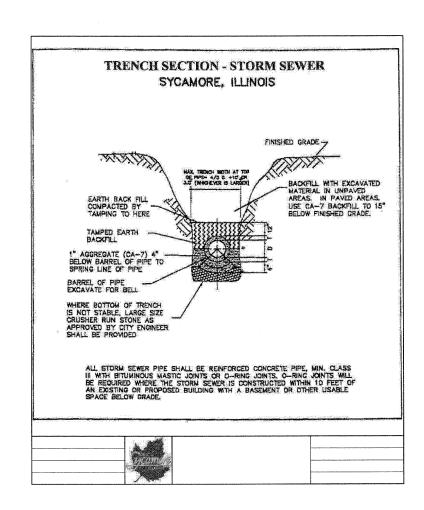

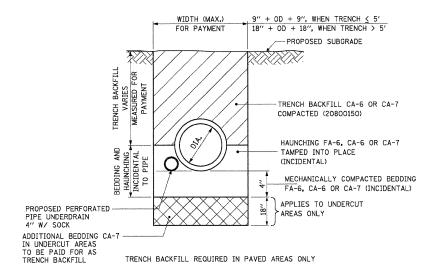

NO TRENCHBACKFILL WILL BE COMPUTED FOR THE PIPE UNDERDRAIN THAT IS IN THE SAME TRENCH AS THE CULVERT/STORM SEWER PIPE.

PROPOSED TRENCH - CULVERT PIPE WITH UNDERDRAIN DETAIL SEE PLANS FOR UNDERDRAIN LOCATIONS

> WIDTH VARIES 9" + OD + 9", WHEN TRENCH < 5" 18" + OD + 18", WHEN TRENCH > 5" PROPOSED SUBGRADE PROPOSED
> TRENCH BACKFILL CA-6 OR CA-7 -EXISTING CULVERT TO BE REMOVED

TRENCH BACKFILL - EXISTING CULVERT REMOVAL IN PAVED AREAS

TRENCH BACKFILL REQUIRED IN PAVED AREAS ONLY.
IN NON PAVED AREAS CONTRACTOR MAY REPLACE
WITH ORIGINALLY EXCAVATED MATERIALS.

-		WILLS BURKE KELSEY ASSOCIATES 116 West Main Street, Suite 201 St. Charles, Illinois 60174 (630) 443-7755	LTD.
1	Leanner Control &	(630) 443-7755	

USER NAME = SUSERS	DESIGNED -	KMA	KENISED -
	DRAWN -	NDP	REVISED -
PLOT SCALE = NONE	CHECKED -	SBP	REVISED -
PLOT DATE = 10/28/2009	DATE -	10/1/09	REVISED -

STATE OF ILLINOIS **DEPARTMENT OF TRANSPORTATION**

		DETAILS		F.A RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEE NO.	
	GENERAL CONSTRUCTION			5369	09-00068-00-FP	DEKALB	54	33	
GENERAL CONSTRUCTION						CONTRACT	NO.874	406	
	SCALE: NONE	SHEET NO. 33 OF 54	SHEETS STA.	TO STA.	FED. ROAD DIST. NO. 3 ILLINOIS FED. AID PROJECT				