




STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

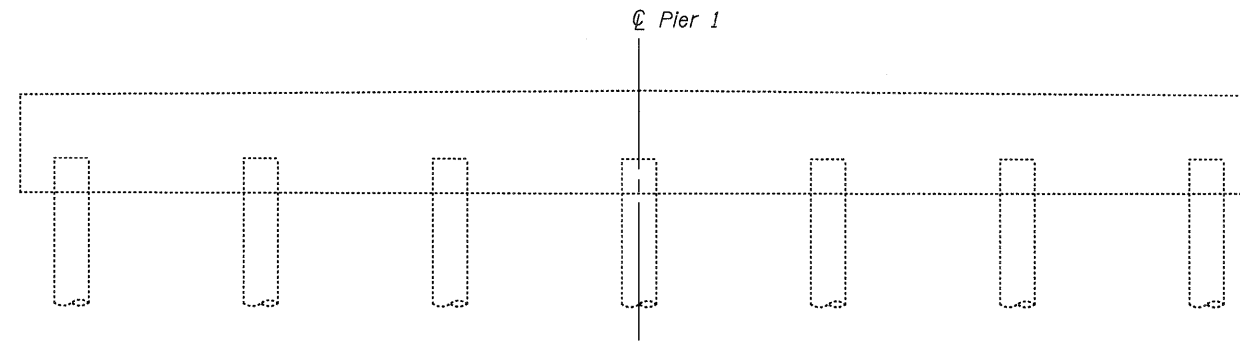


PIER 1 - NORTH FACE
Looking South
C Pier 1

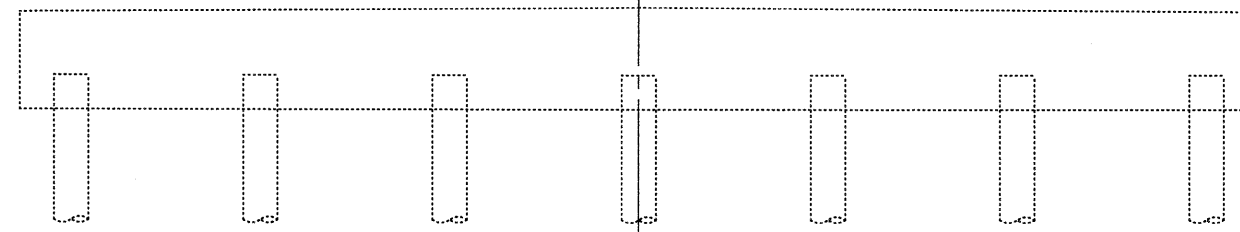

PIER 1 - SOUTH FACE
Looking North
C Pier 1

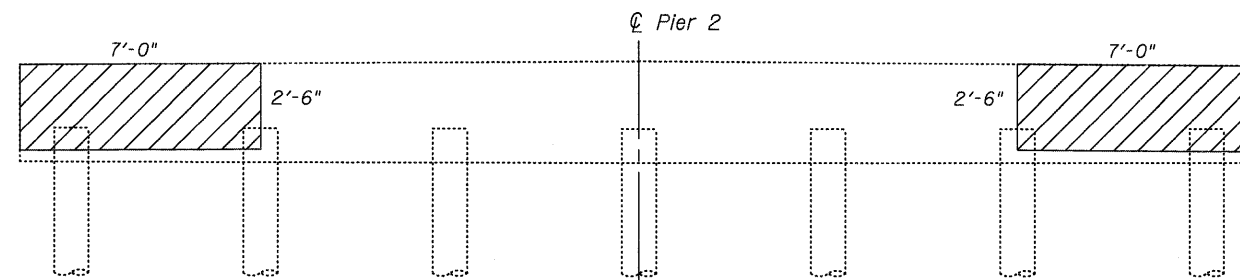

PIER 2 - NORTH FACE
Looking South
C Pier 2

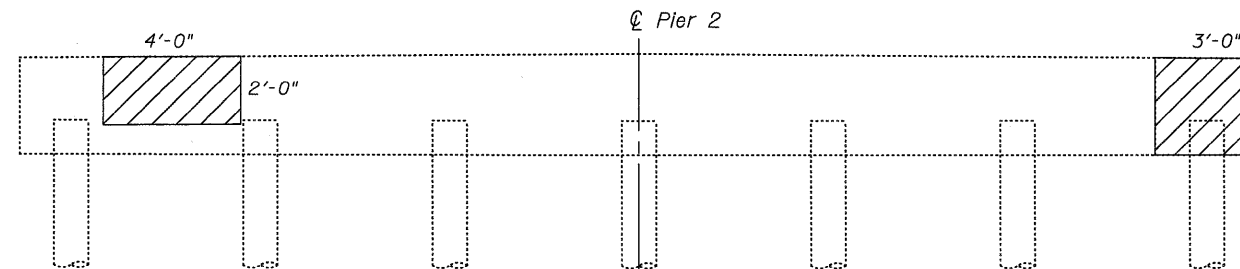

PIER 2 - SOUTH FACE
Looking North
C Pier 2

TOTAL BILL OF MATERIAL

ITEM	UNIT	TOTAL
Structural Repair of Concrete (Depth ≤ 5")	Sq. Ft.	51

Note:

The Engineer shall locate the proposed repair and make adjustments to plan quantity as necessary. Such adjustments shall not be cause for additional compensation for a change in scope of the work, however the Contractor will be paid for the actual quantity furnished at the unit bid price for the work.

Structural Repair of Concrete (Depth ≤ 5")

SUBSTRUCTURE REPAIR DETAILS
PAWNEE ROAD (FAS 1622)
OVER BRUSH CREEK

DESIGNED - CMV
CHECKED - SDS
DRAWN - DLH
CHECKED - CMV

WHKS & CO.
ENGINEERING

7018 KINGSMILL CT.,
SPRINGFIELD, IL
(217) 483-9457
DESIGN FIRM #184001036

SHEET NO.	F.A.S. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
6	1622	07-00100-00-BR	SANGAMON	16	10
12 SHEETS			S.N. 084-3037		
FED. ROAD DIST. NO. -			ILLINOIS FED. AID PROJECT		
			CONTRACT NO. 93506		