
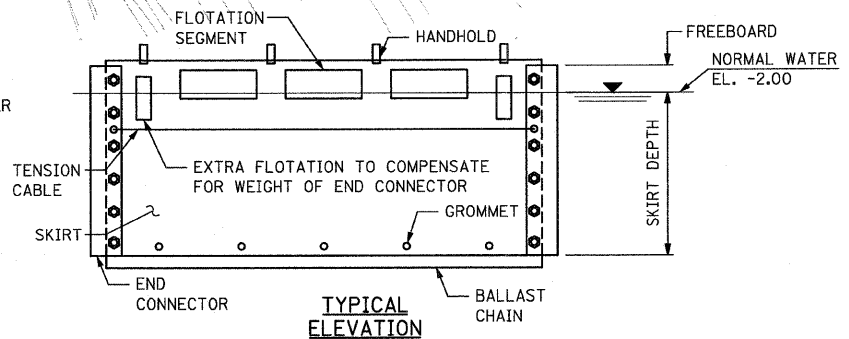


PLAN

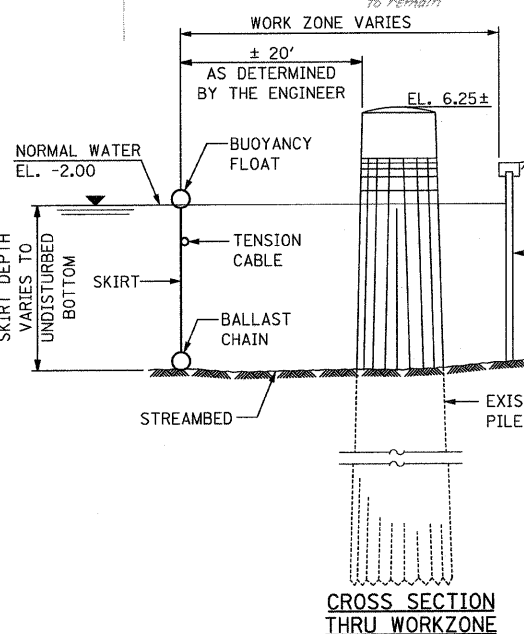

NOTES:

1. ANY EXISTING CHANNEL EMBANKMENT TURF DAMAGED DURING CONSTRUCTION SHALL BE REPLACED OR REPAIRED ACCORDING TO ARTICLE 250.06 (b) OF THE STANDARD SPECIFICATIONS AND/OR AS DIRECTED BY THE ENGINEER. THIS COST SHALL BE INCLUDED IN THE CONTRACT.
2. THE CONTRACTOR SHALL INSTALL A FLOATING BOOM AROUND THE WORK BARGE AREA IN THE EVENT OF OIL AND/OR FUEL LEAKAGE FROM CONSTRUCTION EQUIPMENT AND TO ACCUMULATE EXCESS BROKEN TIMBER PILE PIECES DURING THE DOLPHIN REMOVAL ACTIVITIES. THIS COST SHALL BE INCLUDED WITH SEDIMENT CONTROL SILT CURTAIN.
3. ANCHOR CURTAIN TO MAINTAIN STATIONARY LOCATION THROUGHOUT CONSTRUCTION.
4. SEE SPECIAL PROVISIONS FOR SEDIMENT CONTROL SILT CURTAIN.
5. SEE STANDARD 280001 FOR PERIMETER EROSION BARRIER DETAILS.

LEGEND



USER NAME = pasteld	DESIGNED - SBC	REVISED -
FILE NAME = 0160E11-shr-eros.dgn	DRAWN - DCP	REVISED -
PLOT SCALE = NONE	CHECKED - AH	REVISED -
PLOT DATE = 10/15/2008	DATE - 10/15/08	REVISED -

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

EROSION AND SEDIMENT CONTROL PLAN

SCALE: NONE	SHEET NO. 6 OF 7a SHEETS	STA. 379+09.67 TO STA. 382+42.67
-------------	--------------------------	----------------------------------

F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
389	2424.2 B-1	COOK	23	6
CONTRACT NO. 60E11				
FED. ROAD DIST. NO. 1 ILLINOIS FED. AID PROJECT				