

# STOP LINE SIGN FOR TEMPORARY SIGNALS



SIZE: 600(24) x 600(24)

100(4) CAPITAL LETTERS - BLACK

13 (1/2) BORDER - BLACK

WHITE REFLECTIVE - TYPE AP  
HIGH INTENSITY PRISMATIC SHEETING

**GENERAL NOTE:**

THIS SIGN SHALL BE INSTALLED AT THE STOP LINE AS DIRECTED BY ENGINEER.



ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

REVISED - 1-22-07

**STOP LINE SIGN FOR TEMPORARY SIGNALS**

**99.4**

# EROSION CONTROL DETAILS FOR SILT FENCE

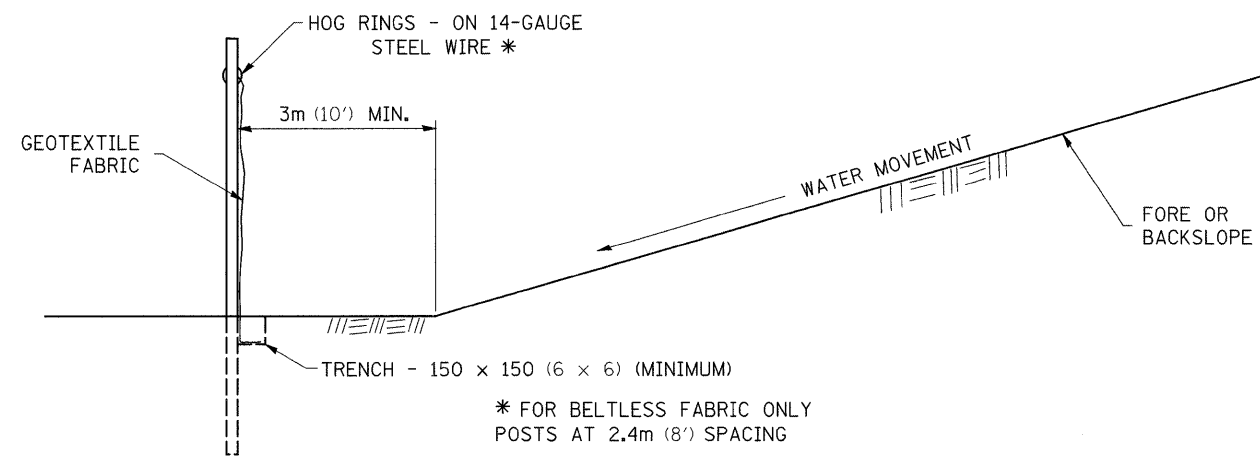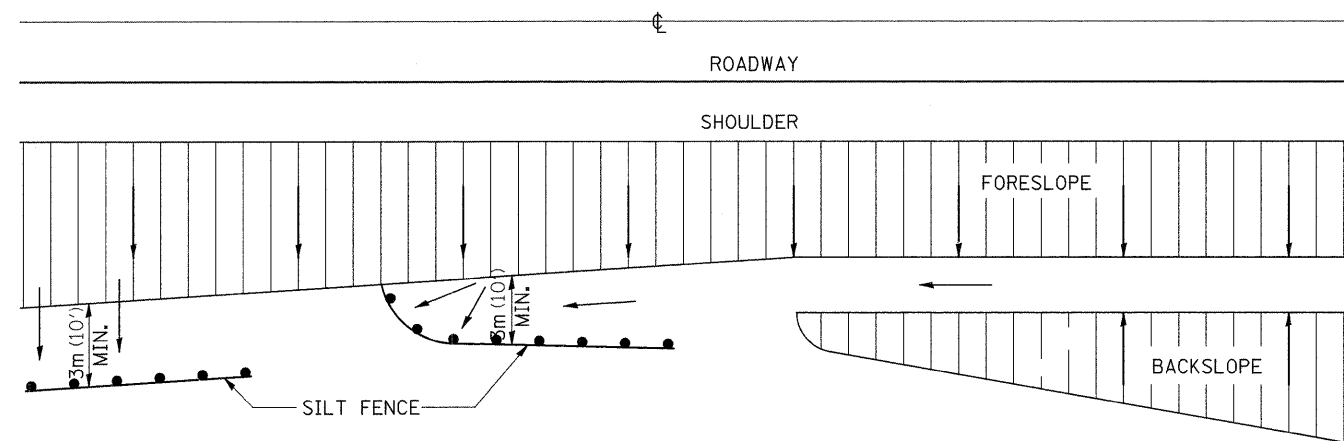

DETAILS OF SILT FENCE

ALL DIMENSIONS ARE IN MILLIMETERS (INCHES) UNLESS OTHERWISE NOTED.

REVISED - 10-22-01	<b>REGION 2 / DISTRICT 2 STANDARD</b>				F.A.P. RTE.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
REVISED -					654	(107, 108, 109)RS-4	STEPHENSON	89	71
REVISED -					CONTRACT NO. 64C91				
REVISED -					SCALE: 50:0000 "/ IN SHEET NO. OF SHEETS STA. TO STA.				
					FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT				

PLOT DATE = Wed Sep 24 08:55:23 2008