



| FAP RTE             | SECTION    | COUNTY   | TOTAL SHEETS     | SHEET NO. |
|---------------------|------------|----------|------------------|-----------|
| 328                 | (6BR-1)B-1 | CLAY     | 109              | 12        |
| STA.                |            | TO STA.  |                  |           |
| FED. ROAD DIST. NO. |            | ILLINOIS | FED. AID PROJECT |           |

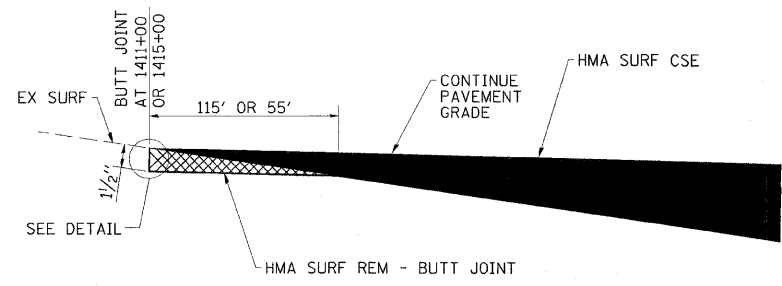

**TYPICAL BUTT JOINT SECTION**  
**SN 013-2009**

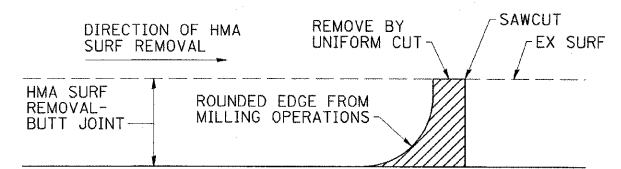


**DETAIL AT BUTT JOINT**

NOTE:  
WHEN MILLING OPERATIONS PRODUCE A ROUNDED EDGE, THEN A SAWCUT SHALL BE USED TO MANUFACTURE A PERPENDICULAR EDGE AS SHOWN IN THE DETAIL. THE COST OF ALL WORK SHOWN IN THE DETAIL IS INCLUDED IN HOT-MIX ASPHALT SURFACE REMOVAL - BUTT JOINT. THE ENGINEER SHALL BE THE SOLE JUDGE CONCERNING THE USE OF THIS DETAIL.

|                     |     |       |
|---------------------|-----|-------|
| <b>DESIGNED BY:</b> | JMS | 04/08 |
| <b>DRAWN BY:</b>    | HAS | 04/08 |
| <b>CHECKED BY:</b>  | MTD | 05/08 |
| <b>APPROVED BY:</b> | RDP | 08/08 |

**SEEDING & MULCHING**

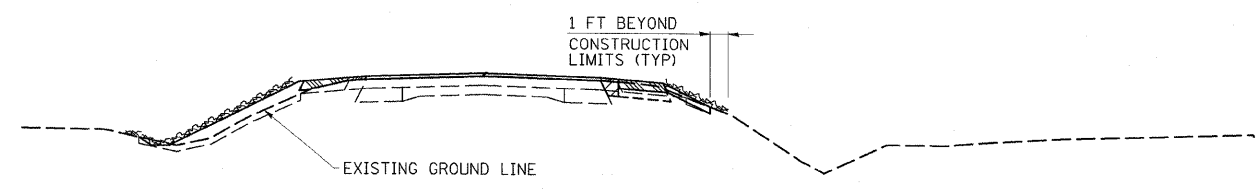

INDICATES LIMITS OF SEEDING AND MULCHING

**GENERAL NOTES**

IN GENERAL, ALL EARTH SURFACES DISTURBED DURING CONSTRUCTION OPERATIONS SHALL BE SEEDING AND MULCHED UPON COMPLETION OF ALL GRADING OPERATIONS.

FERTILIZER NUTRIENTS AND LIMESTONE SHALL BE APPLIED TO ALL SEEDED AREAS.

THE RATES OF APPLICATION OF FERTILIZER, MULCH AND LIMESTONE SHALL BE AS SPECIFIED IN THE SPECIAL PROVISIONS.

SECTIONS 250 AND 251 OF THE STANDARD SPECIFICATIONS SHALL GOVERN THIS WORK EXCEPT AS SPECIFIED HEREIN OR AS NOTED IN THE SPECIAL PROVISIONS.

**MISCELLANEOUS DETAILS**  
**US 45 OVER GROVE CREEK**  
**FAP RTE 328 - SECTION (6BR-1)B-1**  
**CLAY COUNTY**  
**STATION 1413+68.00**  
**STRUCTURE NO. 013-2009**