



TIE POINT  
CUT " + "  
P.O.T. STA 144+00

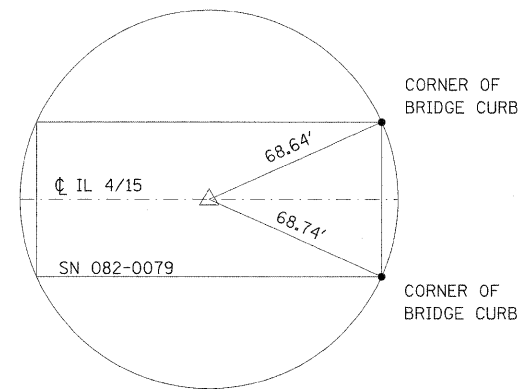

TIE POINT  
CUT " + "  
P.O.T. STA 149+50

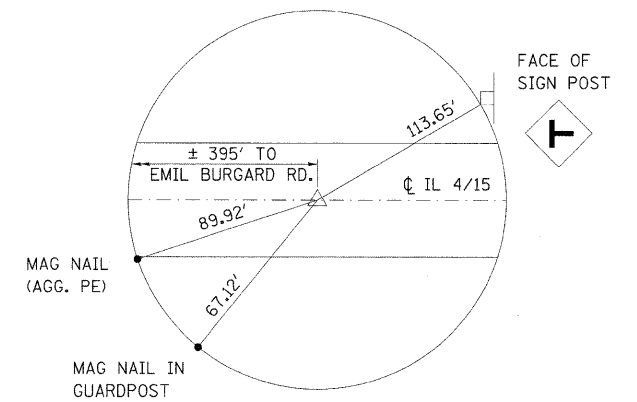

TIE POINT  
MAG NAIL  
P.O.T. STA 156+00

BENCHMARKS

- BM 13 - RR SPIKE IN POWER POLE AT SW CORNER OF WEST MAIN ST (IL 15) & SOUTH 3RD ST IN FAYETTEVILLE  
STA. 117+67.5  
OFFSET = 24' RT  
ELEV = 413.481
- BM 14 - CUT SQUARE ON BRIDGE CURB (NOT WINGWALL) AT NE CORNER OF IL 15/IL 4 BRIDGE OVER KASKASKIA RIVER (SN 082-0077)  
STA. 137+06  
OFFSET = 16.9' LT  
ELEV = 406.805
- BM 1 - CUT SQUARE ON BRIDGE CURB AT NE CORNER OF IL 15/IL 4 BRIDGE OVER KASKASKIA OVERFLOW (SN 082-0078)  
STA. 144+77  
OFFSET = 17.5' LT  
ELEV = 407.525

FILE NAME =	USER NAME = #USER#	DESIGNED -	REVISED -	<b>STATE OF ILLINOIS DEPARTMENT OF TRANSPORTATION</b>	<b>TIE POINTS AND BENCHMARKS</b>			F.A.P. RTE. 817	SECTION 421B-1	COUNTY ST. CLAIR	TOTAL SHEETS 56	SHEET NO. 6
#FILE#		DRAWN -	REVISED -					SCALE: SHEET NO. OF SHEETS STA. TO STA.			CONTRACT NO. 76885	
		CHECKED -	REVISED -		FED. ROAD DIST. NO. ILLINOIS FED. AID PROJECT							
		DATE -	REVISED -									