

F.A.S.	SECTION	COUNTY	TOTAL SHEETS	SHEET NO.
883	06-00102-00-RS	WHITE	6	1
FED. ROAD DIST. NO. 4		ILLINOIS	NORRIS CITY WEST	
LEC JOB # H081002WH			CONTRACT # 99348	

INDEX OF SHEETS

SHEET NO.	DESCRIPTION
1	TITLE SHEET, SUMMARY OF QUANTITIES
2	TYPICAL SECTIONS, GENERAL NOTES SCHEDULE SUPERELEVATION RATES
3-4	DETAILS OF TAPERS, STREETS, & SIDEROADS
5	SCHEDULES
6	DETAILS

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
**PLANS FOR PROPOSED FEDERAL-AID
S.T.R. & T.A.R.P. PROJECT**

F.A.S. 883(CH 16) SECTION 06-00102-00-RS WHITE COUNTY
PROJECT SR-883(117) JOB NO. C-99-502-07

**THE FOLLOWING STANDARDS ARE A PART OF THESE PLANS
AND ARE INCLUDED AFTER SHEET 6.**

000001-05	STANDARD SYMBOLS, ABBREVIATIONS & PATTERNS (6 SHEETS)
406201-01	MAILBOX TURNOUT
701006-03	OFF-RD OPERATIONS, 2-L, 2-W, 4.5 m (15') TO PAVEMENT EDGE FOR SPEEDS ≥ 45 MPH
701301-03	LANE CLOSURE, 2L, 2W, SHORT TIME OPERATIONS,
701306-02	LANE CLOSURE, 2L, 2W, SLOW MOVING OPERATIONS - DAY ONLY FOR SPEEDS ≥ 45 MPH
701311-03	LANE CLOSURE, 2L, 2W, MOVING OPERATIONS - DAY ONLY
701336-05 701901-01	LANE CLOSURE, 2-L, 2-W, Work Areas INSERTS, etc., TRAFFIC CONTROL DEVICES (3 SHEETS)
780001-02	TYPICAL PAVEMENT MARKINGS (2 SHEETS)
781001-03	TYPICAL APPLICATIONS RAISED REFLECTIVE PAVEMENT MARKERS


SUMMARY OF QUANTITIES

CODE NUMBER	ITEM	UNIT	QUANTITY
* 21400100	GRADING AND SHAPING DITCHES	FOOT	550.00
28100807	STONE DUMP RIPRAP, CLASS A4	TON	80.00
40600100	BITUMINOUS MATERIALS (PRIME COAT)	GALLON	2284.00
40600635	LEVELING BINDER (MACHINE METHOD), N70	TON	4840.00
40600990	TEMPORARY RAMP	SQ YD	25.00
40603310	HOT-MIX ASPHALT SURFACE COURSE, MIX "C", N50	TON	3510.00
44000157	HOT-MIX ASPHALT SURFACE REMOVAL, 2"	SQ YD	1161.00
48101200	AGGREGATE SHOULDERS, TYPE B	TON	2563.00
* 54223453	REMOVE & RELAY PIPE CULVERTS 18"	FOOT	21.00
* 54223459	REMOVE & RELAY PIPE CULVERTS 24"	FOOT	8.00
* 54223471	REMOVE & RELAY PIPE CULVERTS 36"	FOOT	4.00
* 54223489	REMOVE & RELAY PIPE CULVERTS 54"	FOOT	20.00
* 54223495	REMOVE & RELAY PIPE CULVERTS 60"	FOOT	60.00
59300100	CONTROL LOW-STRENGTH MATERIAL	CU YD	10.00
60266600	VALVE BOXES TO BE ADJUSTED	EACH	2.00
60300305	FRAMES AND LIDS TO BE ADJUSTED	EACH	10.00
* 67100100	MOBILIZATION	L SUM	1.00
70100460	TRAFFIC CONTROL AND PROTECTION, STANDARD 701306	L SUM	1.00
70100600	TRAFFIC CONTROL AND PROTECTION, STANDARD 701336	L SUM	1.00
70300100	SHORT-TERM PAVEMENT MARKING	FOOT	3956.00
△ 78001110	PAINT PAVEMENT MARKING-LINE 4"	FOOT	32157.00
△ 78100100	RAISED REFLECTIVE PAVEMENT MARKER	EACH	164.00
* XX003140	SHORT-TERM PAVEMENT MARKING REMOVAL	FOOT	1319.00
* XX127400	PAVEMENT REMOVAL AND REPLACEMENT (SPECIAL)	TON	6.00

△ SPECIALTY ITEMS

DESIGN CLASS - RURAL MAJOR COLLECTOR
DESIGN SPEED = 50 MPH
CURRENT A.D.T. = 1,330
CONTRACT # = 99348


J.U.L.I.E.
JOINT UTILITY LOCATION INFORMATION FOR EXCAVATION
1-800-892-0123

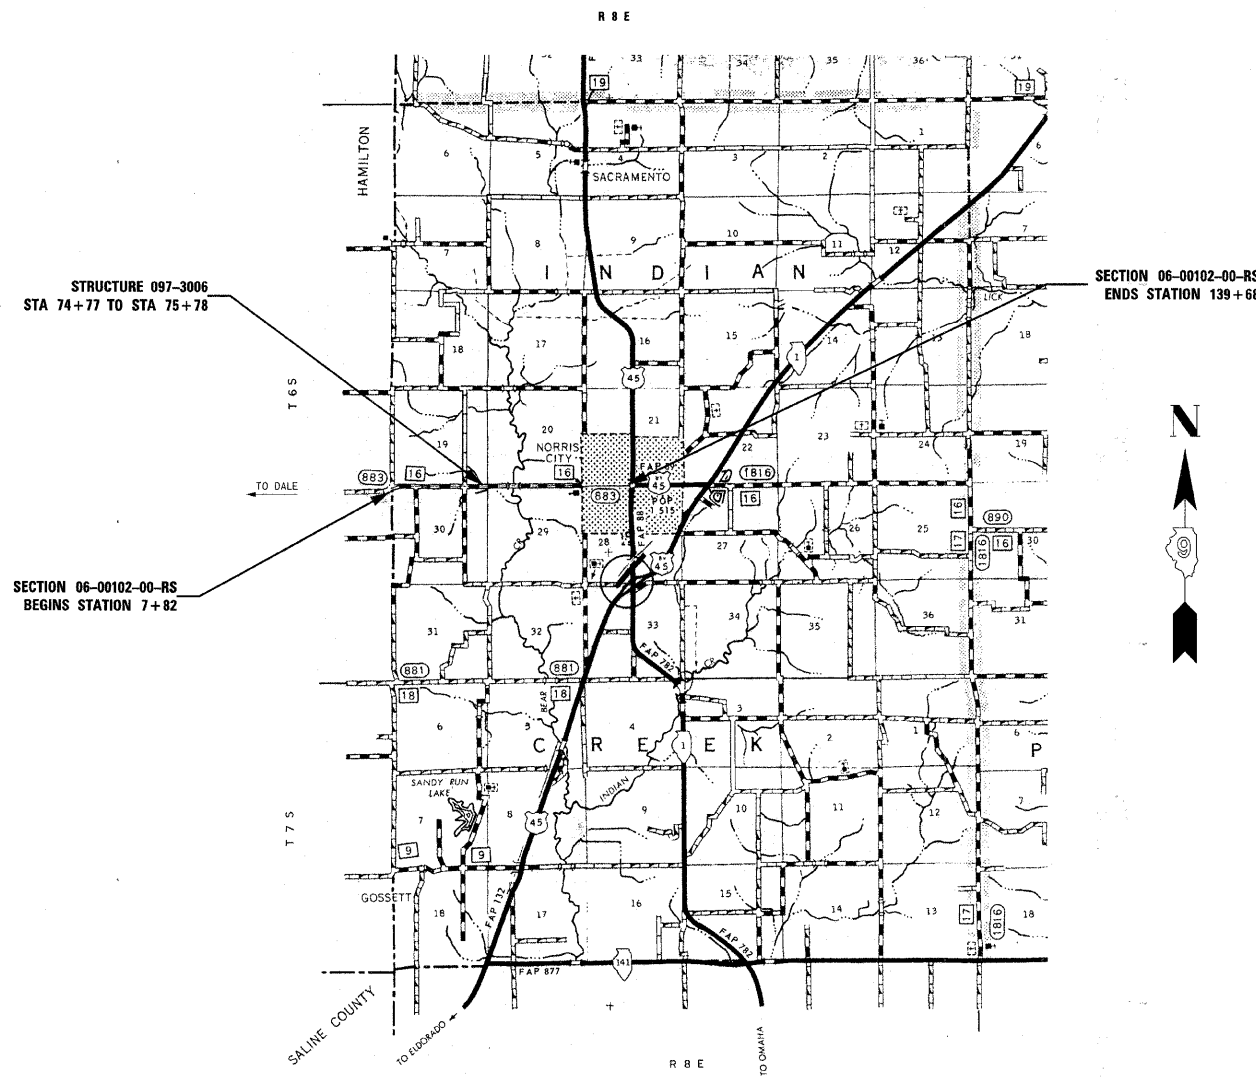

LAYOUT

APPROXIMATE SCALE 1 INCH = 1 MILE

	MILES	
GROSS LENGTH	13186 FT	2.497 MILES
OMISSION	0 FT	0.000 MILES
NET LENGTH	13186 FT	2.497 MILES

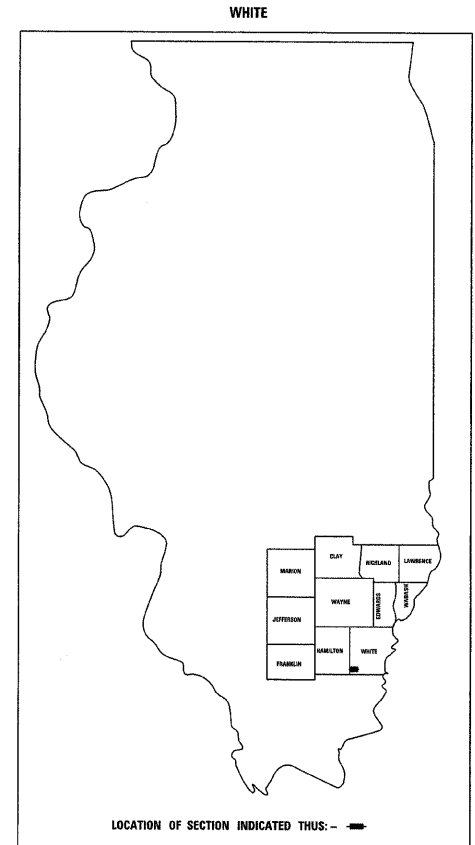

323 W. 3RD ST.
P.O. BOX 160
MT. CARMEL, IL
62863
PHONE:
(618)-262-8651
FAX:
(618)-263-3327

405 W STATE ST.
SUITE 1
PRINCETON, IN
47670
PHONE:
(812)-386-7611
FAX:
(812)-385-2812



PROFESSIONAL
DESIGN FIRM
LAND SURVEY &
PROFESSIONAL
ENGINEERING
CORPORATION
184-000887
(62-032435)(35-002769)



AARON M. MEFFORD
NAME
Aaron M. Mefford
SIGNATURE
10-2-08
DATE
11-30-09
EXPIRES

STATE OF ILLINOIS
DEPARTMENT OF TRANSPORTATION

APPROVED 9-30-08
Sean K...
COUNTY ENGINEER

PASSED 10/9/08
Dennis W. Hill
ENGINEER OF LOCAL ROADS AND STREETS

RELEASING FOR BID
BASED ON LIMITED
REVIEW 10/9/08
Mary C. Lamie
MARY C. LAMIE, P.E.
DEPUTY DIRECTOR OF HIGHWAYS
REGION FIVE ENGINEER